

Understanding and planning sensor technology.

The right solution for any space.

The right solution for any application.

Long corridors, irregularly shaped stairwells, one-person or open-plan offices, WCs, washrooms or warehouses: commercial properties come with all kinds of different spatial situations. STENEL has been devoted to the task of developing the best possible lighting control solution for each and every one of them for over 25 years. As a specialist and technology in this field, we employ all of the four commonly used sensor technologies in our products out of conviction. So that they can reliably detect any movement over every last inch of space – in absolutely any situation.

In this brochure, we show you which sensor technology is best for the particular room situation – and how we optimise their use in our products. Doing so, we want to make it quick and easy for you to find the ideal sensor for any specific application. Leaving you to concentrate on the most important part of your work: making sure that your customers are fully satisfied by installing the best possible lighting control solution.




Contents

Sensor technologies	4
Corridor / passageway	6
Stairwell	8
One-person office	10
Open-plan office	11
Conference room	12
Classroom	13
WC / washroom	14
Side room	16
Multi-storey / underground car park	18
Sports hall	20
Equipment room	21
High-bay warehouse	22
Warehouse	23
Sensors for outdoors	24
SensorLights for outdoors	26
Floodlight projectors for outdoors	28
Sensor-switched floodlights for outdoors	29
KNX sensors	30
DALI sensors and SensorLights	32
PROLog	40
RELUX, DIALux	41

Our 4 sensor technologies. The right solution for any application.


Passive infrared

Responds to moving sources of heat.

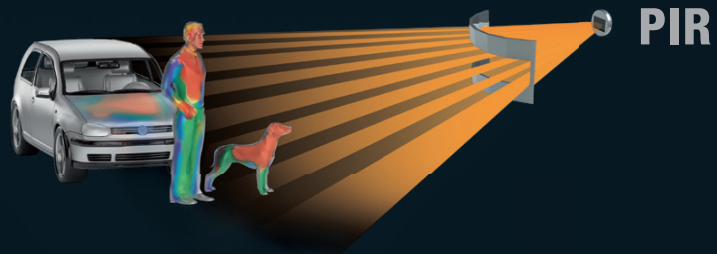


High frequency

Can even see through thin walls.

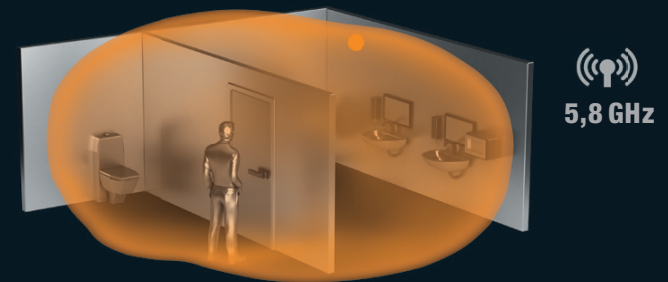


Ultrasonic

Fills the entire room and also detects movement around objects.

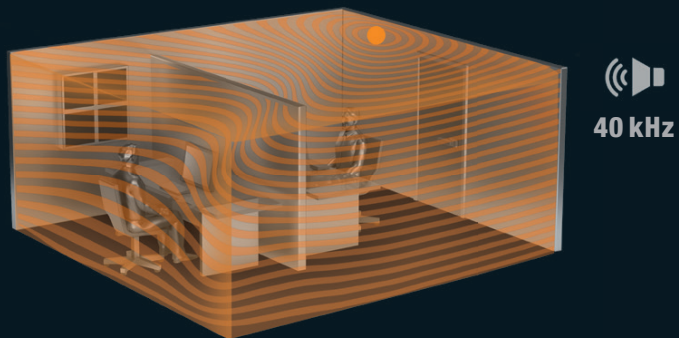

Camera sensor system

Only detects people and can also count them.

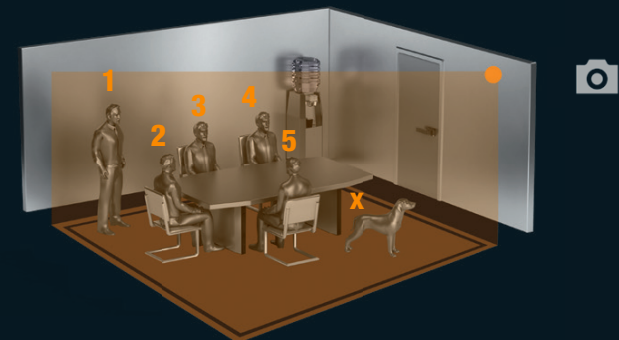

6



Corridor/ passageway Sensors

It is crucial for a corridor sensor to be good at detecting radial movements. This means in situations when the sensor is approached from the front. STEINEL has developed special sensors for corridors, aisles and passageways on the basis of high-frequency technology or ultrasound – with a 'radial reach' of 10 metres in each direction. The DUAL HF or the DUAL US makes the perfect solution for a ceiling height of up to 3.50 m!

Special applications

- Opt for the DUAL US or Single US in situations involving widespread use of stud walls.
- The IS 345 infrared sensor is the right choice for a ceiling height of up to 5 m.

Technical advice

Reach of the ultrasonic and high-frequency sensors is easy to set by potentiometer. The IS 345 comes complete with practical shrouds.



Presence detector **Dual HF**

- High-frequency corridor sensor
 - HF-sensor detects through thin walls and suspended ceilings
 - For corridors, passageways and aisles in residential and office buildings
 - 20 m reach, 10 m in each direction
 - Detects everything equally well whichever direction it is approached from
 - COM1, KNX, DIM, DALI
- For EANs, see page 36



Motion detector **IS 345**

- Infrared corridor sensor
 - For corridors, passageways and aisles in residential and office buildings
 - Detection zone 20 m long and 5 m wide
 - Ceiling installation at a height of up to 5 m
 - Lens specifically geared to corridors, IP54
- For EANs, see page 36



Presence detector **Dual US**

- Ultrasonic corridor sensor
- Ultrasound envelops objects but does not pass through
- For corridors and passageways in residential and office buildings
- 20 m reach, 10 m in each direction
- Detects everything equally well whichever direction it is approached from
- COM1, COM2, DIM

For EANs, see page 36



Presence detector **Single US**

- Ultrasonic corridor sensor
 - Ultrasound envelops objects but does not pass through
 - For corridors, passageways and aisles in residential and office buildings
 - 10 m reach in one direction only
 - Perfect detection in one direction
 - COM1, COM2, DIM
- For EANs, see page 36

Corridor/ passageway SensorLights

SensorLights from STEINEL are the perfect solution for new build and refurbishment. The high-frequency sensor invented by STEINEL is invisibly integrated in the light and only switches light ON when it is needed. Simply connect the light to the power supply, adjust the sensor by potentiometer – that's all there is to it! High-efficiency STEINEL LED systems on the cutting edge of technology provide contemporary and energy-efficient lighting.

Installation advice

- All models can be used equally well as wall or ceiling lights.

Technical advice

Models Q1, S1 and S2 can be interconnected bi-directionally by wireless signal and provide an optional basic lighting-level function.



Sensor-switched indoor light **RS PRO LED Q1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 27.5 W giving 1960 lumens, 3000 K or 4000 K
- Optional 10%–50%, basic light level, bi-directional wireless interconnection capability
- Group parameterisation, switches OFF in relation to daylight

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED S1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 16 W giving 972 lumens, 3000 K or 4000 K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED S2**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 28 W giving 1440 lumens, 3000 K or 4000 K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED R1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 11 W giving 770 lumens, 3000 K or 4000 K
- Wired interconnection

For EANs, see page 39

7



8



Stairwell Sensors

In stairwells, direct detection of persons going up or down the stairs is often very restricted. This is because of the winding geometry of stairwells that infrared technology is not designed for. This is why STEINEL offers sensors based on high-frequency technology and ultrasound which guarantee perfect detection in stairwells.

Installation advice

- Use high-frequency sensors in normal building situations and for 360-degree detection
- Choose the Single US ultrasonic sensor for small and winding stairwells

Technical advice

The HF 360 and Single US models permit semi-automatic operation for switching light ON manually and OFF again automatically.



Motion detector **HF3600**

- 360° high-frequency motion detector
- HF-sensor can detect through suspended ceilings
- For indoor wall and corner mounting
- 8 m in diameter, infinitely variable

For EANs, see page 36



Presence detector **HF360**

- 360° high-frequency presence detector
- HF-sensor detects through thin walls and suspended ceilings
- 12 m reach in diameter, ceiling mounting
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36




Presence detector **Single US**

- Ultrasonic corridor sensor
- Ultrasound envelops objects but does not pass through
- For corridors, passageways and aisles in residential and office buildings
- 10 m reach in one direction only
- Perfect detection in one direction
- COM1, COM2, DIM

For EANs, see page 36

9

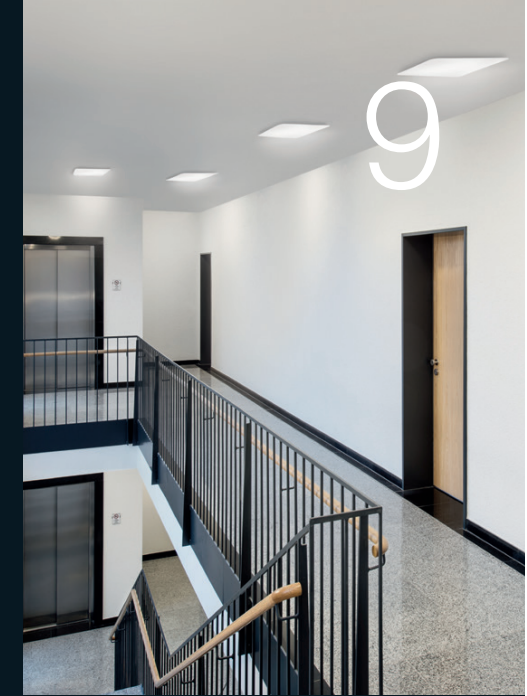

Stairwell SensorLights

SensorLights from STEINEL are the perfect solution for new build and refurbishment. The high-frequency sensor invented by STEINEL is invisibly integrated in the light and only switches light ON when it is needed. Simply connect the light to the power supply, adjust the sensor by potentiometer – that's all there is to it! High-efficiency STEINEL LED systems on the cutting edge of technology provide contemporary and energy-efficient lighting.

Installation advice

- All models can be used equally well as wall or ceiling lights.

Technical advice

The new Remote Group Setting function featured in the RS PRO 5800/5850 LED models minimises the effort involved in setting your lights. You can simply send the settings of one light to all of the others by remote control!



Sensor-switched indoor light **RS PRO LED Q1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 27.5 W giving 1960 lumens, 3000 K or 4000 K
- Optional 10% – 50%, basic light level, bi-directional wireless interconnection capability
- Group parameterisation, switches OFF in relation to daylight

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED S2**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 28 W giving 1440 lumens, 3000 K or 4000 K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 39



Sensor-switched indoor light **RS PRO 5800 LED**

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8 m reach
- 40 W giving 4600 lumens, 4000 K
- Intelligent swarm function on DALI bus
- Group parameterisation
- Optional 10–50% basic light level, slave version available

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED R1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8 m reach
- 11 W giving 770 lumens, 3000 K or 4000 K
- Easy-Install concept

For EANs, see page 39

10



One-person office Sensors

Detecting the smallest of movements is particularly important in offices. High-resolution presence detectors from STEINEL even make sure that the light doesn't go out when sitting at the computer. Besides precision infrared sensors, STEINEL now also offers the highly sensitive ultrasonic technology from the USA.

Benefits from STEINEL

- With an overall height of just 4mm, the IR Quattro SLIM is almost invisible
- The IR Quattro lets you limit detection to any chosen work areas
- The ultrasonic US 360 detects even the smallest of movement despite obstacles and room dividers

Technical advice

Take advantage of natural daylight using constant-lighting control in the DIM, DALI & KNX versions for maximum energy efficiency.

Open-plan office Sensors


With STEINEL presence detectors you can watch over every last inch of large offices with just a few sensors. Besides the advanced infrared sensors, STEINEL now also offers the successful combination of infrared and ultrasonic technology. This brings tremendous reliability and efficiency to controlling lighting in open-plan offices.

Benefits from STEINEL

- The IR Quattro HD provides a presence detection zone of up to 64 square metres as well as exact square detection footprint restricted to specific work groups
- By combining infrared and ultrasonic technology, DualTech opens up completely new technical capabilities, such as switching light ON by infrared and detecting presence by ultrasound

Technical advice

Install the DualTech in the corner at the entrance to the room so as to maximise tangential detection when people enter.

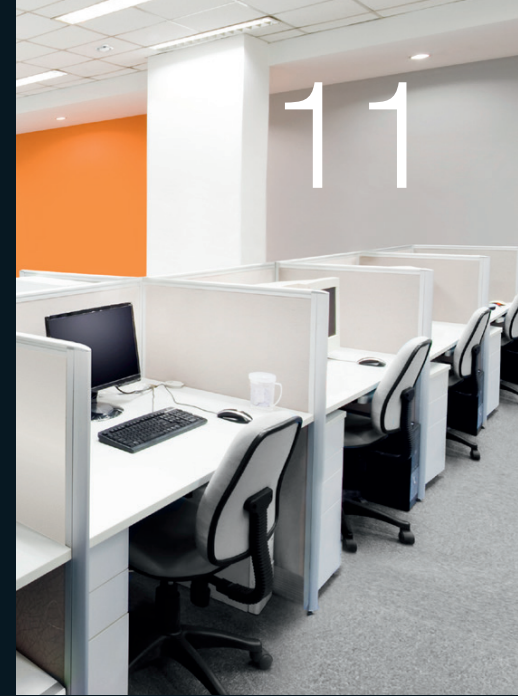

11



Presence detector IR Quattro SLIM

- Ultra-slim 360° infrared presence detector
- Overall height of just 4 mm, ceiling mounting
- Square presence detection zone covering 16 m²
- Only retina lens of its kind in the world
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36



Presence detector IR Quattro

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 16 m², ceiling mounting
- COM1, COM2, KNX, DIM, DALI, wireless

For EANs, see page 36



Presence detector IR Quattro HD

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 64 m²
- Ceiling installation at a height of up to 10 m
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 37



Presence detector DualTech

- 360° DualTech presence detector
- Infrared + ultrasound for best detection quality
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



Presence detector US360

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37

12

Conference room Sensors

Especially in conference rooms, the demands on sensors are very high. To cope with the particular challenges of office spaces, STEINEL offers innovative solutions that are based on infrared and ultrasound as well as the camera sensor system as the only one of its kind in the world.

Benefits from STEINEL

- The IR Quattro HD provides a presence detection zone of up to 64 square metres as well as exact square detection footprint restricted to chosen areas
- Ultrasonic sensor US 360 is ideal for pendant lights or sound insulation elements
- The HPD 1 can count the number of people in a room, delivering highly relevant information for overall building automation

Technical advice

The HPD1 lets you set up three precision detection zones!

Classroom Sensors

Using sensors to control lighting in classrooms is a real challenge. Particular during tests, when pupils hardly move, lighting must not be allowed to go out. This is where you need excellent detection performance with the best sensor technology from STEINEL.

Benefits from STEINEL

- With its presence detection zone of 64 square metres, the IR Quattro HD can cover an entire classroom.
- The US 360 monitors even the smallest of movement despite possible obstructions to the line of sensor vision, e.g. from partitions or large visual display units in the room.

Technical advice

Install the IR Quattro SLIM DALI for controlling two rows of luminaires for room light and the IR Quattro HD for the blackboard lighting. This is where you have options for automatic and manual control, e.g. dimming the light.

13



Human Presence Detector HPD1

- 120° camera sensor as the only one of its kind in the world
- Detects and counts people sitting and standing
- 3 detection zones can be precision-defined, wall mounting
- IP and KNX interface

For EANs, see page 37



Presence detector IR Quattro

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 16 m², ceiling mounting
- COM1, COM2, KNX, DIM, DALI, wireless

For EANs, see page 36



Presence detector IR Quattro HD

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 64 m²
- Ceiling installation at a height of up to 10 m
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 37



Presence detector DualTech

- 360° DualTech presence detector
- Infrared + ultrasound for best detection quality
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



Presence detector IR Quattro HD

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 64 m²
- Ceiling installation at a height of up to 10 m
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 37



Presence detector US360

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



Presence detector IR Quattro SLIM

- Ultra-slim 360° infrared presence detector
- Overall height of just 4 mm, ceiling mounting
- Square presence detection zone covering 16 m²
- Only retina lens of its kind in the world
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36



Presence detector US360

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



WC / washroom Sensors

In WCs and washrooms, cubicles and partitions make it hard to detect movement. Conventional infrared technology makes it necessary to install a large number of sensors to ensure well-functioning detection – in fact, a sensor above each WC. That's expensive and involves a lot of work.

Benefits from STEINEL

- The high-frequency technology developed by STEINEL is capable of reliably detecting movement through stud walls!
This means you only need a fraction of the sensors you would with infrared technology.
- The new ultrasonic technology is the ideal solution for irregularly shaped rooms.
- The IS D360 sensor can be neatly installed as an infrared solution in standard GU10 spots.

Technical advice

Use the ceiling adapter for installing the HF 360 on a suspended ceiling, leaving it hidden from view and vandalproof.



Presence detector **HF 360**

- 360° high-frequency presence detector
- HF-sensor detects through thin walls and suspended ceilings
- 12m reach in diameter, ceiling mounting
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36



HF ceiling adapter

- for installation on suspended ceilings

EAN 4007841 006600



Motion detector **IS D360**

- 360° infrared motion detector
- Concealed wiring, ceiling mounting at a height of up to 2.5m
- 16m reach in diameter
- 3 pyro sensors, IP20

For EANs, see page 37



Presence detector **US360**

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 28m², ceiling mounting
- COM1, COM2, DIM


For EANs, see page 37

WC / washroom SensorLights

In WCs and washrooms, SensorLights can really demonstrate their advantages. The sensor integrated in the light even detects movements behind partitions, e.g. in WC cubicles. The high-frequency sensor invented by STEINEL is invisibly integrated in the light and only switches light ON when it is needed. The sensor-switched LED downlighter in particular is the ideal solution for washrooms and WCs!

Technical advice

Take advantage of the low-cost master/slave interconnection capability to create lighting groups with the LED downlighter.

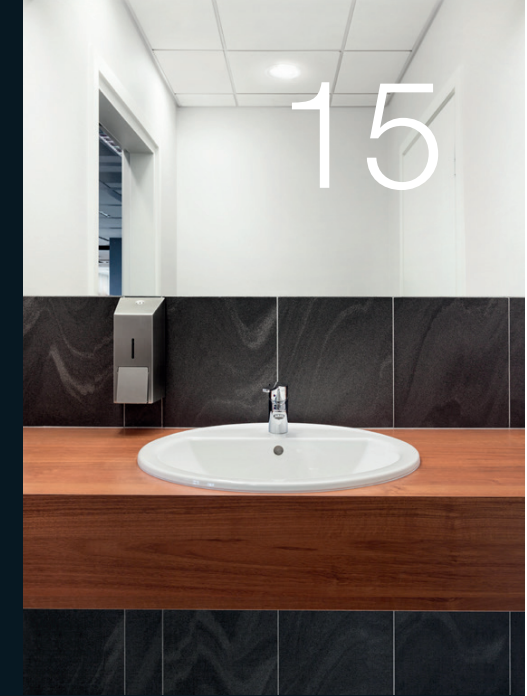

Sensor-switched indoor light **RS PRO LED S1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8m reach
- 16W giving 972 lumens, 3000K or 4000K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 39



Sensor-switched downlighter **RS PRO DL LED 22W**

- Sensor-switched LED downlighter
- 360° high-frequency sensor, 8m reach
- 22W giving 1400 lumens, 3000K or 4000K
- Optional 10% basic light level, slave version available

For EANs, see page 39



Sensor-switched downlighter **RS PRO DL LED 15W**

- Sensor-switched LED downlighter
- 360° high-frequency sensor, 8m reach
- 15W giving 925 lumens, 3000K or 4000K
- Optional 10% basic light level, slave version available

For EANs, see page 39



Sensor-switched indoor light **RS PRO LED R1**

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8m reach
- 11W giving 770 lumens, 3000K or 4000K
- Easy-Install concept

For EANs, see page 39

Side room Sensors

Particularly in little used side rooms, the light is often left on when there's nobody there. Depending on room type, STEINEL offers you three technologies based on infrared, high frequency and ultrasound.

Benefits from STEINEL

- Use the IR Quattro and IR Quattro SLIM for small to medium-sized rooms
- The HF 360 is the optimum solution where the influence of temperature makes infrared detection difficult (e.g. printer rooms)
- The US 360 detects the smallest of movements despite obstacles to the line of sensor vision (e.g. cabinets)

Technical advice

All sensors can also be configured using the optional remote controls.

Side room SensorLights

Side rooms often have no window, making them dark when you enter them. This is where you want the light to come on quickly. Instead, you sometimes have to fumble around to find the switch. SensorLights from STEINEL are the ideal solution here.

Benefits from STEINEL

- Invisibly integrated in the light, the high-frequency sensor reliably switches the light ON when anyone enters the room
- High-efficiency STEINEL LED systems on the cutting edge of technology provide contemporary and energy-efficient lighting

Technical advice

Choose one of the many different shades for the RS PRO LED S1 for impact resistance or maximum light output.



Presence detector IR Quattro SLIM

- Ultra-slim 360° infrared presence detector
- Overall height of just 4 mm, ceiling mounting
- Square presence detection zone covering 16 m²
- Only retina lens of its kind in the world
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36



Presence detector IR Quattro

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 16 m², ceiling mounting
- COM1, COM2, KNX, DIM, DALI, wireless

For EANs, see page 36



Sensor-switched indoor light RS PRO LED S1

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8m reach
- 16W giving 972 lumens, 3000K or 4000K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 39



Sensor-switched downlighter RS PRO DL LED 15W

- Sensor-switched LED downlighter
- 360° high-frequency sensor, 8m reach
- 15W giving 925 lumens, 3000K or 4000K
- Optional 10% basic light level, slave version available

For EANs, see page 39



Presence detector US360

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 28 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



Presence detector HF360

- 360° high-frequency presence detector
- HF-sensor detects through thin walls and suspended ceilings
- 12 m reach in diameter, ceiling mounting
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 36



Sensor-switched indoor light RS PRO LED R1

- Sensor-switched LED indoor light
- 360° high-frequency sensor, 8m reach
- 11 W giving 770 lumens, 3000K or 4000K
- Easy-Install concept

For EANs, see page 39



Sensor-switched indoor light RS PRO 5800 LED

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 40W giving 4600 lumens, 4000K
- Intelligent swarm function on DALI bus
- Group parameterisation
- Optional 10–50% basic light level, slave version available

For EANs, see page 39



Multi-storey/ underground car park Sensors

We've all seen it – multi-storey car parks are always brightly lit when there's nobody around. This is where on-demand lighting can make huge savings. These areas need to be provided with efficient coverage using just a few sensors. Infrared sensors are very well suited for this job.

Benefits from STEINEL

- The IS 3360 covers an area of over 1000 square metres with only one sensor
- The HF 3360 is ideal at entrances for switching light ON instantly. Because light is switched ON as soon as the sensor detects the door opening.

Technical advice

The SensiQ can be wall and ceiling mounted.



Motion detector IS 3360

- 360° infrared motion detector
 - Watches over up to 1,000 m², 20m reach radius
 - Ceiling installation at a height of up to 4m
 - 3 pyro sensors, IP54
- For EANs, see page 37



Motion detector sensIQ

- 300° motion detector for outdoors
 - Wall, corner & ceiling mounting
 - Three 100° zones and sneak-by guard
 - Each zone can be mechanically adjusted from 2–20m
 - Installation at a height of up to 5m, IP54
 - Additional wireless, soft-start and potential-free modules
- For EANs, see page 37

Multi-storey/ underground car park Sensorlights

Illuminating multi-storey car parks safely and reliably demands the use of powerful lights that use up a lot of energy. Often, entire storeys are illuminated when nobody's there. Using STEINEL Sensorlights, the light is switched ON when it's needed, saving a large amount of energy.

Benefits from STEINEL

- Invisibly integrated in the light, the high-frequency sensor reliable switches the light ON
- Lights can be switched ON and OFF in groups
- Highly efficient STEINEL LED system on the cutting edge of technology
- The basic light-level function is available for safety lighting at night

Technical advice

The new and highly innovative swarm function from the RS PRO 5800 LED for the first time permits dynamic lighting.



Sensor-switched indoor light RS PRO 5800 LED

- Sensor-switched LED diffuser luminaire
 - For rugged applications: IP66, IK07
 - 360° high-frequency sensor, 8m reach
 - 40W giving 4600 lumens, 4000K
 - Intelligent swarm function on DALI bus
 - Group parameterisation
 - Optional 10–50% basic light level, slave version available
- For EANs, see page 39



Sensor-switched indoor light RS PRO 5002 LED

- T5 sensor-switched LED diffuser luminaire
 - 360° high-frequency sensor, 8m reach
 - 2x 28W T5 and LED orientation light, 6.7 W
 - IP65 and IK07, also available as a slave version
- For EANs, see page 40



Sensor-switched indoor light RS PRO 5850 LED

- Sensor-switched LED diffuser luminaire
 - For rugged applications: IP66, IK07
 - 360° high-frequency sensor, 8m reach
 - 52W giving 5820 lumens, 4000K
 - Intelligent swarm function on DALI bus
 - Group parameterisation
 - Optional 10–50% basic light level, slave version available
- For EANs, see page 39

20

Sports hall Sensors

Ceilings in sports halls are often 8 – 10m high. Detecting movement reliably in environments like this is no easy task. STEINEL has created a convincing solution for this in the form of the IR Quattro HD.

Benefits from STEINEL

- The IR Quattro HD guarantees reliable detection from a ceiling height of up to 10m
- With its four pyro sensors, it effortlessly covers an area of up to 1,300 square metres when installed at a height of 10m
- You can protect the sensor from any damage with an optional metal cage

Technical advice

You can set the sensor with the optional remote control for added convenience.



Presence detector **IR Quattro HD**

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 64 m²
- Ceiling installation at a height of up to 10m
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 37



Guard cage **IR Quattro HD**

- Prevents damage from balls or vandals

EAN 4007841 003036

Equipment room Sensors / SensorLights

Equipment rooms on schools and other facilities, like gyms, are rooms in which the light is often left on unused.

Benefits from STEINEL

- Ultrasonic sensor US 360 is ideal for irregularly shaped rooms, e.g. changing rooms with lockers, as ultrasound propagates throughout the room
- Infrared sensor IS 3360 is the perfect solution for large, open spaces
- As impact-resistant, sensor-switched luminaires, SensorLights RS PRO 5800 LED and RS PRO LED S1 IP 65 are equipped with an integrated HF-sensor for the toughest of applications

Technical advice

On all STEINEL indoor lights, the push-in shrouds supplied with them let you mask out specific areas of the detection zone all very easily.



Presence detector **US 360**

- 360° ultrasonic presence detector
- Ultrasound envelops objects but does not pass through
- Presence detection zone covering 23 m², ceiling mounting
- COM1, COM2, DIM

For EANs, see page 37



Motion detector **IS 3360**

- 360° infrared motion detector
- Watches over up to 1,000 m², 20m reach radius
- Ceiling installation at a height of up to 4m
- 3 pyro sensors, IP54

For EANs, see page 37



Sensor-switched indoor light **RS PRO 5800 LED**

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 40W giving 4600 lumens, 4000K
- Intelligent swarm function on DALI bus
- Group parameterisation
- Optional 10–50% basic light level, slave version available

For EANs, see page 39




Sensor-switched indoor light **RS PRO LED S1 IP65**

- Sensor-switched LED indoor light
- For rugged applications: IP65, IK10
- 360° high-frequency sensor, 8m reach
- 16W giving 1191 lumens (opal 900 lumens), 4000K
- Optional 10% basic light level, bi-directional wireless interconnection capability

For EANs, see page 40

21

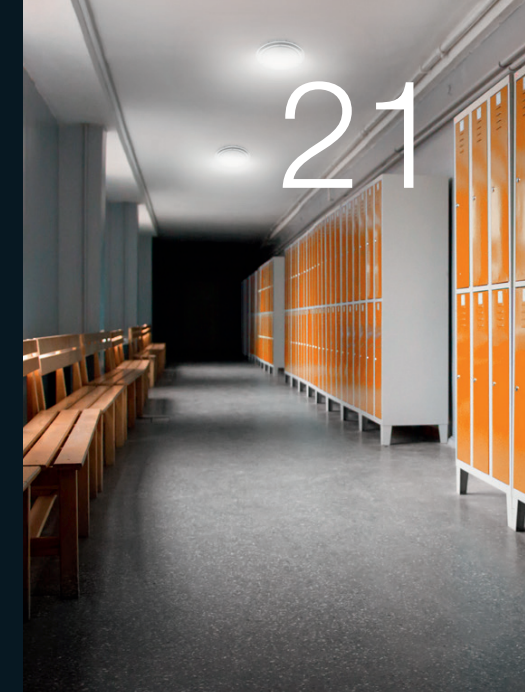



22

High-bay warehouse Sensors

In high-bay warehouses, ceilings of up to 14m in height place exacting demands on the sensor technology. On the one hand, it must reliably detect movements from these heights. On the other, it must only detect movement in the particular aisle it covers. Infrared is the only technology suitable for these heights.

Benefits from STEINEL

- For large expanses and ceilings as high as 10m we recommend the IR Quattro HD for covering areas of up to 1,300 square metres with just one sensor
- For warehouse aisles, STEINEL offers the IS 345 MX Highbay with a reach of 30m per aisle
- Existing highbay lights can automated directly by fitting HBS 300 and 200 sensors to the light

Technical advice

The sensors can be interconnected for covering even larger areas.



Motion detector IS345 MX Highbay

- Infrared corridor sensor
- High-bay warehouse and aisles up to 12m high
- Detection zone 30m long and 4m wide
- Lens specifically geared to corridors, IP54

For EANs, see page 38



Motion detector HBS 300 Highbay

- 360° infrared motion detector
- For fitting to existing highbay lights
- Warehouses and indoor spaces up to 14m high
- 18m reach radius

For EANs, see page 38



Presence detector IR Quattro HD

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Ceiling installation at a height of up to 10m
- COM1, COM2, KNX, DIM, DALI

For EANs, see page 37



Motion detector HBS 200 Highbay

- Infrared corridor sensor
- For fitting to existing highbay lights
- High-bay warehouse and aisles up to 14m high
- Detection zone 30m long and 4m wide

For EANs, see page 38

Warehouse Sensorlights

Almost all warehouse facilities are illuminated by artificial light and in most cases lighting is left on all the time during working hours although it is only needed for a short period. Using STEINEL Sensorlights, the light is only switched ON when it's needed. Otherwise it is off or can be dimmed to a stand-by mode. In short – using automatic lighting in warehouses can produce very high potential savings.

Benefits from STEINEL

- Invisibly integrated in the light, the high-frequency sensor reliable switches the light ON, and lights can be operated in groups
- High-efficiency STEINEL LED systems on the cutting edge of technology
- All lights are also available in a slave version

Technical advice

Models RS PRO 5800 & 5850 LED provide the capability of setting basic light level from 10–50% and the main light from 50–100%.



Sensor-switched indoor light RS PRO 5800 LED

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 40W giving 4600 lumens, 4000K
- Intelligent swarm function on DALI bus

Group parameterisation

- Optional 10–50% basic light level, slave version available

For EANs, see page 39




Sensor-switched indoor light RS PRO 5002 LED

- T5 sensor-switched LED diffuser luminaire
- 360° high-frequency sensor, 8m reach
- 2x 28W T5 and LED orientation light, 6,7 W

- IP65 and IK07, also available as a slave version

For EANs, see page 40

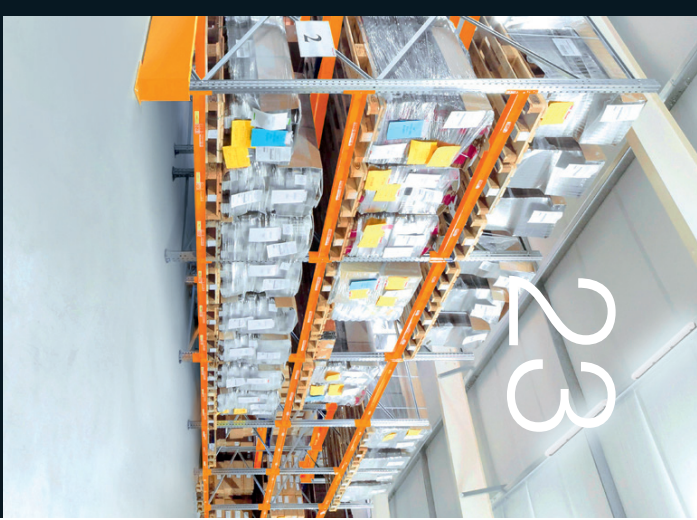

23



Sensor-switched indoor light RS PRO 5850 LED

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 52W giving 5820 lumens, 4000K
- Intelligent swarm function on DALI bus

Group parameterisation

- Optional 10–50% basic light level, slave version available

For EANs, see page 39



Sensor-switched indoor light RS PRO 5100

- T5 sensor-switched LED diffuser luminaire
- 360° high-frequency sensor, 8m reach
- 1 x 54W T5

- IP65 and IK07, also available as a slave version

For EANs, see page 40



Outdoors Sensors

Private home construction

In private home construction, the main reason for using motion detectors is safety and convenience. Whether on the drive or at the front door – lighting needs to come on reliably when people approach the building.

Benefits from STENEL

- STENEL offers sensors with coverage angles of up to 300 degrees for mounting on the wall, ceiling or on the corners of buildings
- Its slim-line and compact design makes the IS 2180 extremely unobtrusive as it reliably watches over outdoor areas over an angle of 180 degrees.
- The sensIQ S is divided into three 100-degree zones, with each zone being separately adjustable in reach

Technical advice

iHF 3-D technology prevents inadvertent triggering from small animals and the detection zone can be precision-adjusted electronically in 3 directions with a reach of 8 m.



Motion detector iHF 3D

- 160° high-frequency sensor
- The perfect, innovative detector for outdoors
- Reach 0.5 – 8m, precision-adjustable in 3 directions
- Detects movement equally well from whichever direction it is approached from
- No inadvertent triggering from small animals
- Also available as a KNX version

For EANs, see page 38



Motion detector IS2180-2

- 180° infrared sensor, 2 pyro sensors
- Compact design fits close to the wall
- Outdoors, areas of up to 200 m²
- Reach up to 12 m

For EANs, see page 38

Outdoors Sensors

Commercial buildings

The outdoor areas around commercial buildings are among the fields in which sensors are most frequently used. This is where it is mainly about security and efficiency in illuminating large areas.

Benefits from STENEL

- The sensIQ can be installed at a height of up to 5 m, either on the wall, on the ceiling or in corners
- The IS 3180 can watch over outdoor areas of up to 500 sqm.
- Besides high-resolution infrared detectors, STENEL is the only manufacturer to offer iHF technology that opens up completely new options in detecting movement outdoors

Technical advice

Whenever possible, install the infrared sensors to point across the walking direction so as to optimise detection performance.



Motion detector IS3180

- 180° infrared motion detector
- Watches over up to 500 m², 20m reach radius
- Wall and corner mounting
- 2 pyro sensors, IP54

For EANs, see page 37



Motion detector sensIQ

- 300° motion detector for outdoors
- Wall, corner & ceiling mounting
- Three 100° zones and sneak-by guard
- Each zone can be mechanically adjusted from 2 – 20m
- Installation at a height of up to 5m, IP54
- Additional wireless, soft-start and potential-free modules

For EANs, see page 37

Outdoors SensorLights

STEINEL offers a wide selection of sensor-switched LED lights for outdoors. Whether for the family home, residential complex or entrances to commercial properties – with this selection, you are bound to find the right light.

Benefits from STEINEL

- SensorLights for outdoors provide convenience, safety and security from innovative infrared sensor technology
- Integrated LED light systems are perfectly matched to the sensors
- An optional basic light level attractively illuminates the house number at night

Technical advice

If required, you can activate 4 hours of permanent lighting operating the switch in the mains power cable.



Sensor-switched outdoor light
L 650 LED

- Sensor-switched outdoor LED light
- Impact-resistant polycarbonate diffuser, IK 07
- 180° infrared sensor, 12m reach
- 8W LED light system, optional basic lighting level, soft start

For EANs, see page 40



Sensor-switched outdoor light
L 691 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 16W LED light system, optional basic light level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 40



Sensor-switched outdoor light
L 680 LED

- Sensor-switched outdoor LED light
- 140° infrared sensor, 12m reach
- 8W LED light system
- Optional basic light level, soft start

For EANs, see page 40



Sensor-switched outdoor light
L 665 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 9W LED light system, separate house number illumination
- Optional basic lighting level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 41



Sensor-switched outdoor light
L 675 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 9W LED light system, separate house number illumination
- Optional basic lighting level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 40



Sensor-switched outdoor light
L 676 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 8W LED light system, separate house number illumination
- Optional basic lighting level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 40



Sensor-switched outdoor light
L 666 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 8W LED light system, separate house number illumination
- Optional basic lighting level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 41



Sensor-switched outdoor light
L 690 LED

- Sensor-switched outdoor LED light
- 360° infrared sensor, 8m reach
- 16W LED light system, optional basic light level, soft start
- Four intelligent basic light-level programmes

For EANs, see page 41



Outdoors Floodlight projectors

Outdoor illumination for advertising purposes is a major field of application for lights. This often involves illuminating signs, company logos or billboards. Normally, this is done using floodlights with halogen bulbs. The drawback: once the bulb reaches the end of its life, it has to be changed at lofty heights, involving a considerable amount of effort.

Benefits from STEINEL

- Thanks to integrated photo-cell controller, advertising can be illuminated at night all automatically with the LED floodlight projector from STEINEL.
- The long-life LED light system keeps power consumption very low.
- Several floodlights can be interconnected by cable to switch ON at the same time.

Technical advice

The floodlight head can be turned through 180° to illuminate areas from above or below.



Floodlight projector **XLED FL-100**

- LED floodlight projector with photo-cell sensor system
 - For billboards and advertising signs
 - 25 W giving 1016 lumens.
 - Colour rendering index RA ≥ 90
 - Arm length 100 cm, as many as 16 floodlights can be interconnected by cable
- For EANs, see page 41

Outdoors Sensor-switched floodlights

Without using motion detectors, illuminating large outdoor areas uses a lot of energy. Only by using motion detectors can lighting be controlled intelligently and activated on demand. Particularly on dives and at the back of buildings, sensor-switched floodlights are a popular choice for installing as a security measure.

Benefits from STEINEL

- With LED floodlights XLED 25 and 10, STEINEL offers two output levels to provide an impressive 4000 and 2000 lumens of light
- These powerful floodlights can brightly illuminate areas of up to 500 square metres with effortless ease
- The floodlights feature a tilly rotating LED panel, 10% basic light level and an active LED cooling system

Technical advice

You can increase the illuminated area by interconnecting these floodlights with slave versions.



Sensor-switched floodlight **XLED 25**

- High-power sensor-switched LED floodlight
 - 240° infrared sensor with 12 m reach
 - 62 W giving 4000 lumens
 - Optional 10% basic light level, slave and wireless version available
- For EANs, see page 41



Sensor-switched floodlight **XLED 10**

- High-power sensor-switched LED floodlight
 - 240° infrared sensor with 12 m reach
 - 30 W giving 2000 lumens
 - Optional 10% basic light level, slave and wireless version available
- For EANs, see page 41

KNX sensors

STENEL detectors provide more functions than other sensors and come with additional HVAC and presence outputs to make the overall system even more efficient. All settings for STENEL sensors are also very easy to change by BUS. In short: opting for STENEL sensors with KNX interface, you are making exactly the right decision in terms of future-proofing a building and ensuring its long-term attractiveness.



Presence detector IR Quattro HD KNX

- 360° infrared presence detector
 - Square detection zone, mechanically scalable
 - Square presence detection zone covering 64m²
 - Ceiling installation at a height of up to 10 m
- For EANs, see page 37



Presence detector IR Quattro KNX

- 360° infrared presence detector
 - Square detection zone, mechanically scalable
 - Square presence detection zone covering 16m², ceiling mounting
- For EANs, see page 36



Presence detector IR Quattro SLIM KNX

- Ultra-slim 360° infrared presence detector
 - Overall height of just 4 mm, ceiling mounting
 - Square presence detection zone covering 16m²
 - Only retina lens of its kind in the world
- For EANs, see page 36



Motion detector sensIQ S KNX

- 300° motion detector for outdoors
 - Wall & corner mounting
 - Three 100° zones and sneak-by guard
 - Each zone can be mechanically adjusted from 2–20 m
 - Installation at a height of up to 5m, IP54
- For EANs, see page 38




Presence detector Dual HF KNX

- High-frequency corridor sensor
 - HF-sensor detects through thin walls and suspended ceilings
 - For corridors, passageways and aisles in residential and office buildings
 - 20 m reach, 10m in each direction
 - Detects everything equally well whichever direction it is approached from
- For EANs, see page 36



Presence detector HF 360 KNX

- 360° high-frequency presence detector
 - HF-sensor detects through thin walls and suspended ceilings
 - 12 m reach in diameter, ceiling mounting
- For EANs, see page 36

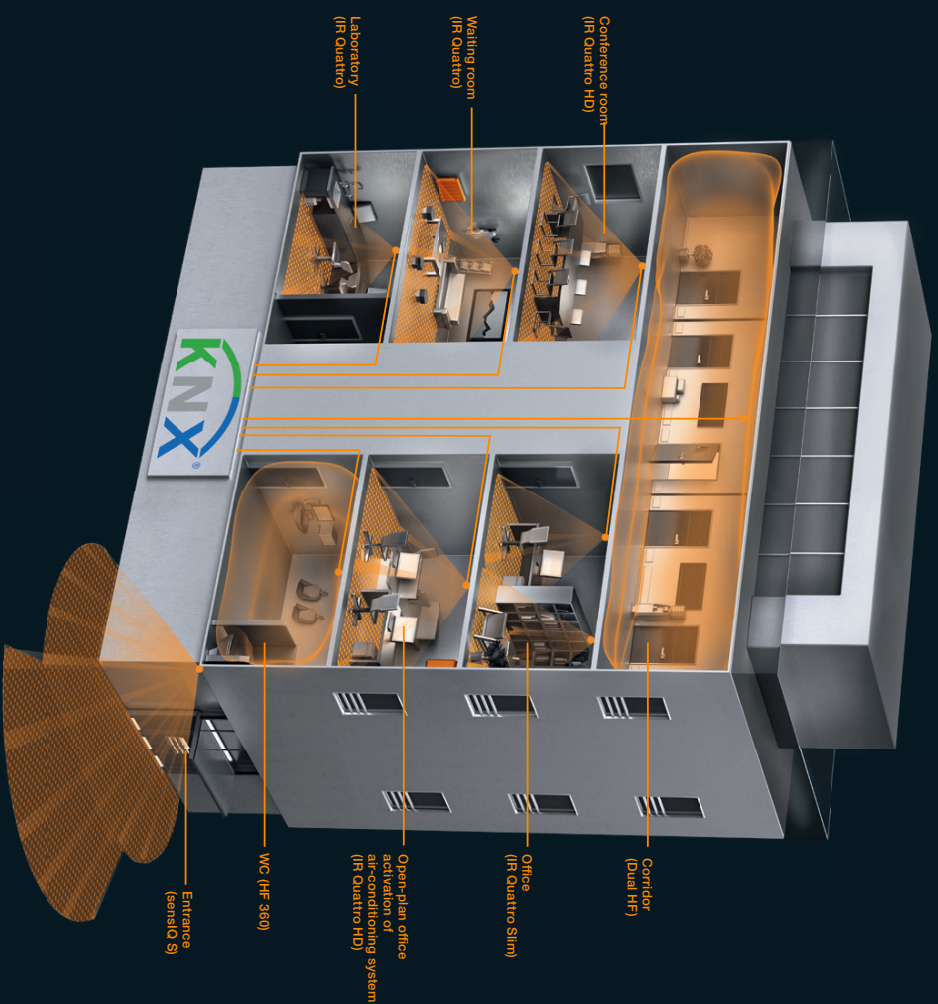

CONTROL
PRO
SYSTEM

sensIQ

- Up to 4 lighting channels
- Basic lighting level function
- Constant-lighting control
- HVAC output
- Additional presence output
- Light level can be exported
- Mains connection (30 V) through KNX BUS voltage setting by ETS.
- remote control or BUS

- 1 lighting channel
- Basic lighting level function and soft start
- Additional presence output
- Close-up range output
- Photo-cell controller output
- Light level can be exported
- Mains connection (30 V) through KNX BUS voltage setting by ETS.
- remote control or BUS

DALI sensors

Constant-lighting control by means of intelligent sensors.

In classrooms or offices, large windows produce different light levels in the room.

To make optimum use of daylight, this means that the lighting control system should respond to the different light situations in the room. With constant lighting control on 2 light channels, the STEINEL DALI presence detectors provide optimum control for light strips in relation to incident daylight. If the daylight component increases, the sensor dims the lighting down. If more light is needed as it gets dark, artificial lighting is turned up to the level required. This provides added convenience while keeping light levels constant, and it also saves energy because artificial lighting is only added when it is really needed. The presence detectors are easily integrated into the lighting system by DALI Broadcast. They can be put into operation by remote control all very conveniently.




Presence detector IR Quattro HD

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 64 m²
- Ceiling installation at a height of up to 10 m

For EANs, see page 37

Constant-lighting control for controlling light the efficient way.

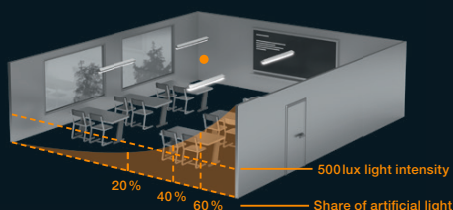

Presence detector IR Quattro

- 360° infrared presence detector
- Square detection zone, mechanically scalable
- Square presence detection zone covering 16 m², ceiling mounting

For EANs, see page 36



Presence detector Dual HF

- High-frequency corridor sensor
- HF-sensor detects through thin walls and suspended ceilings
- For corridors, passageways and aisles in residential and office buildings
- 20m reach, 10m in each direction
- Detects everything equally well whichever direction it is approached from

For EANs, see page 36



Presence detector IR Quattro SLIM

- Ultra-slim 360° infrared presence detector
- Overall height of just 4 mm, ceiling mounting
- Square presence detection zone covering 16 m²
- Only retina lens of its kind in the world

For EANs, see page 36



Presence detector HF360

- 360° high-frequency presence detector
- HF-sensor detects through thin walls and suspended ceilings
- 12m reach in diameter, ceiling mounting

For EANs, see page 36

DALI SensorLights

Dynamic lighting intelligence.



Presenting the RS PRO 5800 LED series, STEINEL provides state-of-the-art waterproof LED diffuser luminaires with swarm intelligence.

Communicating on the DALI bus, swarm technology lets light 'move along' with you.

These luminaires couldn't be easier to install. You can make all settings by remote control for ultimate convenience.

The Remote Group Setting function (group parameterisation) provides the capability of relaying all settings on to the other lights. Any basic light level can be selected and is automatically synchronised among the lights. Protected against strong jets of water and impact-resistant, they are ready for any lighting application.


Intelligent swarm function – light moves along with you.

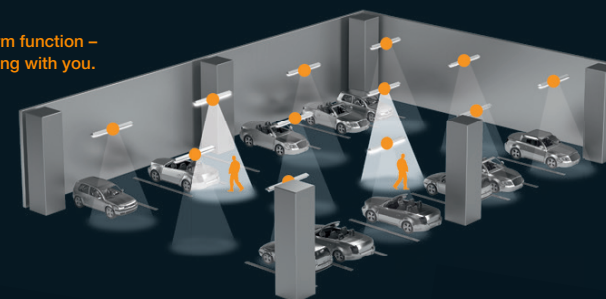

Sensor-switched indoor light RS PRO 5800 LED

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 40W giving 4600 lumens, 4000K
- Intelligent swarm function on DALI bus
- Group parameterisation
- Optional 10–50% basic light level, slave version available

For EANs, see page 39



Sensor-switched indoor light RS PRO 5850 LED

- Sensor-switched LED diffuser luminaire
- For rugged applications: IP66, IK07
- 360° high-frequency sensor, 8m reach
- 52W giving 5820 lumens, 4000K
- Intelligent swarm function on DALI bus
- Group parameterisation
- Optional 10–50% basic light level, slave version available

For EANs, see page 39

Group parameterisation Remote control RC 10

Remote Group Setting function. Set once – automatic transmission to all lights interconnected in a group.

For EANs, see page 39




Spot on rather than rough estimate.
STEINEL PROFESSIONAL
 planning tools.



The PROlog planning tool tells you precisely the amount of energy you can save in a building. For you this means: spot on rather than rough estimate. Overwhelming example calculations and generalisations are often far off the mark, leaving you to think you can save far more than is actually possible. PROlog from STEINEL puts an end to guesswork and calculates exactly how much energy intelligent sensor technology can save for a particular building.

PROlog records user behaviour as well as the level of light in a room and takes this as the basis for calculating the energy / lighting that is being wasted. This way, user behaviour determines the potential saving. Our PROlog and PROlog software gives you a comprehensive instrument to plan your lighting needs. It measures the exact amount of energy being wasted and calculates actual savings for a specific situation.

And the result? An objective basis that perfectly controls the lighting a building actually needs. Simply intelligent.

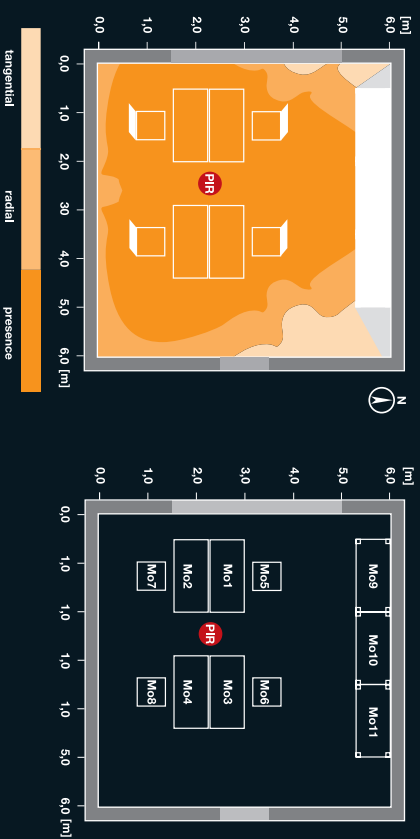

RELUX

Do you want direct access to our comprehensive collection of lighting and sensor data for planning the perfect solution? The software not only provides you with all the data for planning lighting and lights from STEINEL, but also for accurately configuring the detection zone of our sensors - including visual displays.
 Download from www.relux.ch

DIALux

With our vast experience in planning lighting, you can be sure of getting professional results every time. Our expertise combined with free, all-inclusive software gives you a level of efficiency that delivers results you can be proud of. DIALux constantly offers you support with all lighting data and in meeting national and international guidelines, calculates your particular energy requirement and displays your planning results in photo-realistic quality. Having been geared specifically to practical needs, the software has been used by hundreds of thousands of lighting planners across the world.

The light planning and visualisation data are exclusively available to STEINEL Professional clients for on-line plug-in use in DIALux. Light distribution curves, technical specifications and 3D volumetric data are available for downloading from www.dial.de.

Summary of sensors



Dual HF COM 1	EAN 4007841 002978	6
Dual HF KNX	EAN 4007841 008802	6
Dual HF DIM	EAN 4007841 002985	6
Dual HF DALL	EAN 4007841 003005	6



Dual US COM 1	EAN 4007841 007843	6
Dual US COM 2	EAN 4007841 007850	6
Dual US DIM	EAN 4007841 007867	6



IS 345	EAN 4007841 606510	6
--------------	--------------------	---



Single US COM 1	EAN 4007841 007966	6, 8
Single US COM 2	EAN 4007841 007973	6, 8
Single US DIM	EAN 4007841 007980	6, 8



HF 3600	EAN 4007841 733513	8
---------------	--------------------	---



HF 360 COM 1	EAN 4007841 002800	8, 14, 16
HF 360 COM 1 AP	EAN 4007841 751302	8, 14, 16
HF 360 COM 2	EAN 4007841 002848	8, 14, 16
HF 360 KNX	EAN 4007841 008796	8, 14, 16
HF 360 DIM	EAN 4007841 002831	8, 14, 16
HF 360 DALL	EAN 4007841 002817	8, 14, 16



IR Quattro SLIM COM 1	EAN 4007841 593414	10, 13, 16
IR Quattro SLIM COM 2	EAN 4007841 593513	10, 13, 16
IR Quattro SLIM KNX	EAN 4007841 008898	10, 13, 16
IR Quattro SLIM DIM	EAN 4007841 593612	10, 13, 16
IR Quattro SLIM DALL	EAN 4007841 005795	10, 13, 16
IR user remote control RCS	EAN 4007841 592806	
IR service remote control FRC8	EAN 4007841 559410	



IR Quattro COM 1	EAN 4007841 000349	10, 12, 16
IR Quattro COM 1 AP	EAN 4007841 592301	10, 12, 16
IR Quattro COM 2	EAN 4007841 000356	10, 12, 16
IR Quattro KNX	EAN 4007841 008772	10, 12, 16
IR Quattro DIM	EAN 4007841 002718	10, 12, 16
IR Quattro DALL	EAN 4007841 002749	10, 12, 16
IR Quattro Impulser	EAN 4007841 592509	10, 12, 16



US 360 COM 1	EAN 4007841 007935	10, 12, 13, 14, 16, 21
US 360 COM 2	EAN 4007841 007942	10, 12, 13, 14, 16, 21
US 360 DIM	EAN 4007841 007959	10, 12, 13, 14, 16, 21



IR Quattro HD COM 1	EAN 4007841 002794	11, 12, 20, 22
IR Quattro HD COM 1 AP	EAN 4007841 592400	11, 12, 20, 22
IR Quattro HD COM 2	EAN 4007841 002770	11, 12, 20, 22
IR Quattro HD KNX	EAN 4007841 008789	11, 12, 20, 22
IR Quattro HD DIM	EAN 4007841 002787	11, 12, 20, 22
IR Quattro HD DALL	EAN 4007841 002756	11, 12, 20, 22



DualTech COM 1	EAN 4007841 007997	11, 13
DualTech COM 2	EAN 4007841 008000	11, 13
DualTech DIM	EAN 4007841 008017	11, 13



HPD 1	EAN 4007841 593810	12
-------------	--------------------	----



IS D 360	EAN 4007841 601317	14
----------------	--------------------	----



IS 3360	EAN 4007841 606411	18, 21
---------------	--------------------	--------



IS 3180	EAN 4007841 606213	18, 24, 25
---------------	--------------------	------------




sensIQ white	EAN 4007841 600617	18, 25
sensIQ stainless steel	EAN 4007841 600716	18, 25
sensIQ black	EAN 4007841 600518	18, 25




HF 3360	EAN 4007841 753016	18
---------------	--------------------	----

Summary of sensors



IS 345 MX Highbay	EAN 4007841 002725	22
HBS 300 Highbay	EAN 4007841 005610	22
HBS 200 Highbay	EAN 4007841 005827	22
IHF 3D white.....	EAN 4007841 007577	24
IHF 3D black.....	EAN 4007841 007584	24
IHF 3D anthracite	EAN 4007841 007591	24
IHF 3D KNX white.....	EAN 4007841 007607	24
IHF 3D KNX black.....	EAN 4007841 007614	24
IHF 3D KNX anthracite	EAN 4007841 007621	24
IS 2180-2 white.....	EAN 4007841 603816.....	24
IS 2180-2 stainless steel.....	EAN 4007841 603915.....	24
IS 2180-2 black.....	EAN 4007841 603717.....	24
sensIQ S white.....	EAN 4007841 003944.....	24
sensIQ S stainless steel.....	EAN 4007841 003968.....	24
sensIQ S black.....	EAN 4007841 003951.....	24
sensIQ S KNX white.....	EAN 4007841 004064.....	24
sensIQ S KNX stainless steel.....	EAN 4007841 004040.....	24
sensIQ S KNX black.....	EAN 4007841 004057.....	24

Summary of SensorLights

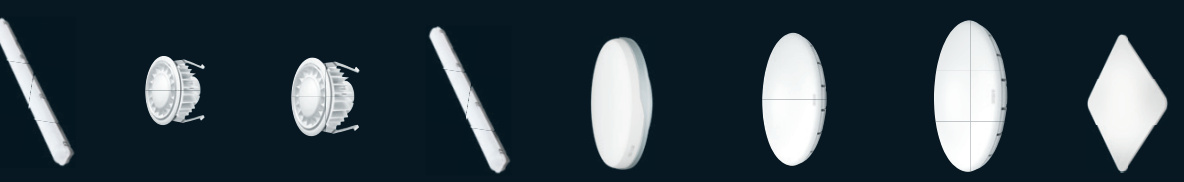

RS PRO LED Q1 WW white	EAN 4007841 007126.....	7, 9
RS PRO LED Q1 WW silver	EAN 4007841 007133.....	7, 9
RS PRO LED Q1 CW white	EAN 4007841 007102.....	7, 9
RS PRO LED Q1 CW silver	EAN 4007841 007119.....	7, 9
RS PRO LED Q1 CW anthracite	EAN 4007841 007645.....	7, 9
RS PRO LED Q1 CW glass	EAN 4007841 007645.....	7, 9
RS PRO LED S2 WW PMMA	EAN 4007841 661816.....	7, 9
RS PRO LED S2 WW polycarbonate	EAN 4007841 661717.....	7, 9
RS PRO LED S2 WW glass	EAN 4007841 661915.....	7, 9
RS PRO LED S2 CW PMMA	EAN 4007841 662110.....	7, 9
RS PRO LED S2 CW polycarbonate	EAN 4007841 662011.....	7, 9
RS PRO LED S2 CW glass	EAN 4007841 662219.....	7, 9
RS PRO LED S1 WW PMMA	EAN 4007841 007072.....	7, 15, 17
RS PRO LED S1 WW polycarbonate	EAN 4007841 007034.....	7, 15, 17
RS PRO LED S1 WW glass	EAN 4007841 006983.....	7, 15, 17
RS PRO LED S1 CW PMMA	EAN 4007841 007058.....	7, 15, 17
RS PRO LED S1 CW polycarbonate	EAN 4007841 007010.....	7, 15, 17
RS PRO LED S1 CW glass	EAN 4007841 006990.....	7, 15, 17
RS PRO LED R1 WW silver	EAN 4007841 007461.....	7, 9, 15, 17
RS PRO LED R1 WW white	EAN 4007841 728212.....	7, 9, 15, 17
RS PRO LED R1 WW anthracite	EAN 4007841 007478.....	7, 9, 15, 17
RS PRO LED R1 CW silver	EAN 4007841 007447.....	7, 9, 15, 17
RS PRO LED R1 CW white	EAN 4007841 728113.....	7, 9, 15, 17
RS PRO LED R1 CW anthracite	EAN 4007841 007454.....	7, 9, 15, 17
RS PRO 5800 LED.....	EAN 4007841 007652.....	9, 17, 19, 21, 23
RS PRO 5800 LED Slave.....	EAN 4007841 007669.....	9, 17, 19, 21, 23
RS PRO DL LED 22 W WW.....	EAN 4007841 007782.....	15
RS PRO DL LED 22 W WW Slave	EAN 4007841 007775.....	15
RS PRO DL LED 22 W CW.....	EAN 4007841 007751.....	15
RS PRO DL LED 22 W CW Slave	EAN 4007841 007768.....	15
RS PRO remote control FC2.....	EAN 4007841 737818.....	15
RS PRO DL LED 15 W WW.....	EAN 4007841 007744.....	15, 17
RS PRO DL LED 15 W WW Slave	EAN 4007841 007737.....	15, 17
RS PRO DL LED 15 W CW.....	EAN 4007841 007713.....	15, 17
RS PRO DL LED 15 W CW Slave	EAN 4007841 007720.....	15, 17
RS PRO remote control FC2.....	EAN 4007841 737818.....	15, 17
RS PRO 5850 LED.....	EAN 4007841 007676.....	19, 23
RS PRO 5850 LED Slave.....	EAN 4007841 007683.....	19, 23
RS PRO remote control FC10.....	EAN 4007841 008925.....	19, 23

Summary of SensorLights



RS PRO 5002 LED EAN 4007841 731915 19, 23
 RS PRO 5002 LED Slave EAN 4007841 733810 19, 23



RS PRO LED S1 IP 65 EAN 4007841 662615 21
 RS PRO LED S1 IP 65 Opal EAN 4007841 007829 21



RS PRO 5100 EAN 4007841 749613 23
 RS PRO 5100 Slave EAN 4007841 749712 23



L 650 LED white EAN 4007841 004033 26
 L 650 LED grey EAN 4007841 004095 26



L 691 LED aluminium-silver-PMMA EAN 4007841 672218 26
 L 691 LED aluminium-anthracite-PMMA EAN 4007841 672317 26
 L 691 LED aluminium-silver-glass EAN 4007841 671716 26
 L 691 LED aluminium-anthracite-glass EAN 4007841 671815 26



L 675 LED aluminium-silver EAN 4007841 003862 26
 L 675 LED aluminium-anthracite EAN 4007841 581817 26



L 676 LED aluminium-silver EAN 4007841 003869 26
 L 676 LED aluminium-anthracite EAN 4007841 581916 26



L 680 LED glass, white EAN 4007841 003821 27
 L 680 LED glass, silver EAN 4007841 003838 27
 L 680 LED stainless steel EAN 4007841 671914 27
 L 680 LED aluminium silver EAN 4007841 003814 27
 L 680 LED aluminium anthracite EAN 4007841 003807 27



L 666 LED aluminium-silver EAN 4007841 003760 27



L 666 LED aluminium-silver EAN 4007841 003777 27



L 690 LED aluminium-silver-PMMA EAN 4007841 672010 27
 L 690 LED aluminium-anthracite-PMMA EAN 4007841 672119 27
 L 690 LED aluminium-silver-glass EAN 4007841 671518 27
 L 690 LED aluminium-anthracite-glass EAN 4007841 671617 27



XL LED FL-100 white EAN 4007841 003890 28
 XL LED FL-100 black EAN 4007841 003906 28



XL LED FL-50 white EAN 4007841 631017 28
 XL LED FL-50 black EAN 4007841 630911 28



XL LED 25 white EAN 4007841 005702 29
 XL LED 25 black EAN 4007841 005696 29
 XL LED-SL 25 white EAN 4007841 005740 29
 XL LED-SL 25 black EAN 4007841 005733 29
 XL LED-FE 25 white EAN 4007841 005788 29
 XL LED-FE 25 black EAN 4007841 005771 29



XL LED 10 white EAN 4007841 005689 29
 XL LED 10 black EAN 4007841 005672 29
 XL LED-SL 10 white EAN 4007841 005726 29
 XL LED-SL 10 black EAN 4007841 005719 29
 XL LED-FE 10 white EAN 4007841 005764 29
 XL LED-FE 10 black EAN 4007841 005757 29



Energy efficiency class:
 The illustrated LED luminaires contain
 LED lamps of energy classes A++ to A.
 The lamps cannot be changed in the luminaire.

Quality and service.

STENNEL®

STENNEL Brand

- STENNEL has been specialising in sensor technology for over 25 years
- German engineering
- Produced in Europe

5 years of warranty are a long time.
Not for our products.

Everything we sell isn't only developed in-house but made by us too. And only in Europe. We also check every STENNEL product for perfect working order before it leaves the factory. This way, we can guarantee the origin, perfect quality and long life of every product we deliver. With this in mind, we send out a signal that's seen nowhere else in the industry: a 5-year functional guarantee on all products from STENNEL Professional.

5 YEARS
WARRANTY



Certified Quality

For us, it goes without saying that all products from STENNEL comply with European safety standards. Despite involving a huge effort and not always easy from a technical point of view, we're never deterred. Because it's all worth it. So you get certified quality – every step of the way.

Needless to say, our management system holds certification under Quality Standard DIN EN ISO 9001 and Environmental Management Systems Standard DIN EN ISO 14001



STENNEL Customer Service

- Phone: +49 (0)5245 448 188
- E-mail: service@stennel.de
- Monday – Friday 8 a.m. – 5 p.m.

www.stennel.de

- Product overview
- Operating instructions for downloading
- Product videos



STENNEL Replacement Parts Service

- Availability guaranteed for genuine STENNEL Parts



Free planning service

- PROLog / DIALux / Relux
- Phone: +49 (0)5245 448 307
- Fax: +49(0)5245 448 308
- E-mail: objekte@stennel.de



STENNEL Academy

- Our own Training Centre in Herzbrock is available to you and your customers
- Phone: +49 (0)5245 448 0
- E-mail: academy@stennel.de



STENNEL near you

- Our own field staff are your direct contacts
- Individually tailored POS modules boost awareness and sales



STEINEL U. K. LTD. 25, Manasty Road - Axis Park Orton Southgate | GB-Peterborough Cambs PE2 6UP | U. K.
Phone +44/1733/366-700 | Fax +44/1733/366-701

www.steinell.de

www.youtube.com/steinellgmbh

www.xing.com/companies/steinellvertriebgmbh

STEINEL®