

ARTEOR WIRING ACCESSORIES

Mechanisms



P. 243
Mechanical switches



P. 250
Lighting control, emergency push-buttons



P. 255
USB chargers



P. 261
Adaptors for data sockets and USB data sockets

Support frames and plates



P. 270
International support frames

Hotel equipment



NEW
P. 280
BUS/SCS devices

NEW PRODUCTS 2014



Universal dimmers
(p. 247)



Hotel equipment
BUS/SCS wiring accessories
(p. 280)



P. 245
Electronic switches



P. 246
Push-buttons



NEW
P. 247
Dimmers



P. 249
Automatic switches and visual indication



P. 250
DP switches, cooker control units



P. 251
Ventilation, heating and roller blinds control RCBO and MCB



P. 252
British standard socket outlets



P. 253
International socket outlets



P. 257
Television and telephone sockets



P. 258
RJ 45 sockets and data sockets



P. 259
Data sockets, wiring splitter and Ethernet switches



P. 260
Wi-Fi access points



P. 262
Attenuators and loudspeaker sockets



P. 262
Cords and Cables



P. 265
Audio and video sockets



P. 268
Blanking plates and mounting boxes



P. 271
British standard plates




P. 273
Italian/US standard plates



P. 275
American and South African standard plates



P. 272
German and French standard plates






































P. 282
Wiring devices





















P. 283
Square version mechanisms



P. 284
Round version mechanisms















Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium	Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium
SWITCHES 10 AX - 250 V~				SENSITIVE SWITCH 100/240 V~			
	1-way switch	5 720 04	5 725 04		For controlling light sources by simply passing the hand in front of the switch	5 720 51	5 734 55
	2-way switch	5 720 05	5 725 05				
	Intermediate switch	5 720 08	5 725 08				
	1-way switch	5 724 50		PUSH-BUTTONS 6 A - 250 V~			
	2-way switch with indicator To be equipped with LED	5 720 06	5 725 06		1-way push-button	5 720 00	5 725 00
	1-way switch	5 720 34	5 725 34		2-way push-button	5 720 01	5 725 01
	2-way switch	5 720 35	5 725 35		1-way push-button with bell symbol	5 720 15	5 725 15
	Intermediate switch	5 720 38	5 725 38				
	2-way switch with indicator To be equipped with LED	5 720 36	5 725 36		2-way push-button with locator Equipped with blue LED	5 720 02	5 725 02
	2-way switch with indicator and label-holder To be equipped with LED	5 720 37	5 725 37				
	Double pole switch	5 720 40	5 725 40		2-way push-button with label-holder	5 720 03	5 725 03
SWITCHES 20 AX - 250 V~					Push-button with locator and bell symbol Equipped with blue LED	5 720 16	5 725 16
	1-way switch	5 720 09	5 725 09				
	2-way switch	5 720 10	5 725 10		1-way push-button	5 720 30	5 725 30
	2-way switch with indicator To be equipped with LED	5 720 11	5 725 11		2-way push-button	5 720 31	5 725 31
	1-way - double pole switch	5 720 13	5 725 13		1-way push-button with bell symbol	5 720 56	5 725 56
	Double pole switch	5 724 51					
	1-way - double pole switch with indicator - Red LED supplied	5 720 14	5 725 14		2-way push-button with locator Equipped with blue LED	5 720 32	5 725 32
	1-way switch	5 720 41	5 725 41				
	1-way switch - 3 gang	5 720 43	5 725 43		2-way push-button with label-holder	5 720 33	5 725 33
	2 x 2-way switch + 1-way switch	5 720 44	5 725 44	DIMMERS 100/240 V~ - 50/60 Hz			
	3 gang	5 720 42	5 725 42		Leading edge dimmer Without neutral - 400 W	5 722 13	5 727 13
	2-way switch with indicator To be equipped with LED	5 720 46	5 725 46		Rotary dimmer		
	1-way - Double pole switch	5 720 48	5 725 48		Universal dimmer Without neutral - 400 W	5 722 39	5 727 39
	2-way - Double pole switch	5 720 47	5 725 47				
	1-way - double pole switch with indicator - Red LED supplied	5 720 49	5 725 49				
	1-way - double pole switch with indicator and "WATER HEATER" marking - Red LED supplied						



















Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium	Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium
DOUBLE POLE SWITCHES 250 V\sim				VISUAL INDICATION			
	DP switch 40 A DP switch 40 A + neon	5 720 81 5 720 82	5 725 81 5 725 82		Miniature emergency lighting unit	5 722 22	-
	DP switch 45 A + neon 2 gang	5 720 80	5 725 80		Illuminated lighting unit	5 724 52	-
	DP switch 45 A + neon 1 gang	5 720 87	5 725 87		Overdoor lighting unit - red diffuser - white diffuser	5 724 53 5 722 23	- -
COOKER CONTROL UNIT				VENTILATION AND HEATING CONTROLLER			
	45 A DP switch	5 720 88	-		Fan controller - AC speed control 4 positions	5 722 17	5 727 17
LIGHTING CONTROL					Rotary speed controller for fan 40 to 400 VA	5 722 18	5 727 18
	Time delay switch	5 720 55	5 740 84		Fan step regulator - 100 W	5 722 15	5 727 15
	Single pole latching relay	5 722 27	5 727 27		Electronic room thermostat	5 722 03	5 727 03
EMERGENCY STOP MUSHROOM HEAD PUSH-BUTTONS					Thermostat for electronic floor heating	5 722 63	5 727 63
	Emergency stop mushroom head with key	5 723 63	-	ROLLER BLINDS CONTROL			
	Emergency stop mushroom head 1/4 turn	5 723 62	-		Double push-button - 10 A	5 722 19	5 727 19
					Double switch - 10 A	5 722 20	5 727 20



















Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium	Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		○ White	● Magnesium
BRITISH STANDARD SOCKET OUTLETS				FUSED CONNECTION UNITS			
	2P+E - 5 A	5 721 10	5 726 10		DP fused 13 A switched switched + neon	5 721 50 5 721 51	5 726 50 5 726 51
	2P+E - 13 A	5 721 11	5 726 11	GERMAN STANDARD SOCKET OUTLETS			
	2P+E switched - 13 A	5 721 30	5 726 30		2P+E - 16 A	5 721 18	5 726 18
	2P+E switched dedicated non standard pin - 13 A	5 724 67			2P+E - 16 A - dedicated red	5 724 63	
	2P+E switched - 15 A	5 721 32	5 726 32		2P+E - 16 A - dedicated green	5 724 62	
	2P+E single pole socket 13 A - 1 gang switched switched + neon	5 721 43 5 721 44	5 726 43 5 726 44		2P+E - 16 A - dedicated orange	5 724 60	
	2P+E single pole socket 13 A - 2 gang switched switched + neon	5 721 45 5 721 46	5 726 45 5 726 46		2P+E with cover - 16 A	5 721 19	5 726 19
	2P+E double pole switched socket 5 A - 1 gang	5 721 40	5 726 40	EURO-US TYPE SOCKET OUTLETS			
	2P+E double pole switched socket 13 A - 1 gang	5 721 47	5 726 47		2P	5 721 04	5 726 04
	2P+E double pole switched socket 13 A - 2 gang	5 721 49	5 726 49		2P+E	5 721 16	5 726 16
	2P+E double pole switched socket 13 A - 2 gang switched for standard and clean earth applications	5 721 41			2 x 2P+E	5 721 33	5 726 33






















Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)				Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)			
		White	Magnesium			White	Magnesium
AMERICAN TYPE SOCKET OUTLETS				AUSTRALIAN TYPE SOCKET OUTLETS			
	2P	5 721 05	5 726 05		2P+E auto switched - 10 A	5 721 14	5 726 14
	2P+E	5 721 17	5 726 17		2P+E - 10/15 A	5 721 12	5 726 12
	2 x 2P+E	5 721 34	5 726 34	ISRAEL TYPE SOCKET OUTLETS			
SOUTH AFRICAN TYPE SOCKET OUTLETS					2P+E shuttered for child safety	5 721 24	5 726 24
	2P+E switched	5 721 32	5 726 32	CHINA TYPE SOCKET OUTLETS			
	2P+E dedicated switched	5 724 65			2P+E - 10 A 2P+E - 16 A	5 721 13 5 721 21	5 726 13 5 726 21
	2 x 2P+E switched - 2 gang - pre-wired	5 720 22	5 725 22		2P+E China + 2P Euro-US - 10 A	5 721 31	5 726 31
MULTISTANDARD SOCKET OUTLETS				ELV SOCKET OUTLETS			
	Unswitched	5 721 23	5 726 23		2P - 3A	5 721 00	5 726 00
	Switched	5 721 35	5 726 35	FRENCH STANDARD SOCKET OUTLETS			
ITALIAN TYPE SOCKET OUTLETS					2P shuttered for child safety - 10/16 A	5 720 20	5 725 20
	2P+E on line - 10 A	5 721 01	5 726 01		2P+E shuttered for child safety - 10/16 A	5 720 21	5 725 21
	2P+E shuttered for child safety 10/16 A	5 721 03	5 726 03		2P+E tamperproof	5 724 66	
SWISS TYPE SOCKET OUTLETS					Tamperproof insert	0 502 99	
	2P+E - 10/16 A - type 12	5 721 02	-				
	2P+E - 10 A - type 13	5 721 15	-				

Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)				Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)			
		White	Magnesium			White	Magnesium
RJ 45 SOCKETS - CAT. 6A				RJ 45 SOCKETS - CAT. 6 (continued)			
	STP	5 723 06	5 728 06		FTP	5 723 22	5 728 22
	STP - with green shutter	5 723 52	5 728 52		FTP	5 723 16	5 728 16
	STP - with orange shutter	5 723 51	5 728 51	RJ 45 SOCKETS - CAT. 5E			
	STP - with controlled access	5 723 50	5 728 50		UTP	5 723 03	5 728 03
	UTP	5 723 49	5 728 49		UTP	5 723 15	5 728 15
	UTP - with green shutter	5 723 59	5 728 59		FTP	5 723 04	5 728 04
	UTP - with orange shutter	5 723 58	5 728 58	REAR PLUGGABLE RJ 45 SOCKETS			
	UTP - with controlled access	5 723 57	5 728 57		Cat. 6 - UTP Cat. 6 - FTP	5 723 31 5 723 33	5 728 31 5 728 33
RJ 45 SOCKETS - CAT. 6					Cat. 5e - UTP Cat. 5e - FTP	5 723 30 5 723 32	5 728 30 5 728 32
	STP shielded	5 723 23	5 728 23	TELEPHONE/ETHERNET WIRING SPLITTERS			
	STP shielded	5 723 17	5 728 17		FTP double connector	5 723 36	5 728 36
	UTP	5 723 02	5 728 02		UTP double connector	5 723 35	5 728 35
	UTP - with green shutter	5 723 55	5 728 55	TELEVISION SOCKETS			
	UTP - with orange shutter	5 723 54	5 728 54		TV-R-SAT socket	5 721 72	5 726 72
	UTP	5 723 14	5 728 14		TV-R socket	5 721 70	5 726 70
	UTP - with controlled access	5 723 53	5 728 53		TV single shielded male \varnothing 9.5 mm	5 721 71	5 726 71
	UTP retractable RJ 45	5 723 39	5 728 39		TV single shielded "F" type	5 721 63	5 726 63

Mechanisms supplied with white or magnesium square rocker plate, to be equipped with support frames and plates (p. 241)		 White	 Magnesium
TELEPHONE SOCKETS			
	RJ 11 - 4 contacts	5 723 00	5 728 00
	RJ 11 - 4 contacts	5 723 13	5 728 13
	RJ 12 - 6 contacts	5 723 12	5 728 12
	Single master	5 723 10	5 728 10
	Single secondary	5 723 01	5 728 01
BLANK MODULES			
	1 module	5 723 41	5 728 41
	2 modules	5 723 42	5 728 42
	3 modules	5 723 43	5 728 43
CABLE OUTLETS			
	20 A - for junction	5 723 20	-
	45 A - BS 1 gang	5 723 21	-
CORD OUTLETS			
	1 module - with Ø8 mm entry	5 723 07	-
	2 modules	5 723 19	-

BLANKING COVER PLATES		 White	 Magnesium
BRITISH STANDARD			
	For 1 gang box  White  Pearl Alu  Graphite	5 751 30	5 751 31 5 751 32
	For 2 gang box  White  Pearl Alu  Graphite	5 751 40	5 751 41 5 751 42
ITALIAN/US STANDARD			
	For 2" x 4" boxes  White  Pearl Alu  Graphite	5 754 10	5 754 11 5 754 12
US STANDARD			
	For 4" x 4" boxes  White  Pearl Alu  Graphite	5 753 60	5 753 61 5 753 62

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES			
				White	Neutral	Graphite	Tattoo
							
BRITISH STANDARD - 60.3 MM FIXING CENTRES							
1 module	1 gang	5 760 03		5 752 00	5 752 01	5 752 02	5 761 08
2 modules and 1.2" touch screen		5 760 03		5 752 10	5 752 11	5 752 12	5 761 28
3 modules - 1 gang	1 gang	5 760 01		5 751 60	5 751 61	5 751 62	5 761 88
3 modules and shaver sockets	2 gang	5 760 02		5 750 70	5 750 71	5 750 72	5 761 68
4 modules	2 gang	5 760 00		5 750 80	5 750 81	5 750 82	5 761 48
6 modules	6 890 36	Supplied with support frame		5 753 70	5 753 71	5 753 72	5 763 78
8 modules	6 890 38	Supplied with support frame		5 767 00	5 767 01	5 767 02	5 767 18
2 x 6 modules	6 890 28	Supplied with support frame		5 753 90	5 753 91	5 753 92	-
3 x 6 modules	0 818 56	Supplied with support frame		5 754 00	5 754 01	5 754 02	-
For 5 A/13 A switched socket outlet - 1 gang	-	Not needed		5 750 90	5 750 91	5 750 92	5 762 18
For 13 A twin Switched socket outlet - 2 gang	-	Not needed		5 751 00	5 751 01	5 751 02	5 762 08
For 13 A fused connection unit switched	-	Not needed		5 751 20	5 751 21	5 751 22	5 761 98
For cooker unit Cat.No 5 720 88	-	Not needed		5 751 50	-	-	-
Blanking cover plate	1 gang	5 760 03 5 760 01		5 751 30	5 751 31	5 751 32	-
	2 gang	5 760 02		5 751 40	5 751 41	5 751 42	-
ITALIAN OR US STANDARDS - 83.5 MM FIXING CENTRES							
1 module	0 800 49	5 760 40		5 752 20	5 752 21	5 752 22	5 764 18
2 modules and 1.2" touch screen	0 800 49	5 760 40		5 752 30	5 752 31	5 752 32	5 764 38
3 modules	0 800 49	5 760 40		5 750 10	5 750 11	5 750 12	5 764 58
4 modules	0 800 42	5 760 11		5 750 30	5 750 31	5 750 32	5 762 78
6 modules	0 800 43	5 760 12		5 750 40	5 750 41	5 750 42	5 762 88
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 754 11	5 754 12	-

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES			
				White	Neutral	Graphite	Tattoo
							
AMERICAN STANDARD - 83.5 MM FIXING CENTRES (SOUTH AFRICAN STANDARD p. 390)							
1 module	2" x 4"	5 760 40		5 752 40	5 752 41	5 752 42	5 764 18
2 modules and 1.2" touch screen		5 760 40		5 752 50	5 752 51	5 752 52	5 764 38
3 modules		5 760 40		5 752 70	5 752 71	5 752 72	5 764 58
2 modules	4" x 4"	5 760 31		5 752 60	5 752 61	5 752 62	5 766 28
3 modules		5 760 31		5 752 80	5 752 81	5 752 82	5 766 48
4 modules		5 760 31		5 752 90	5 752 91	5 752 92	5 766 58
2 x 3 modules		5 760 32		5 753 00	5 753 01	5 753 02	5 766 78
Blanking cover plates	2" x 4"	5 760 40		5 754 10	5 754 11	5 754 12	-
	4" x 4"	5 760 31		5 753 60	5 753 61	5 753 62	-
FRENCH AND GERMAN STANDARD - 60 MM FIXING CENTRES							
1 module	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 40	5 765 41	5 765 52	5 762 28
2 modules and 1.2" touch screen	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 60	5 765 61	5 765 62	5 762 48
3 modules	0 800 49	5 760 40		5 750 10	5 750 11	5 750 12	5 764 58
4 modules	0 800 42	5 760 11		5 750 30	5 750 31	5 750 32	5 762 78
2 x 2 modules	0 800 42	2 x 5 760 21		5 750 20	5 750 21	5 750 22	5 762 68
6 modules	0 800 43	5 760 12		5 750 40	5 750 41	5 750 42	5 762 88
2 x 6 modules	0 801 26	5 760 22		5 750 60	5 750 61	5 750 62	-
3 x 2 modules	0 800 43	3 x 5 760 21		5 750 50	5 750 51	5 750 52	-

Arteor™ mechanical switches

square version



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)


Pack	Cat.Nos	Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~ (continued)
10	5 720 04	1-way switch ○ White - 1 module	10	5 720 11	2-way switch with indicator To be equipped with LED (p. 249) ○ White - 1 module
10	5 725 04	● Magnesium - 1 module	5	5 725 11	● Magnesium - 1 module
10	5 724 50	● Red - 1 module	10	5 720 42	○ White - 2 modules
10	5 720 34	○ White - 2 modules	5	5 725 42	● Magnesium - 2 modules
10	5 725 34	● Magnesium - 2 modules	10	5 720 43	1-way switch - 3 gang ○ White - 2 modules
10	5 720 05	2-way switch ○ White - 1 module	10	5 725 43	● Magnesium - 2 modules
10	5 725 05	● Magnesium - 1 module	10	5 720 44	2 x 2-way switch + 1-way switch - 3 gang ○ White - 2 modules
10	5 720 35	○ White - 2 modules	10	5 725 44	● Magnesium - 2 modules
10	5 725 35	● Magnesium - 2 modules	10	5 720 46	1-way double pole switch ○ White - 1 module
10	5 720 06	2-way switch with indicator To be equipped with LED (p. 249) ○ White - 1 module	5	5 720 13	○ White - 1 module
10	5 725 06	● Magnesium - 1 module	5	5 725 13	● Magnesium - 1 module
5	5 720 36	○ White - 2 modules	5	5 724 51	● Red - 1 module
5	5 725 36	● Magnesium - 2 modules	10	5 720 46	○ White - 2 modules
5	5 720 37	2-way switch with indicator and label-holder To be equipped with LED (p. 249) ○ White - 2 modules	10	5 725 46	● Magnesium - 2 modules
5	5 725 37	● Magnesium - 2 modules	5	5 720 14	1-way double pole switch with indicator Red LED supplied ○ White - 1 module
5	5 720 08	Intermediate switch ○ White - 1 module	5	5 725 14	● Magnesium - 1 module
5	5 725 08	● Magnesium - 1 module	10	5 720 47	○ White - 2 modules
10	5 720 38	○ White - 2 modules	10	5 725 47	● Magnesium - 2 modules
10	5 725 38	● Magnesium - 2 modules	10	5 720 49	1-way double pole switch with indicator and "WATER HEATER" marking Red LED supplied ○ White - 2 modules
10	5 720 40	Double pole switch ○ White - 2 modules	10	5 725 49	● Magnesium - 2 modules
5	5 725 40	● Magnesium - 2 modules	10	5 720 48	2-way double pole switch ○ White - 2 modules
10	5 720 09	1-way switch ○ White - 1 module	10	5 725 48	● Magnesium - 2 modules
10	5 725 09	● Magnesium - 1 module			
10	5 720 41	○ White - 2 modules			
10	5 725 41	● Magnesium - 2 modules			
10	5 720 10	2-way switch ○ White - 1 module			
10	5 725 10	● Magnesium - 1 module			

Support frames and plates, **p. 270-278**



Arteor™ mechanical switches

round version

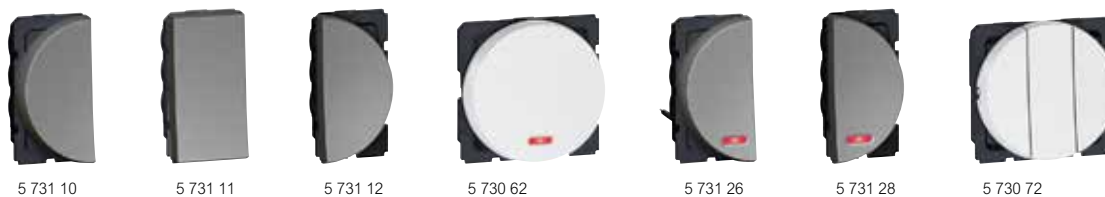

5 731 10

5 731 11

5 731 12

5 730 62

5 731 26

5 731 28

5 730 72

Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~ (continued)
10	5 730 10	1-way switch ○ White - 1 left module	10	5 730 23	2-way switch ○ White - 1 left module
10	5 731 10	● Magnesium - 1 left module	10	5 731 23	● Magnesium - 1 left module
10	5 730 11	○ White - 1 middle module	10	5 730 24	○ White - 1 middle module
10	5 731 11	● Magnesium - 1 middle module	10	5 731 24	● Magnesium - 1 middle module
10	5 730 12	○ White - 1 right module	10	5 730 25	○ White - 1 right module
10	5 731 12	● Magnesium - 1 right module	10	5 731 25	● Magnesium - 1 right module
10	5 730 60	○ White - 2 modules	2-way switch with indicator To be equipped with LED (p. 249)		
10	5 731 60	● Magnesium - 2 modules	5	5 730 26	○ White - 1 left module
10	5 730 13	2-way switch ○ White - 1 left module	5	5 731 26	● Magnesium - 1 left module
10	5 731 13	● Magnesium - 1 left module	5	5 730 28	○ White - 1 right module
10	5 730 14	○ White - 1 middle module	5	5 731 28	● Magnesium - 1 right module
10	5 731 14	● Magnesium - 1 middle module	5	5 730 71	○ White - 2 modules
10	5 730 15	○ White - 1 right module	5	5 731 71	● Magnesium - 2 modules
10	5 731 15	● Magnesium - 1 right module	1-way switch - 3 gang		
10	5 730 61	○ White - 2 modules	10	5 730 72	○ White - 2 modules
10	5 731 61	● Magnesium - 2 modules	5	5 731 72	● Magnesium - 2 modules
5	5 730 16	2-way switch with indicator To be equipped with LED (p. 249)	2 x 2-way switch + 1-way switch - 3 gang		
5	5 731 16	○ White - 1 left module	10	5 730 73	○ White - 2 modules
5	5 730 17	○ White - 1 middle module	10	5 731 73	● Magnesium - 2 modules
5	5 731 17	● Magnesium - 1 middle module	1-way double pole switch		
5	5 730 18	○ White - 1 right module	5	5 730 30	○ White - 1 left module
5	5 731 18	● Magnesium - 1 right module	5	5 731 30	● Magnesium - 1 left module
5	5 730 62	○ White - 2 modules	5	5 730 31	○ White - 1 right module
5	5 731 62	● Magnesium - 2 modules	5	5 731 31	● Magnesium - 1 right module
10	5 730 63	Intermediate switch ○ White - 2 modules	10	5 730 75	○ White - 2 modules
5	5 731 63	● Magnesium - 2 modules	10	5 731 75	● Magnesium - 2 modules
5	5 730 65	Double pole switch ○ White - 2 modules	1-way double pole switch with indicator Red LED supplied		
5	5 731 65	● Magnesium - 2 modules	5	5 730 32	○ White - 1 left module
			5	5 731 32	● Magnesium - 1 left module
			5	5 730 33	○ White - 1 right module
			5	5 731 33	● Magnesium - 1 right module
			10	5 730 76	○ White - 2 modules
			10	5 731 76	● Magnesium - 2 modules
			1-way double pole switch with indicator and "WATER HEATER" marking Red LED supplied		
10	5 730 20	1-way switch ○ White - 1 left module	10	5 730 78	○ White - 2 modules
10	5 731 20	● Magnesium - 1 left module	10	5 731 78	● Magnesium - 2 modules
10	5 730 21	○ White - 1 middle module	2-way double pole switch		
10	5 731 21	● Magnesium - 1 middle module	10	5 730 77	○ White - 2 modules
10	5 730 22	○ White - 1 right module	5	5 731 77	● Magnesium - 2 modules
10	5 731 22	● Magnesium - 1 right module			
10	5 730 70	○ White - 2 modules			
10	5 731 70	● Magnesium - 2 modules			

Arteor™ electronic switches

square version



Support frame and plate selection charts **p. 271-278**
Load selection charts **p. 248**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack Cat.Nos Micropush switches without neutral - 100/240 V~

Pack	Cat.Nos	2-way switch - 400 W
1	5 740 04	○ White - 2 modules
1	5 740 54	● Magnesium - 2 modules
2-way switch - 2 x 400 W with LED locator With magnesium control touch Supplied with support frame		
1	5 740 02	○ White - 2 modules
1	5 740 52	● Black - 2 modules

Pack Cat.Nos Micropush switches with neutral - 100/240 V~

Pack	Cat.Nos	2-way switch - 1000 W with LED locator
1	5 740 03	○ White - 2 modules
1	5 740 53	● Black - 2 modules
2-way switch - 2 x 1000 W with LED locator		
1	5 740 00	○ White - 2 modules
1	5 740 50	● Black - 2 modules
2-way switch - 3 x 1000 W with LED locator		
1	5 740 01	○ White - 2 modules
1	5 740 51	● Black - 2 modules

Pack Cat.Nos Sensitive switches - 100/240 V~

Pack	Cat.Nos	Sensitive switches - 100/240 V~
1	5 720 51	○ White - 2 modules
1	5 734 55	● Magnesium - 2 modules

For controlling light sources by simply passing the hand in front of the switch (distance 5 mm)
Up to 5 sensitive switches can be combined to control the same lighting circuit
Supplied with LED indicator light

Arteor™ electronic switches

round version



Support frame and plate selection charts **p. 271-278**
Load selection charts **p. 248**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack Cat.Nos Micropush switches without neutral - 100/240 V~

Pack	Cat.Nos	2-way switch - 400 W
1	5 743 04	○ White - 2 modules
1	5 743 54	● Magnesium - 2 modules
2-way switch - 2 x 400 W with LED locator With magnesium circle for control Supplied with support frame		
1	5 743 02	○ White - 2 modules
1	5 743 52	● Black - 2 modules

Pack Cat.Nos Micropush switches with neutral - 100/240 V~

Pack	Cat.Nos	2-way switch - 1000 W with LED locator
1	5 743 03	○ White - 2 modules
1	5 743 53	● Black - 2 modules
2-way switch - 2 x 1000 W with LED locator		
1	5 743 00	○ White - 2 modules
1	5 743 50	● Black - 2 modules
2-way switch - 3 x 1000 W with LED locator		
1	5 743 01	○ White - 2 modules
1	5 743 51	● Black - 2 modules

Pack Cat.Nos Sensitive switches - 100/240 V~

Pack	Cat.Nos	Sensitive switches - 100/240 V~
1	5 725 51	○ White - 2 modules
1	5 736 55	● Magnesium - 2 modules

For controlling light sources by simply passing the hand in front of the switch (distance 5 mm)
Up to 5 sensitive switches can be combined to control the same lighting circuit
Supplied with LED indicator light

Arteor™ push-buttons

square version



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	5 720 00	1-way push-button ○ White - 1 module
10	5 725 00	● Magnesium - 1 module
10	5 720 30	○ White - 2 modules
10	5 725 30	● Magnesium - 2 modules
5	5 720 15	1-way push-button with bell symbol ○ White - 1 module
5	5 725 15	● Magnesium - 1 module
5	5 720 56	○ White - 2 modules
5	5 725 56	● Magnesium - 2 modules
5	5 720 16	1-way push-button with locator and bell symbol Equipped with blue LED ○ White - 1 module
5	5 725 16	● Magnesium - 1 module
10	5 720 01	2-way push-button ○ White - 1 module
5	5 725 01	● Magnesium - 1 module
10	5 720 31	○ White - 2 modules
5	5 725 31	● Magnesium - 2 modules
10	5 720 02	2-way push-button with locator Equipped with blue LED ○ White - 1 module
10	5 725 02	● Magnesium - 1 module
10	5 720 32	○ White - 2 modules
5	5 725 32	● Magnesium - 2 modules
10	5 720 03	2-way push-button with label-holder ○ White - 1 module
5	5 725 03	● Magnesium - 1 module
10	5 720 33	○ White - 2 modules
10	5 725 33	● Magnesium - 2 modules

Arteor™ push-buttons

round version



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	5 730 00	1-way push-button ○ White - 1 left module
10	5 731 00	● Magnesium - 1 left module
10	5 730 01	○ White - 1 middle module
10	5 731 01	● Magnesium - 1 middle module
10	5 730 02	○ White - 1 right module
10	5 731 02	● Magnesium - 1 right module
10	5 730 50	○ White - 2 modules
10	5 731 50	● Magnesium - 2 modules
5	5 730 80	1-way push-button with bell symbol ○ White - 2 modules
5	5 731 80	● Magnesium - 2 modules
5	5 730 51	2-way push-button ○ White - 2 modules
5	5 731 51	● Magnesium - 2 modules
5	5 730 52	2-way push-button with locator Equipped with blue LED ○ White - 2 modules
5	5 731 52	● Magnesium - 2 modules
10	5 730 53	2-way push-button with label-holder ○ White - 2 modules
5	5 731 53	● Magnesium - 2 modules

Arteor™ dimmers







square version






Support frame and plate selection charts **p. 271-278**
Load selection charts **p. 248**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)
100/240 VA - 50/60 Hz

Pack Cat.Nos Resistive/inductive loads touch dimmers

1	5 722 11	<p>Without neutral, 2-wire</p> <p>Push-button dimmer - 600 W</p> <p>To be installed alone in a 3 module box with a 3-module support frame and a 2-module plate</p> <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 727 11	
1	5 722 13	<p>Leading edge dimmers</p> <p>Without neutral, 2-wire</p> <p>Rotary dimmer - 400 W</p> <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 727 13	
1	5 735 01	<p>Rotary dimmer - 1000 W</p> <p>To be installed alone in a 3 module box (or 1 gang BS) with a 3-module support frame and a 2-module plate</p> <p>For lamps:</p> <ul style="list-style-type: none"> - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-1000 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 737 01	
1	N 5 722 38	<p>Dimmers 0-10 V</p> <p>Push-button dimmer for ballasts 0-10 V</p> <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 727 38	
1	5 740 07	<p>Trailing/leading edge dimmers</p> <p>Push-button dimmer - 2 x 400 W</p> <p>With Magnesium control touch</p> <p>Supplied with support frame</p> <p>○ White - 2 modules</p> <p>● Black - 2 modules</p> 
1	5 740 57	
1	5 740 06	<p>Push-button dimmer - 600 W</p> <p>To be installed alone in a 3 module box with a 3-module support frame and a 2-module plate</p> <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 740 56	

Pack Cat.Nos Trailing/leading edge dimmers (continued)

1	5 722 41 ¹	<p>Push-button dimmer - 1000 W</p> <p>Supplied complete with flush-mounting box, support frame and plate. 5 LEDs showing lighting intensity status</p> <p>○ White - 5 vertical modules</p> <p>● Magnesium - 5 vertical modules</p> 
1	5 727 41 ²	
1	N 5 722 39	<p>Universal dimmers</p> <p>Without neutral, 2 wires</p> <p>Push-button dimmer for all types of lamps:</p> <ul style="list-style-type: none"> - Dimmable LEDs: 75 W - Dimmable compact fluorescent lamps: 75 W - Halogen with transformer: 400 VA - Fluorescent tube: 200 VA - Halogen 230 V and incandescent: 400 W <p>Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control</p> <p>Lights come on again at the same lighting level as before they were last switched off</p> <p>○ White - 2 modules</p> <p>● Magnesium - 2 modules</p> 
1	5 727 39	
1	5 740 10 ¹	<p>Lighting environment controller</p> <p>Main controller 3 x 1000 W (the cumulative load of the 3 circuits must not exceed 2200 W)</p> <p>Supplied complete with flush-mounting box, support frame and plate</p> <p>Particularly suitable for controlling lighting environments in conference rooms, meeting rooms, restaurants, showrooms, etc.</p> <p>Possible applications:</p> <ul style="list-style-type: none"> - control of 3 lighting circuits in one room - control of lighting environments by dimming polychromatic lamps (red/green/blue or warm/white/cold white) <p>Controls on front face:</p> <ul style="list-style-type: none"> - 6 push-buttons for on/off/dimming control of each of the 3 lighting circuits - 3 sets of 5 LEDs displaying the current level of each circuit - 4 push-buttons for memorisation and control of lighting environments <p>○ White</p> <p>● Magnesium</p> 
1	5 740 60 ²	

1: Supplied with White plate
2: Supplied with Mirror Black plate

Arteor™ dimmers

round version



5 743 55



5 743 19



5 743 38

Support frame and plate selection charts **p. 271-278**
Load selection charts (**see opposite**)

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)
100/240 VA - 50/60 Hz

Pack Cat.Nos Resistive/inductive loads touch dimmers

Without neutral, 2-wire
Push-button dimmer - 600 W
To be installed alone in a 3 module box with a 3-module support frame and a 2-module plate
For lamps:
○ White - 2 modules
● Magnesium - 2 modules

1	5 743 05	
1	5 743 55	

Leading edge dimmers

Without neutral, 2-wire
Rotary dimmer - 1000 W
To be installed alone in a 3 module box (or 1 gang BS) with a 3-module support frame and a 2-module plate
For lamps:
- 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps
- 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour
- 60-1000 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers
○ White - 2 modules
● Magnesium - 2 modules

1	5 722 40	
1	5 727 40	

Trailing/leading edge dimmers

Push-button dimmer - 2 x 400 W
With Magnesium circle for control
Supplied with support frame
○ White - 2 modules
● Black - 2 modules

Push-button dimmer - 2 x 400 W
With Magnesium circle for control
Supplied with support frame
○ White - 2 modules
● Magnesium - 2 modules

1	5 743 07	
1	5 743 57	
1	5 743 06	
1	5 743 56	

Universal dimmers

Without neutral, 2 wires
Push-button dimmer for all types of lamps:
- Dimmable LEDs: 75 W
- Dimmable compact fluorescent lamps: 75 W
- Halogen with transformer: 400 VA
- Fluorescent tube: 200 VA
- Halogen 230 V and incandescent: 400 W
Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control
Lights come on again at the same lighting level as before they were last switched off
○ White - 2 modules
● Magnesium - 2 modules

1	N 5 743 19	
1	5 743 39	

Dimmers 0-10 V

N Push-button dimmer for ballasts 0-10 V
○ White - 2 modules
● Magnesium - 2 modules

1	N 5 743 18	
1	5 743 38	

Arteor™ load selection charts

Load selection charts

	Cat.Nos	Universal							
		Leading edge				Trailing edge			
		Incandescent lamp		Halogen lamp		ELV halogen with ferromagnetic transformer		ELV halogen with electronic transformer	
		110 V	230 V	110 V	230 V	110 V	230 V	110 V	230 V
Micropush switches	5 740 04/54 5 743 04/54	200 W	400 W	200 W	400 W	200 VA	400 VA	200 VA	400 VA
	5 740 02/52 5 743 02/52	2 x 200 W	2 x 400 W	2 x 200 W	2 x 400 W	2 x 200 VA	2 x 400 VA	2 x 200 VA	2 x 400 VA
	5 740 03/53 5 743 03/53	500 W	1000 W	500 W	1000 W	250 VA	500 VA	250 VA	500 VA
	5 740 00/50 5 743 00/50	2 x 500 W	2 x 1000 W	2 x 500 W	2 x 1000 W	2 x 250 VA	2 x 500 VA	2 x 250 VA	2 x 500 VA
	5 740 01/51 5 743 01/51	3 x 500 W	3 x 1000 W	3 x 500 W	3 x 1000 W	3 x 250 VA	3 x 500 VA	3 x 250 VA	3 x 500 VA
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55	500 W	1000 W	500 W	1000 W	250 VA	500 VA	250 VA	500 VA
	5 740 06/56 5 743 06/56	300 W	600 W	300 W	600 W	225 VA	450 VA	300 VA	600 VA
Dimmers	5 722 13 5 727 13	200 W	400 W	200 W	400 W	200 VA	400 VA		
	5 735 01 5 737 01 5 722 40 5 727 40	500 W	1000 W	500 W	1000 W	500 VA	1000 VA	300 VA	600 VA
	5 722 11 5 727 11 5 743 05/55	300 W	600 W	300 W	600 W	300 VA	600 VA		
	5 722 39 5 727 39 5 743 19 5 743 39	200 W	400 W	200 W	400 W	200 VA	400 VA	200 VA	400 VA
	5 740 07/57 5 743 07/57	2 x 200 W	2 x 400 W	2 x 200 W	2 x 400 W	2 x 200 VA	2 x 400 VA	2 x 200 VA	2 x 400 VA
	5 722 41 5 727 41	500 W	1000 W	500 W	1000 W	500 VA	1000 VA	500 VA	1000 VA
	5 740 10/60	1100 W	2200 W	1100 W	2200 W	1100 VA	2200 VA	1100 VA	2200 VA

	Cat.Nos	Universal					
		Fluorescent tube		Compact fluorescent lamp		LED	
		110 V	230 V	110 V	230 V	110 V	230 V
Micropush switches	5 740 03/53 5 743 03/53	250 VA	500 VA	250 VA	500 VA	250 VA	500 VA
	5 740 00/50 5 743 00/50	2 x 250 VA	2 x 500 VA	2 x 250 VA	2 x 500 VA	2 x 250 VA	2 x 500 VA
	5 740 01/51 5 743 01/51	3 x 250 VA	3 x 500 VA	3 x 250 VA	3 x 500 VA	3 x 250 VA	3 x 500 VA
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55	250 VA	500 VA	250 VA	500 VA	250 VA	500 VA
	5 722 39 5 727 39 5 743 19 5 743 39	100 VA	200 VA	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max

	Cat.Nos	Ballasts 0-10 V		Ballasts DALI		Reducer motor for shutters	
		110 V	230 V	110 V	230 V	110 V	230 V
Micropush switches	5 740 02/52 5 743 02/52					50 VA	100 VA
	5 740 03/53 5 743 03/53					2 x 50 VA	2 x 100 VA
	5 740 00/50 5 743 00/50					3 x 50 VA	3 x 100 VA
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55					50 VA	100 VA
	5 722 38 5 727 38 5 743 18 5 743 38	300 VA 40 mA	600 VA 40 mA				
Dimmers	5 740 10/60	1100 VA 50 mA	2200 VA 50 mA	60 ballast	60 ballast		



 Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Automatic switches	Pack	Cat.Nos	Miniature emergency lighting unit
1	5 740 47	Measurement of luminosity threshold Adjustment of luminosity threshold and time delay Max. lux and min. time delay factory pre-set Settings modified on the device via thumbwheel or configuration tool Cat.Nos 0 882 30 and 0 882 35 (p. 382) Recommended fixing height: 1 m IR detection 180° Adjustable luminosity threshold: 5 to 1275 lux Time delay adjustable from 5 s to 30 min Consumption 0,2 W on standby Optimum distance between 2 sensors: 6 m Installation in box min. depth 40 mm recommended 2 modules Range 8 m With neutral, 3-wire - 1000 W Operates: - 2000 W incandescent and halogen lamps 230 V~ - 1000 VA ELV halogen lamps with ferromagnetic or electronic transformer - 500 VA compact fluorescent lamps - 0 to 250 W for LEDs <input type="radio"/> White <input checked="" type="radio"/> Magnesium	1	5 722 22	Illuminates automatically upon power failure Unclips from frame to become portable LEDs indicating mains and charging status 2 modules <input type="radio"/> White
1	5 740 97		Without neutral, 2-wire, 400 W Operates: - 400 W incandescent and halogen lamps 230 V~ - 400 VA ELV halogen lamps with ferromagnetic or electronic transformer <input type="radio"/> White <input checked="" type="radio"/> Magnesium	1	5 722 21
1	5 740 34	180° switch sensors Infrared and ultrasonic detection, range 8 m Recommended fixing height: 1.20 m Standby consumption: 0.2 W Optimum distance between 2 sensors: 6 m 3-wire cable IP 41 For installation in box, depth 40 mm min., or in surface-mounting box Cat.No 0 802 81 2 modules Vacancy mode with neutral Dual-tech - Maximum range 8 m - IP 41 <input type="radio"/> White <input checked="" type="radio"/> Magnesium	1	5 727 26	Illuminated lighting unit 230 V - 1 W Supplied with 4 coloured labels 1 module <input type="radio"/> White
1	5 740 94		Overdoor lighting units Supplied with diffusers and LED 2 modules <input type="radio"/> White with red diffuser <input type="radio"/> White with white diffuser		
1	5 740 49	Lamps For locator switch LED 230 V - blue For indicator switch LED 230 V - red LED 24 V - red LED 12 V - red 	10	5 724 52	Lamps For locator switch LED 230 V - blue For indicator switch LED 230 V - red LED 24 V - red LED 12 V - red
1	5 740 99		10	5 724 53	
			10	5 722 23	
			10	5 724 54	



Arteor™

lighting control, emergency push-buttons



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Time delay switches
1 1	5 720 55 5 740 84	<p>Interference suppression conforming to standard EN 55022 For timer control of a circuit with the following loads: - 1000 W incandescent and halogen 230 V~ - 2300 W resistive (heating) - 400 VA fluorescent and ELV halogen Adjustable from 25 s to 15 min It is possible to install a number of timer switches in parallel on the same circuit With integrated LED 2-wire installation in box min. depth 40 mm 2 modules</p> <p> White Magnesium</p>
1 1	5 722 27 5 727 27	<p>Single pole latching relays 10 A - 250 V~</p> <p>Used to bring functions with low breaking capacity close to the application Resistive: 3000 W Incandescent: 1800 W LV halogen: 1800 W Fluorescent: 400 VA Motors (roller blind type): 530 W 2 modules</p> <p> White Magnesium</p>
1 1	5 723 63 5 723 62	<p>Emergency stop mushroom head push-buttons 10 A - 250 V~</p> <p>N/O + N/C 2 modules</p> <p>With key Unlock with RONIS key no. 601</p> <p> Yellow/red</p> <p>1/4 turn 1/4 turn unlocking Yellow/red</p>

Arteor™

double pole switches, cooker control unit



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with plates (p. 271 to 278). Support frame not needed

Pack	Cat.Nos	Double pole switches 40 A - 250 V~
5 5	5 720 81 5 725 81	<p>Conform to EN 60669-1: 2000 and SANS 164-1 Captive terminal screws For flush-mounting box to be min. 48 mm deep Use US plate 4" x 4" - 2 modules</p> <p>Double pole switch</p> <p> White Magnesium</p>
5 5	5 720 82 5 725 82	<p>Double pole switch + neon</p> <p> White Magnesium</p>
5 5	5 720 80 5 725 80	<p>Double pole switches 45 A - 250 V~</p> <p>Conform to EN 60669-1: 2000 Captive terminal screws For flush-mounting box to be min. 48 mm deep</p> <p>Double pole switch + neon - 2 gang</p> <p>Use BS plate 3 modules</p> <p> White Magnesium</p>
5 5	5 720 87 5 725 87	<p>Double pole switch + neon - 1 gang</p> <p>Use BS plate 2 modules</p> <p> White Magnesium</p>
5	5 720 88	<p>Cooker control unit 250 V~</p> <p>Conform to BS 4177: 1992 45 A double pole switch + 13 A double pole switched socket outlet Use special plate (p. 271) White</p>



 Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)


Pack	Cat.Nos	Fan controllers	Pack	Cat.Nos	Electric roller blind controllers - 250 V~
		2 modules			For control via automatic box (N/O mechanism) Double push-button - 10 A 2 modules
1	5 722 17	AC speed control - 4 positions ○ White	10	5 722 19	○ White - square version
1	5 727 17	● Magnesium	10	5 727 19	● Magnesium - square version
		Rotary speed controller for fan Operates 40 to 400 VA limit switch For progressive speed control of ceiling fan	10	5 732 19	○ White - round version
1	5 722 18	○ White	10	5 737 19	● Magnesium - round version
1	5 727 18	● Magnesium			For direct control of a motor (mechanism with fixed positions) Double push-button - 10 A 2 modules
5	5 722 15	Fan step regulator - 100 W ○ White	10	5 722 20	○ White - square version
5	5 727 15	● Magnesium	10	5 727 20	● Magnesium - square version
		Thermostats	10	5 732 20	○ White - round version
		Electronic room thermostat Control knob with index and adjustable segments for min. and max. settings Adjustable range from 5 °C to 30 °C (+/- 0.5 °C) Power supply: 230 V~ - 50/60 Hz One potential free changeover contact output Suitable for controlling heated ceilings and underfloor heating - LV use breaking capacity: 8 A - 250 V~ - resistive inductive circuit 2 A - 250 V~ - inductive circuit - ELV use breaking capacity: 12 to 48 V~ - 12 to 24 V=, from 1 mA min. to 500 mA max.	10	5 737 20	● Magnesium - round version
1	5 722 03	○ White			RCBO - 16 A - 230 V~ Single pole + Neutral - 30 mA - 2 modules The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth With test button ○ White
1	5 727 03	● Magnesium	1	5 723 60	
		Thermostat for electric floor heating With one potential free N/O contact and LED 16 A - 230 V~ Adjustable range from 10 °C to 60 °C 2 modules			Thermal magnetic proximity MCB Single pole + Neutral - 230 V~ - 16 A Used for local protection of part in a circuit (e.g. 2P+E socket) against overloads and short-circuits Main protection being close to the user plus discriminating allows immediate reset Can also be used as a local consumption limiter (depending on its rating) Breaking capacity: 3000 A - 2 modules ○ White
1	5 722 63	○ White	1	5 723 61	
1	5 727 63	● Magnesium			
		Curtain switches			
		1 module			
5	5 722 02	Curtain switch centre off ○ White			
5	5 727 02	● Magnesium			
5	5 722 01	Curtain switch centre retract ○ White			
5	5 727 01	● Magnesium			

Arteor™

British standard socket outlets



5 721 43

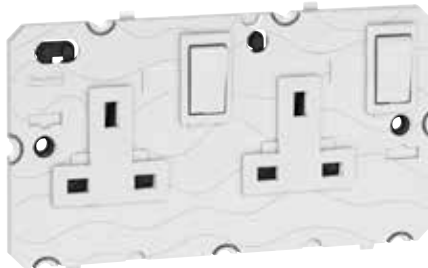

5 721 49



5 726 50

Support frame and plate selection charts **p. 271**

Mechanisms supplied with rocker plates, to be equipped with special plates (p. 271, 272)
Support frame not needed

Pack	Cat.Nos	Single pole socket outlets 13 A - 250 V~
10	5 721 43	Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 271, 272) 2P+E switched - 1 gang ○ White ● Magnesium
10	5 726 43	
10	5 721 44	2P+E switched + neon - 1 gang ○ White ● Magnesium
10	5 726 44	
5	5 721 45	2P+E switched - 2 gang ○ White ● Magnesium
5	5 726 45	
5	5 721 46	2P+E switched + neon - 2 gang ○ White ● Magnesium
5	5 726 46	
Double pole socket outlets 13 A - 250 V~		
5	5 721 47	Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 271, 272) 2P+E switched - 1 gang ○ White ● Magnesium
5	5 726 47	
5	5 721 49	2P+E switched - 2 gang ○ White ● Magnesium ● Red for standard and clean earth applications Non standard pin configuration
5	5 726 49	
5	5 721 41	

Pack	Cat.Nos	Double pole socket outlets 5 A - 250 V~
10	5 721 40	Shuttered for child safety Conform to BS 546 Use special plates (p. 271, 272) 2P+E switched - 1 gang ○ White ● Magnesium
10	5 726 40	
Fused connection units		
Double pole fused 13 A (fuse supplied) Flex outlet knockout and cord grip Captive fuse carrier (padlockable) Captive terminal screws Conform to BS 1363: part 4 Use special plates (p. 271, 272)		
5	5 721 50	Switched ○ White ● Magnesium
5	5 726 50	
5	5 721 51	Switched + neon ○ White ● Magnesium
5	5 726 51	
10	5 721 57	Unswitched ○ White ● Magnesium
10	5 726 57	


Support frame and plate selection charts p. 271-278

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Multistandard socket outlets
10	5 721 23	2P+E unswitched - shuttered for child safety - 2 modules ○ White ● Magnesium
10	5 726 23	
5	5 721 35	2P+E switched - shuttered for child safety - 3 modules ○ White ● Magnesium
5	5 726 35	

Pack	Cat.Nos	British standard socket outlets
		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 271, 272)
5	5 721 32	2P+E switched - 15 A Conform to BS 546 3 modules ○ White ● Magnesium
5	5 726 32	
10	5 721 11	2P+E - 13 A Conform to BS 1363 Part 2 ASTA licence 2 modules ○ White ● Magnesium
10	5 726 11	
5	5 721 30	2P+E switched - 13 A Conform to BS 1363 Part 2 ASTA licence 3 modules ○ White ● Magnesium ● Red dedicated non standard pin Use with plug Cat.No 6 745 32
5	5 726 30	
5	5 724 67	
10	5 721 10	2P+E - 5 A Conform to BS 546 2 modules ○ White ● Magnesium
10	5 726 10	

Pack	Cat.Nos	German standard socket outlets 16 A
		2 modules 2P+E shuttered for child safety ○ White ● Magnesium ● Red tamper-proof ● Dedicated green ● Dedicated orange
10	5 721 18	
10	5 726 18	
10	5 724 63	
10	5 724 62	
10	5 724 60	
10	5 721 19	2P+E with cover ○ White ● Magnesium
10	5 726 19	
		Euro-US type socket outlets - 15 A -127 V / 16 A - 250 V
10	5 721 04	2P with shutters - 1 module ○ White ● Magnesium
10	5 726 04	
10	5 721 16	2P+E with shutters - 2 modules ○ White ● Magnesium
10	5 726 16	
5	5 721 33	2 x 2P+E with shutters - 3 modules ○ White ● Magnesium
5	5 726 33	

Pack	Cat.Nos	American type socket outlets 15 A - 127 V
10	5 721 05	2P - 1 module ○ White ● Magnesium
10	5 726 05	
10	5 721 17	2P+E - 2 modules ○ White ● Magnesium
10	5 726 17	
5	5 721 34	2 x 2P+E with shutters - 3 modules ○ White ● Magnesium
5	5 726 34	

 Multistandard socket catalogue
www.docexport.legrand.com


 Special cover plates for trunking,
 p. 269


Arteor™

international socket outlets (continued)



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	South African type socket outlets - 16 A
10	5 721 22	2P+E - shuttered for child safety - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Red
10	5 726 22	
10	5 724 61	
5	5 721 32	2P+E switched - shuttered for child safety - 3 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Red dedicated
5	5 726 32	
5	5 724 65	
1	5 720 22	2 x 2P+E switched - pre-wired - 2 gang Supplied with support frame Use 2 x 3 modules plate <ul style="list-style-type: none"> ○ White ● Magnesium
1	5 725 22	
10	5 721 00	ELV socket outlets 3 A 2P 12 mm fixing centres for plug Cat.No 0 500 05 1 module <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 00	
20	0 500 05	Plug 2P - 3A for ELV socket outlet 12 mm fixing centres pins Ø3.6 mm
10	5 721 01	Italian type socket outlets 1 module 2P+E on line - 10 A <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 01	
10	5 721 03	2P+E shuttered for child safety - 10/16 A <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 03	
10	5 721 02	Swiss type socket outlets 2P+E type 12 shuttered for child safety - 10/16 A 1 module <ul style="list-style-type: none"> ○ White
10	5 721 15	
10	5 721 15	2P+E type 13 shuttered for child safety - 10 A 2 modules <ul style="list-style-type: none"> ○ White

Pack	Cat.Nos	Australian type socket outlets
10	5 721 14	2 modules 2P+E auto-switched shuttered for child safety - 10 A <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 14	
10	5 721 12	2P+E shuttered for child safety - 10/15 A <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 12	
10	5 721 13	Chinese type socket outlets 2P+E shuttered for child safety - 10 A 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 13	
10	5 721 21	2P+E shuttered for child safety - 16 A 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 21	
5	5 721 31	2P+E Chinese + 2P Euro-US - 10 A 3 modules <ul style="list-style-type: none"> ○ White ● Magnesium
5	5 726 31	
10	5 721 24	Israeli type socket outlets 2P+E shuttered for child safety <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 24	
10	5 720 20	French standard socket outlets 10/16 A 2 modules 2P shuttered for child safety <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 725 20	
10	5 720 21	2P+E shuttered for child safety <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 725 21	
10	5 724 66	2P+E tamper-proof Used to identify a mains circuit (e.g. inverter) and avoid connection of unnecessary equipment which may cause interference on the circuit <ul style="list-style-type: none"> ● Red
10	0 502 99	Tamperproof insert for Cat.No 5 724 66 Tamperproof insert for socket Fits directly into the plug

Supports for installation of Arteor socket outlets, **p. 499**



Arteor™ USB chargers

square version



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	USB power supplies
5 1	5 720 78 5 725 78	<p>For recharging portable devices Conform to IEC 62684-2011-01 Consumption in passive mode < 0.1 W 2P+E tap-off connection via 2.5 mm² screw terminals Supplied without cord</p> <p>Double USB sockets - 5 V - 1500 mA For fast charging telephones, smartphones, MP3/MP4 players and tablet PC 2 modules</p> <p> ○ White ● Magnesium</p>
10 10	5 720 71 5 725 71	<p>Single USB sockets - 5 V - 750 mA For Smartphone 1 module</p> <p> ○ White ● Magnesium</p>
1 1	5 720 73 5 725 73	<p>USB power supplies with retractable cord For recharging portable devices such as telephones and smartphones Single socket 5 V - 1000 mA equipped with a retractable cord with micro USB connector Conform to IEC 62684-2011-01 Consumption in passive mode < 0.2 W 2P+E tap-off connection via 2.5 mm² screw terminals Cord length: 30 cm 2 modules</p> <p> ○ White ● Magnesium</p>
10	0 803 99	<p>Support for portable device on charge Prevents device from any fall risk and allows secure use of device while charging Wall-mounting Fixing tools supplied</p> <p> For 1 portable device Supplied with retractable USB/micro USB version (60 cm/resistance > 7500 manipulations) Can charge and make PC synchronisation</p>

Arteor™ USB chargers

round version



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	USB power supplies
10 1	5 724 88 5 733 98	<p>For recharging portable devices Conform to IEC 62684-2011-01 Consumption in passive mode < 0.1 W 2P+E tap-off connection via 2.5 mm² screw terminals Supplied without cord</p> <p>Double USB sockets - 5 V - 1500 mA For fast charging telephones, smartphones, MP3/MP4 players and tablet PC 2 modules</p> <p> ○ White ● Magnesium</p>
1 1	5 724 83 5 733 93	<p>USB power supplies with retractable cord For recharging portable devices such as telephones and smartphones Single socket 5 V - 1000 mA equipped with a retractable cord with micro USB connector Conform to IEC 62684-2011-01 Consumption in passive mode < 0.2 W 2P+E tap-off connection via 2.5 mm² screw terminals Cord length: 30 cm 2 modules</p> <p> ○ White ● Magnesium</p>
10	0 803 99	<p>Support for portable device on charge Prevents device from any fall risk and allows secure use of device while charging Wall-mounting Fixing tools supplied</p> <p> For 1 portable device Supplied with retractable USB/micro USB version (60 cm/resistance > 7500 manipulations) Can charge and make PC synchronisation</p>

Arteor™ USB chargers

Relevant, economic and environmental decision


Finished outlets occupied by bulky and unsightly mobile chargers or chargers forgotten office or hotel. Installed in a few key places, universal chargers USB ports provide a daily service and significant availability. With a simple USB cable, you can immediately access the charging of the mobile device. The desk, next to the kitchen worktop or in headboard.

Thanks to its dual USB connectors, two devices can be charged simultaneously and quickly: smartphone, tablet, joystick or mobile GPS. A valuable service to peak hours of family, significant from 1 h load due to self its mechanism in 1500 mA exclusive and very powerful.


Easy to install, the USB port is powered by transplanting a single socket (P/N) or in place of existing outlet. Users will spot easily charging points installed in different areas with an explicit symbol.

Very economical in its design and with a standby consumption < 0.1 W, 5 times lower than the normative requirement of reference, it can reduce its energy consumption every day and contribute to protect planet.

Installation



By simple tap-off on 2P+E socket
Wiring 1.5 or 2.5 mm²
Class II product which does not require earthing
Releases a 2P+E socket recess




Average charge time for a smartphone with a 1500 mA charger

Brand	Smartphone	Average charge time 80 %	Average charge time 100 %
RIM	Blackberry Torch 9810	01h01	01h23
Apple	iPhone 3GS	01h04	02h07
Apple	iPhone 4S	01h14	01h56
Apple	iPhone 5	01h14	02h20
Motorola	Defy - MB525 - Jordan	01h13	01h47
Nokia	Lumia 800 - Sea Ray	01h39	02h33
Samsung	Galaxy S III - 19300	01h47	02h43
Samsung	Galaxy S IV	02h00	02h59
Sony	XPERIA S - LT26i - Arc HD Nozomi	01h20	02h05
		average < 1h15	average < 2h


Universal duo USB charging socket

Can quickly charge all mobiles in the family

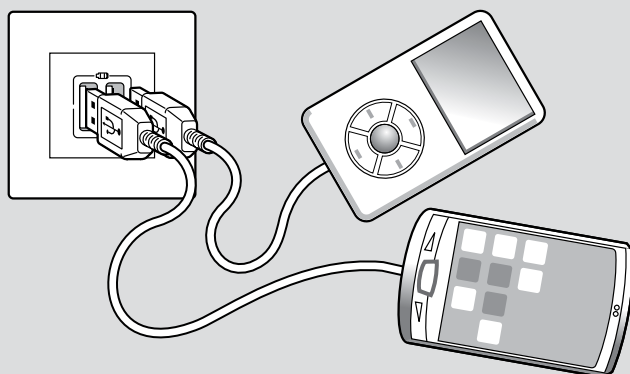


Universal proximity socket

Ideal for everyday needs

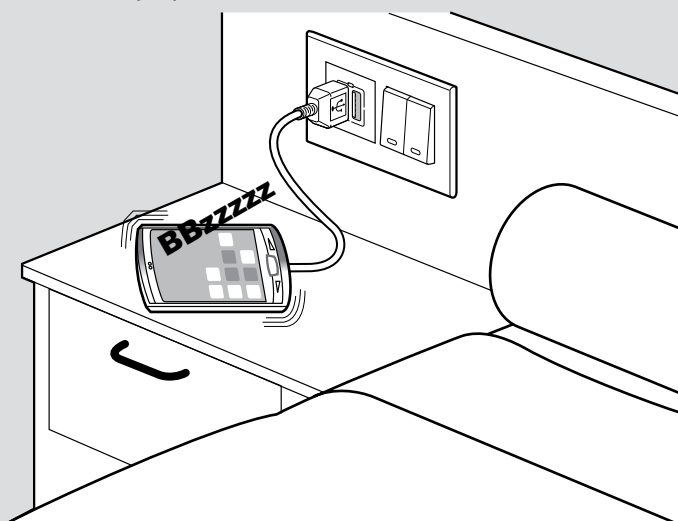

The Micro USB version with retractable cord

Always have the cord available

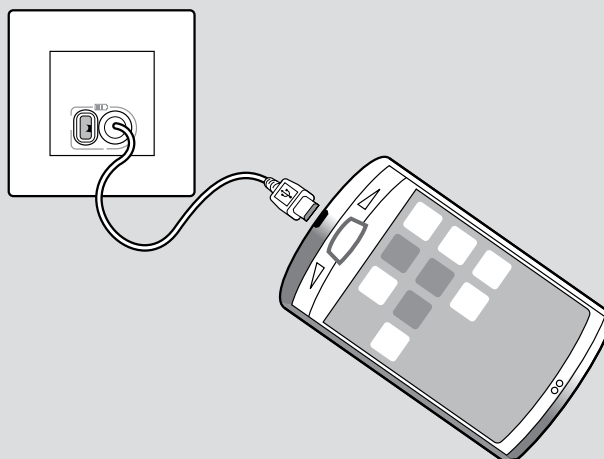



 Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

RJ 11 and RJ 12 sockets

Pack	Cat.Nos	Description
		Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)
		RJ 11 - 1 module 4 contacts
10	5 723 00	○ White
10	5 728 00	● Magnesium
		RJ 11 - 2 modules 4 contacts
10	5 723 13	○ White
10	5 728 13	● Magnesium
		RJ 12 - 2 modules 6 contacts
10	5 723 12	○ White
10	5 728 12	● Magnesium

Television sockets

Pack	Cat.Nos	Description
		For aerial and satellite installation (with individual demodulator) DTT and HDTV compatible Shielded star socket TV: male connector (Ø9.5 mm), attenuation - 1.5 dB R: female connector (Ø9.5 mm), attenuation - 1.5 dB SAT: "F" type connector, attenuation - 1.5 dB Recommended coaxial cable: 17/19 VATC
		TV-R-SAT sockets TV: 5-68 /120-862 MHz R: 87.5-108 MHz SAT: 950-2400 MHz 2 modules
10	5 721 72	○ White
10	5 726 72	● Magnesium
		TV-R sockets TV: 5-68 /120-862 MHz R: 87.5-108 MHz 2 modules Class A and 4G/Lte Protected
10	5 721 70	○ White
10	5 726 70	● Magnesium
		TV sockets TV: 0-2400 MHz 1 module
10	5 721 71	○ White
10	5 726 71	● Magnesium
		TV sockets "F" type with screws SAT: 0-2400 MHz 1 module
10	5 721 63	○ White
10	5 726 63	● Magnesium
		TV sockets for Singapore For cable vision 3 modules
1	5 721 80	○ White
1	5 726 80	● Magnesium



Arteor™

RJ 45 sockets



Support frame and plate selection charts **p. 271-278**

With LCS² connector with fast connection thanks to integrated crimping
 Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables
 Contacts marked with dual colour code and wiring schemes T568 A and T 568 B
 Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568 C
 Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Cat. 6 _A sockets
		360° metal shielding
		STP - 1 module
10	5 723 06	○ White
10	5 728 06	● Magnesium
10	5 723 51	○ White with orange shutter
10	5 728 51	● Magnesium with orange shutter
10	5 723 52	○ White with green shutter
10	5 728 52	● Magnesium with green shutter
		STP with controlled access - 2 modules Supplied with 2 keys for 5 sockets
5	5 723 50	○ White with red shutter
5	5 728 50	● Magnesium with red shutter
		UTP - 1 module
10	5 723 49	○ White
10	5 728 49	● Magnesium
10	5 723 59	○ White with green shutter
10	5 728 59	● Magnesium with green shutter
10	5 723 58	○ White with orange shutter
10	5 728 58	● Magnesium with orange shutter
		UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets
5	5 723 57	○ White with red shutter
5	5 728 57	● Magnesium with red shutter

Pack	Cat.Nos	Cat. 6 sockets
		UTP - 1 module
10	5 723 02	○ White
10	5 728 02	● Magnesium
10	5 723 54	○ White with orange shutter
10	5 728 54	● Magnesium with orange shutter
10	5 723 55	○ White with green shutter
10	5 728 55	● Magnesium with green shutter
		UTP - 2 modules
10	5 723 14	○ White - square version
10	5 728 14	● Magnesium - square version
10	5 723 24	○ White - round version
10	5 728 24	● Magnesium - round version

Pack	Cat.Nos	Cat. 6 sockets (continued)
		UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets
5	5 723 53	○ White with red shutter
5	5 728 53	● Magnesium with red shutter
		UTP with retractable cord - 4 modules Cord (0.9 m) winds up automatically with a pushbutton
1	5 723 39	○ White
1	5 728 39	● Magnesium
		FTP - 1 module
10	5 723 22	○ White
10	5 728 22	● Magnesium
		FTP - 2 modules
10	5 723 16	○ White
10	5 728 16	● Magnesium
		STP shielded - 1 module
10	5 723 23	○ White
10	5 728 23	● Magnesium
		STP shielded - 2 modules
10	5 723 17	○ White
10	5 728 17	● Magnesium

Pack	Cat.Nos	Cat. 5e sockets
		UTP - 1 module
10	5 723 03	○ White
10	5 728 03	● Magnesium
		UTP - 2 modules
10	5 723 15	○ White
10	5 728 15	● Magnesium
		FTP - 1 module
10	5 723 04	○ White
10	5 728 04	● Magnesium



5 723 31



5 728 32



5 723 36



5 728 35



5 720 83

 Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Rear pluggable RJ 45 sockets

Pack	Cat.Nos	
		Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568 Contacts marked with 568 A and B dual colour code and numbers Connectors with self-stripping terminals Possibility of re-wiring in the event of error Multidirectional cable entry For use with area distribution boxes (p. 415), connection to boxes via RJ45-RJ45 dedicated cords (p. 415) Used to create Cat. 6 and Cat. 5e links in accordance with standards 2 modules
10	5 723 31	○ White ● Magnesium
10	5 728 31	
10	5 723 33	○ White ● Magnesium
10	5 728 33	
10	5 723 30	○ White ● Magnesium
10	5 728 30	
10	5 723 32	○ White ● Magnesium
10	5 728 32	

Telephone/Ethernet wiring splitters

Pack	Cat.Nos	
		Provide increased security against theft and damage to double connectors Provide a rate of 10/100 Mbps Multidirectional cable entry Can be installed in all supports depth min. 35 mm Telephone and Ethernet applications marked on the protective cap 1 module
		FTP - double connector 9 contacts
10	5 723 36	○ White ● Magnesium
10	5 728 36	
		UTP - double connector 8 contacts
10	5 723 35	○ White ● Magnesium
10	5 728 35	
		Ethernet 10/100 base T switches Possible to extend an existing network by simply replacing an RJ 45 socket Voltage power indicator on the front panel Secure access to the Reset function Conforming to standards IEEE 802.3 (Ethernet) and EN 500 81/82-2 (EMC requirements) Require the use of Ethernet 10/100 base T network cards on the peripherals for 10/100 Mbps data exchanges Equipped with 6 front ports + 1 RJ 45 connector on the side for wiring and carrying out testing of the link No tool required for connection Port status display integrated in the RJ 45 connectors Support of the total forwarding capacity on all ports Integrated marker-holder for identification of the switch Marking of ports from 1 to 6 6 modules
1	5 720 83	230 V supply - non manageable ○ White ● Magnesium
1	5 728 83	
1	5 720 84	PoE supply (802-3 af) - non manageable ○ White ● Magnesium
1	5 728 84	
1	5 720 85	230 V supply - manageable ○ White ● Magnesium
1	5 728 85	

Arteor™

Wi-Fi access points



5 723 76

Support frame and plate selection charts p. 271-278


Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Wi-Fi access points
		<p>Dual-band and dual-radio. Conform with standards 802.11a and 802.11b/g Gross speed: 54 Mbps max. on each frequency (802.11a and 802.11g) simultaneously Can be installed in addition to a new or existing LCS/LCS² structured wiring system to meet mobile working requirements Can be integrated into all compatible supports with minimum 40 mm depth Tool-free network connection via RJ 45 connector PoE power supply (Power over Ethernet - standard 802.3 af) The installation must include at least: - Wi-Fi access point - a PoE injector (p. 421) conforming with 802.3 af (LCS² unit format) to be installed in the patch panel The management function allows the network administrator to manage Wi-Fi access points remotely via a web interface Security via WPA2 encryption (802.11i) and 802.1x authentication Guest access: allows visitors free access to the Internet (access independent of the main Wi-Fi network) 4 modules</p>
		With RJ 45 socket on the front panel
1	5 723 76	○ White
1	5 728 76	● Magnesium
		Without RJ 45 socket
1	5 723 77	○ White
1	5 728 77	● Magnesium
		Without RJ 45 socket - Standard 802.11 b/g only
1	5 723 78	○ White
1	5 728 78	● Magnesium

Arteor™

Wi-Fi access points

Installation principle

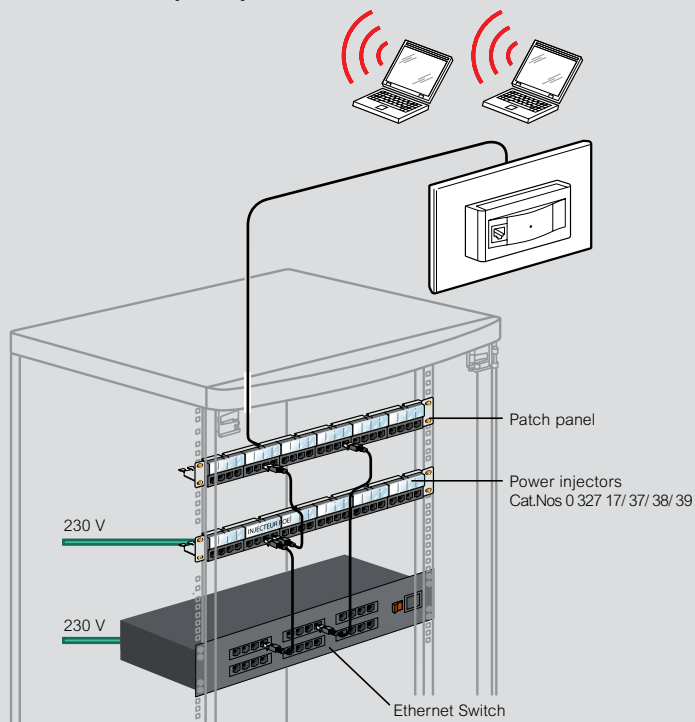

Wi-Fi access points

A 802.11 a and b/g solution

Radio communication standard	802.11 b/g	802.11 a
Power over Ethernet standard	802.3 af	
Frequency band	between 2.40 and 2.48 GHz	5 GHz
Number of available channels	13	8
Max. data rate	54 Mbps	54 Mbps

Advantages of a Legrand Wi-Fi access point

- Possibility of simultaneous operation on 2 frequencies, a and b/g
- Provides a max. data rate of up to 2 x 54 Mbps in simultaneous mode
- Very high security level: encryption (WPA2 - 802.11i) and authentication (802.1x)
- Possibility of roaming (moving from one access point to another without breaking the link)
- Quality of service (priority automatically given to voice, then video and finally data) in accordance with standard 802.11e
- Easy to configure and make secure with the quick configuration node

NEW: Guest access to offer a free access for the guest and keep independent and secure the main Wi-Fi network

Installation

In all supports that can take an Arteor mechanism (ducting, columns, flush-mounting boxes, floor boxes, etc)
Do not place access points behind an obstacle that would limit the radiation of the antenna
Access points are connected in the same way as RJ 45 sockets

Sizing

- Provide 1 access point for 1 localised requirement
- Provide 1 access point per 100 m² for global coverage and a maximum gross speed
- Provide 1 access point with an RJ 45 socket for an office used by visitors

Legrand services

To guide you in setting up your VDI sites:

- Help with sizing the installation
- On site assistance for integrating products and making important installations secure



5 723 37



5 728 38



5 720 94



5 727 75



5 732 74

Support frame and plate selection charts p. 271-278

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Adaptors for Ortronics data sockets

Pack	Cat.Nos	Description
10	5 723 05	Equipped with transparent label-holder Single Clarity TRACKJACK connector - 1 module Straight plug
10	5 728 05	○ White ● Magnesium
10	5 723 34	Single Clarity TRACKJACK connector - 2 modules Inclined plug
10	5 728 34	○ White ● Magnesium
10	5 723 18	Single Clarity Rear load connector - 1 module Straight plug
10	5 728 18	○ White ● Magnesium

Adaptors for Keystone data sockets

10	5 723 37	Equipped with transparent label-holder Single connector - 2 modules
10	5 728 37	○ White ● Magnesium

Adaptors for Systimax data sockets

10	5 723 38	Equipped with transparent label-holder Single connector - 2 modules
10	5 728 38	○ White ● Magnesium

Female USB data sockets

		Used to bring connections closer to the user For connecting USB devices (scanner-printer, external hard disk) Maximum length: 5 m Recommended cable: USB A
		Preterminated - USB 3.0 - 1 module Equipped with a 15 cm cord
1	5 720 94	○ White - square version
1	5 725 94	● Magnesium - square version
		Preterminated - USB 3.0 - 2 modules Equipped with a 15 cm cord
1	5 724 74	○ White - round version
1	5 733 74	● Magnesium - round version
		Connection via screw terminals - USB 2.0 1 module Cross-section 1 mm ²
1	5 722 75	○ White - square version
1	5 727 75	● Magnesium - square version
		Connection via screw terminals - USB 2.0 2 modules Cross-section 1 mm ²
1	5 732 74	○ White - round version
1	5 737 74	● Magnesium - round version
		Female USB DATA amplifier - for data transfer Used to bring connections closer to the user in case of large distances For connecting USB devices (digital school board / interactive whiteboard...) located more than 5 m away from a source (computer...) The kit includes a transmitter (1 module) and a receiver (1 module) The link between the transmitter and the receiver is made via a RJ 45/RJ 45 cord
1	N 5 720 23	○ White - square version



Arteor™

attenuators and loudspeaker sockets



5 722 84



5 722 83



5 722 70

Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Attenuators
1	5 722 84	100 V - 25 W Allow to adjust power to 25 W from a balanced 100 V loudspeaker line 2 modules ○ White ● Magnesium
1	5 727 84	
1	5 722 83	3-pole XLR sockets For the stereo connection of any peripheral, microphone, mixing console Recommended cable: 1 audio pair 0.14 to 0.5 mm ² shielded Max. cable length: 50 m (beyond this an audio amplifier is recommended) 2 modules XLR female ○ White ● Magnesium
1	5 727 83	
1	5 722 77	XLR male ○ White ● Magnesium
1	5 727 77	
10	5 722 70	Loudspeaker sockets 4 mm ² terminals 1 module ○ White ● Magnesium
10	5 727 70	
10	5 722 80	2 modules ○ White ● Magnesium
10	5 727 80	

Arteor™

ords and cables



0 517 20



0 517 22




0 779 30

Pack	Cat.Nos	Cords
1	0 517 20	For connecting a socket to a terminal HDMI cord Length 10 m For connecting an HDMI socket to an audio/video terminal (plasma screen, DVD player, home cinema, games console, etc.) For use over a distance of more than 10 m, use the HDMI booster Cat.No 0 779 30
1	0 517 22	HD15 cord + 3.5 mm jack Length 2 m For connecting an HD15 video socket and a 3.5 mm audio jack to a terminal (PC, video projector)
1	0 779 30	HDMI booster Used to extend an HDMI connection Consists of 2 female connectors and used as an addition to the HDMI cord (for example cord Cat.No 0 517 20) Does not need an external power supply
1	0 327 80	Cables For connecting 2 sockets a long distance apart HDMI cables Length 20 m For connecting HDMI sockets over distances of up to 10 m
1	0 327 81	VGA cables Length 20 m For full pin connection of HD15 sockets over distances of up to 20 m




Arteor™

detectors and accessories



 Support frame and plate selection charts **p. 386-393**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 385) and plates (p. 386 to 393)

Pack	Cat.Nos	Water leak detectors
1	5 740 15	Indicates with a LED the presence of a conducting liquid The height at which the sensor is installed determines the level of flooding Consumption: - 0.1 mA in stand-by mode - 25 mA in alarm mode  ○ White ● Magnesium
1	5 740 65	
Accessories for detectors		
To be associated to the detector 2-wire connection 2 modules		
Transformers 230 V - 12 V		
1	5 740 35	 ○ White ● Magnesium
1	5 740 85	
Actuators for technical alarms		
1	5 740 36	 ○ White ● Magnesium
1	5 740 86	

**LEGRAND
PACKAGING**

**Practical
and, eco-friendly**

Legrand packaging – your assurance of a certified original product which is factory inspected, protected and clearly identifiable

Dustproof flaps:
effective protection of the product

Resealable box:
for easy management of the contents

Informative label:
- Catalogue number/
quantity
- Picture of the product
- Clear description
- Technical information
- Barcode
- Regulatory marking



The red and white box and the logo are registered trademarks

Eco-friendly:
- Recyclable cardboard packaging
- Printing inks comply with environmental standards



The right system to meet your needs

A wide range of technologies (HD15, HDMI, DISPLAY PORT, RCA, JACK) to suit the location and the user requirements

INSTALLATION EXAMPLE WITH HD15 PRETERMINATED SOCKET AND VIDEO PROJECTOR SWITCH

1 Quick
Installation

2 Easy
connection

3 Optimum
performance



1 Infrared ON/STANDBY control
for video projector associated
with a push-button
Cat.No 5 720 89

2 3 Preterminated HD15 sockets
Cat.No 5 720 97

4 10 m male/male HD15 cords
Cat.No 0 517 23

5 6 Male/male HD 15 cords


Support frame and plate selection charts p. 271-278

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos			Pack	Cat.Nos	
			Female HD15 sockets			Jack sockets 3.5 mm
			Used to transmit analog video streams (VGA, XGA, UXGA depending on graphic card) between a source (computer) and a compatible receiver (plasma, LCD, video projector, TV, etc...)			3.5 mm jack connectors can be used to create audio/video links
			Preterminated sockets - 1 module Equipped with cord, length 15 cm			Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	Square version	Round version	○ White ● Magnesium	1	Square version	○ White ● Magnesium
1	5 720 97	-		1	5 720 91	
1	5 725 97	-		1	5 725 91	
			Preterminated HD15 + 3.5 mm jack sockets - 2 modules Equipped with cord, length 15 cm			4 screw-type female 3.5 mm jack socket 1 module
1	-	5 724 78	○ White ● Magnesium	1	5 722 74	○ White ● Magnesium
1	-	5 733 78		1	5 727 74	
			Screw-type female HD15 sockets 2 modules			Solder-type female 3.5 mm jack socket 1 module
1	5 722 82	5 722 89	○ White ● Magnesium	1	5 722 78	○ White ● Magnesium
1	5 727 82	5 727 89		1	5 727 78	
			Screw-type female HD15 + 3.5 mm jack sockets - 2 modules			HD15 + 3.5 mm Jack amplifier
1	5 722 88	-	○ White ● Magnesium			Used to connect audio/video terminals more than 20 m apart up to 100 m
1	5 727 88	-				The video link is via an HD15 connector (resolution up to UXGA)
			Solder-type female HD15 sockets 1 module 15 pin			The stereo audio link is via a 3.5 mm jack
1	5 722 79	-	○ White ● Magnesium			The kit includes:
1	5 727 79	-				- One 4-module transmitter equipped with an HD15 connector and a 3.5 mm jack
			HDMI type A sockets			- One 4-module receiver equipped with an HD15 connector and a 3.5 mm jack
			Used to transmit high-definition digital audio/video streams between a source (HD-DVD drive, computer, etc) and a compatible receiver (TV, videoprojector...)			- One 4-module power supply to be connected on the mains then linked to the receiver or transmitter
			Preterminated sockets HDMI 1.4 - 1 module Equipped with cord, length 15 cm			The link between the transmitter and receiver is via a network cord RJ 45/RJ 45
1	Square version	Round version	○ White ● Magnesium	1	Square version	○ White
1	5 720 96	-			5 723 70	
1	5 725 96	-			N	
			Preterminated sockets HDMI 1.4 - 2 modules Equipped with cord, length 15 cm			
1	-	5 724 76	○ White ● Magnesium			
1	-	5 735 96				
			Screw-type sockets HDMI 1.3 - 2 modules			
1	5 722 81	5 722 85	○ White ● Magnesium			
1	5 727 81	5 727 85				

Patch panels, cables and cords, p. 435




BE UNIQUE

Arteor, the international range of wiring devices for residential buildings, offices and hotels, makes an up-to-date stand-alone solution just as unique as a sophisticated home automation network.

The almost unlimited possibilities of the new wall mounting MyHOME_Screen 10 with user-centered design and maximum customisation give creative planners and builders new freedom to turn their ideas into reality.





5 720 89



5 720 90



5 722 72



5 720 93



5 722 76


Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos		Pack	Cat.Nos	
1	Square version 5 720 89 	Videoprojector switch Universal remote switch allowing to turn ON or place in STANDBY mode a video projector Works with all videoprojectors or TV through IR learning process Installed close to the room's lighting switches, it replaces the constructors remote and fosters the ignition and extinction of the video projector therefore reducing energy consumption and extending the bulb's lifetime ○ White 	1 1	Square version 5 720 93 Round version 5 725 93	Female 3 RCA sockets Provide the composite video and stereo audio link for any peripheral device such as a DVD drive, camera, video recorder, videoconferencing, etc Preterminated - 1 module ○ White ● Magnesium Preterminated - 2 modules ○ White ● Magnesium Connection on screw terminals - 1 module ○ White ● Magnesium Connection on screw terminals - 2 modules ○ White ● Magnesium
1 1	Square version 5 720 90 5 725 90	Display port sockets Used to transmit high-definition digital audio/video streams between a source (laptop, computer, etc) and a compatible receiver (TV, videoprojector...) Preterminated socket - 1 module Equipped with cord, length 15 cm ○ White ● Magnesium Preterminated socket - 2 modules Equipped with cord, length 15 cm ○ White ● Magnesium 	1 1	5 722 73 5 727 73	Female BNC 75 sockets Provide the composite video link for any peripheral device such as a DVD drive, camera, video recorder, etc Connection on screw terminals - 1 module ○ White ● Magnesium
1 1	Round version 5 724 70 5 735 90		1 1	Square version 5 722 76 5 727 76	YUV sockets Provides the high definition analogue video link or a DVD, PC monitor, plasma screen, etc Connection on screw terminals - 1 module ○ White ● Magnesium
1 1	Square version 5 720 92 5 725 92	Female 2 RCA sockets Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder Preterminated - 1 module Equipped with a 15 cm cord ○ White ● Magnesium Preterminated - 2 modules Equipped with a 15 cm cord ○ White ● Magnesium Connection on screw terminals - 1 module ○ White ● Magnesium Connection on screw terminals - 2 modules ○ White ● Magnesium 	1 1	5 722 71 5 727 71	S-video sockets (4-pin mini-DIN) Provides the YC video link for any peripheral device such as a DVD drive, camera, video recorder, videoconferencing, etc Connection on screw terminals - 1 module ○ White ● Magnesium Connection on screw terminals - 2 modules ○ White ● Magnesium
1 1	- 5 724 72 5 735 92		1 1	5 744 01 5 744 51	
1 1	5 722 72 5 727 72		1 1	5 745 01 5 745 51	
1 1	- 5 732 72 5 737 72		1 1		

Arteor™

ancillary mechanisms

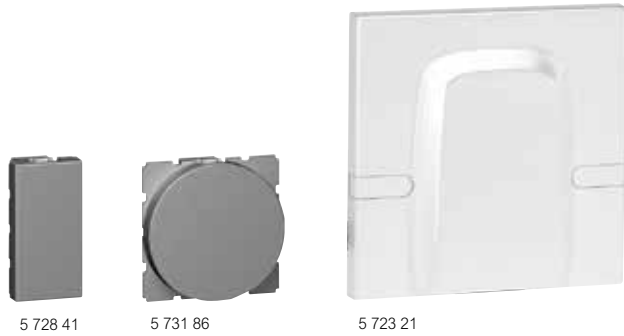

Arteor™

blinking cover plates



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Blank modules
10	5 723 41	1 module ○ White - square version ● Magnesium - square version
10	5 728 41	
10	5 723 42	2 modules ○ White - square version ● Magnesium - square version
10	5 728 42	
10	5 730 86	○ White - round version ● Magnesium - round version
10	5 731 86	
5	5 723 43	3 modules ○ White - square version ● Magnesium - square version
5	5 728 43	
5	5 730 96	○ White - round version ● Magnesium - round version
5	5 731 96	

10	5 723 20	Cable outlets 20 A cable outlet for junction - 2 modules ○ White
5	5 723 21	45 A cable outlet - BS 1 gang Supplied with cover plate For flush mounting back box to be min. 45 mm deep ○ White

10	5 723 07	Cord outlets 1 module with Ø8 mm entry ○ White
10	5 723 19	2 modules ○ White

Support frame and plate selection charts **p. 271-278**

To be equipped with support frames and plates

Pack	Cat.Nos	British standard blanking cover plates
5	5 751 30	For 1 gang box ○ White ● Pearl Alu ● Graphite
5	5 751 31	
5	5 751 32	
5	5 751 40	For 2 gang box ○ White ● Pearl Alu ● Graphite
5	5 751 41	
5	5 751 42	
10	5 754 10	Italian/US standard blanking cover plates For 2" x 4" boxes ○ White ● Pearl Alu ● Graphite
10	5 754 11	
10	5 754 12	
5	5 753 60	US standard blanking cover plates For 4" x 4" boxes ○ White ● Pearl Alu ● Graphite
5	5 753 61	
5	5 753 62	

Arteor™

mounting supports, special plates and mounting boxes




Support frame and plate selection charts **p. 271-278**

Pack	Cat.Nos	Panel mounting supports
10	5 760 15	For 1 to 3 mm thick panels For 1 module Clips into a 28 x 53.5 mm aperture
10	5 760 16	For 2 modules Clips into a 58 x 53.5 mm aperture
10	5 760 13	Modular support For mounting 2-module mechanisms on symmetrical rail
10	5 754 50	Dedicated plates for trunking 1-gang plate 2 modules (supplied with support frame)
5	5 754 60	2-gang plate 2 x 2 modules (supplied with support frame)
10	5 754 70	White plate for 1-gang 13 A switched socket
5	5 754 80	White plate for 2-gang 13 A switched socket
5	5 751 90	IP 44 plate For British and German standards For mounting in 1-gang box Support frame supplied

Pack	Cat.Nos	Flush-mounting boxes
1	6 890 36	For British standard 6 and 8-module plates and frames For 6 modules 211.4 x 75.7 x 50.8 mm
1	6 890 38	For 8 modules 231 x 75.7 x 50.8 mm
1	6 890 28	For 2 x 6 modules 212 x 143 x 42 mm
1	0 818 56	For 3 x 6 modules 212 x 212 x 42 mm
10	5 723 90	Surface-mounting boxes For British, German and French standard For 2 modules - 1 gang 38 mm depth
5	5 723 92	For 4 modules 2 x 2 modules - 2 gang 48 mm depth (suitable for shaver sockets)
2	5 723 96	For 2 x 6 modules 38 mm depth

Arteor™

international support frames

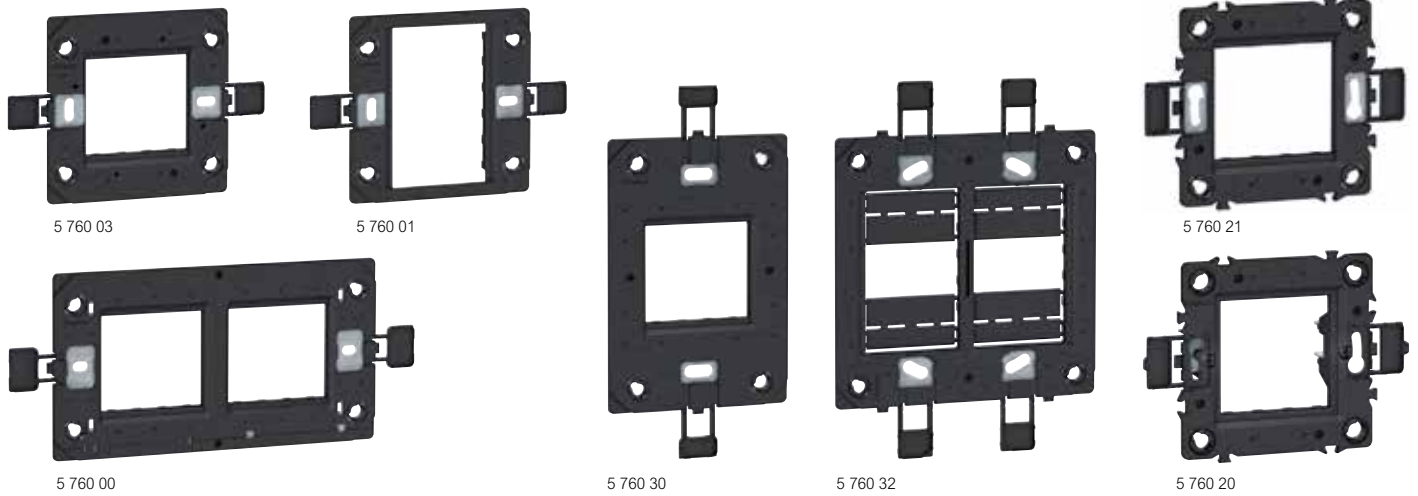

Support frame and plate selection charts p. 271-278

Pack	Cat.Nos	Support frames for BS type boxes 60.3 mm fixing centres
10	5 760 03	Screw mounting (screws supplied) For 1 gang box Square - for 1 or 2 modules
5	5 760 01	Square - for 3 modules
10	5 760 02	For 2 gang box Rectangular - for 3 modules
10	5 760 00	Rectangular - for 2 x 2 modules

Pack	Cat.Nos	Support frames for US and South African type boxes 83.5 mm fixing centres
10	5 760 30	Screw mounting For 2" x 4" boxes For 2 modules (electronic functions except 2-module mechanisms to be mounted on 3-module support frame)
10	5 760 40	For 1 to 3 modules
5	5 760 31	For 4" x 4" boxes For 2, 3 and 4 modules
5	5 760 32	For 2 x 3 modules

Pack	Cat.Nos	Support frames for German and French type boxes
10	5 760 21	Screw mounting For 1 or 2 modules
5	5 760 11	For 4 modules
5	5 760 12	For 6 modules Horizontal mounting
2	5 760 22	For 2 x 6 modules Horizontal mounting
5	5 760 20	Claw mounting For 1 or 2 modules

Pack	Cat.Nos	Support frame for Italian type boxes 83.5 mm fixing centres
10	5 760 40	Screw mounting For 1 to 3 modules

Arteor™ British standard plate selection charts

60.3 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral			Tattoo	Graphic	
				White	Pearl Alu	Graphite	Edition 1	Casual	Formal
SQUARE VERSION									
1 module	1 gang	5 760 03		5 752 00	5 752 01	5 752 02	5 761 08	5 761 01	5 761 02
2 modules and 1.2" touch screen		5 760 03 5 760 01 ⁽¹⁾		5 752 10	5 752 11	5 752 12	5 761 28	5 761 21	5 761 22
3 modules - 1 gang	1 gang	5 760 01		5 751 60	5 751 61	5 751 62	5 761 88	5 761 81	5 761 82
3 modules and shaver sockets	2 gang	5 760 02		5 750 70	5 750 71	5 750 72	5 761 68	5 761 61	5 761 62
4 modules	2 gang	5 760 00		5 750 80	5 750 81	5 750 82	5 761 48	5 761 41	5 761 42
6 modules	6 890 36	Supplied with support frame		5 753 70	5 753 71	5 753 72	5 763 78	5 763 71	5 763 72
8 modules	6 890 38	Supplied with support frame		5 767 00	5 767 01	5 767 02	5 767 18	5 767 11	5 767 12
2 x 6 modules	6 890 28	Supplied with support frame		5 753 90	5 753 91	5 753 92	-	-	-
3 x 6 modules	0 818 56	Supplied with support frame		5 754 00	5 754 01	5 754 02	-	-	-
For 5 A/13 A switched socket outlet - 1 gang	-	Not needed		5 750 90	5 750 91	5 750 92	5 762 18	5 762 11	5 762 12
For 13 A twin Switched socket outlet - 2 gang	-	Not needed		5 751 00	5 751 01	5 751 02	5 762 08	5 762 01	5 762 02
For 13 A fused connection unit switched	-	Not needed		5 751 20	5 751 21	5 751 22	5 761 98	5 761 91	5 761 92
For cooker unit Cat.No 5 720 88	-	Not needed		5 751 50	-	-	-	-	-
Blanking cover plate British standard	1 gang	5 760 03 5 760 01		5 751 30	5 751 31	5 751 32	-	-	-
Blanking cover plate British standard	2 gang	5 760 02		5 751 40	5 751 41	5 751 42	-	-	-
ROUND VERSION									
2 modules	1 gang	5 760 03		5 756 10	5 756 11	5 756 12	5 761 18	5 761 11	5 761 12
3 modules	2 gang	5 760 02		5 755 40	5 755 41	5 755 42	5 761 58	5 761 51	5 761 52
3 modules - 1 gang	1 gang	5 760 01		5 755 60	5 755 61	5 755 62	5 761 78	5 761 71	5 761 72
4 modules	2 gang	5 760 00		5 755 50	5 755 51	5 755 52	5 761 38	5 761 31	5 761 32
6 modules	6 890 36	Supplied with support		5 767 40	5 767 41	5 767 42	5 767 58	5 767 51	5 767 52
8 modules	6 890 38	Supplied with support		5 766 80	5 766 81	5 766 82	5 766 98	5 766 91	5 766 92











1: Use 5 760 01 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)












PLATES

PLATES											
Mirror				Brushed metal		Wood		Leather		Signature	
Mirror White	Mirror Black	Mirror Red	Mirror Taupe	Stainless Steel	Gold Brass	Wenge Style	Light Oak	Club	Galuchat	Woven Metal	
5 752 04	5 752 03	5 761 06	5 761 05	5 752 06	5 761 00	5 752 05	5 761 09	5 761 03	5 761 04	5 761 07	
5 752 14	5 752 13	5 761 26	5 761 25	5 752 16	5 761 20	5 752 15	5 761 29	5 761 23	5 761 24	5 761 27	
5 751 64	5 751 63	5 761 86	5 761 85	5 751 66	5 761 80	5 751 65	5 761 89	5 761 83	5 761 84	5 761 87	
5 750 74	5 750 73	5 761 66	5 761 65	5 750 76	5 761 60	5 750 75	5 761 69	5 761 63	5 761 64	5 761 67	
5 750 84	5 750 83	5 761 46	5 761 45	5 750 86	5 761 40	5 750 85	5 761 49	5 761 43	5 761 44	5 761 47	
5 753 74	5 753 73	5 763 76	5 763 75	5 753 76	5 763 70	5 753 75	5 763 79	5 763 73	5 763 74	5 763 77	
5 767 04	5 767 03	5 767 16	5 767 15	5 767 06	5 767 10	5 767 05	5 767 19	5 767 13	5 767 14	5 767 17	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
5 750 94	5 750 93	5 762 16	5 762 15	5 750 96	5 762 10	5 750 95	5 762 19	5 762 13	5 762 14	5 762 17	
5 751 04	5 751 03	5 762 06	5 762 05	5 751 06	5 762 00	5 751 05	5 762 09	5 762 03	5 762 04	5 762 07	
5 751 24	5 751 23	5 761 96	5 761 95	5 751 26	5 761 90	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
5 756 14	5 756 13	5 761 16	5 761 15	5 756 16	5 761 10	5 756 15	5 761 19	5 761 13	5 761 14	5 761 17	
5 755 44	5 755 43	5 761 56	5 761 55	5 755 46	5 761 50	5 755 45	5 761 59	5 761 53	5 761 54	5 761 57	
5 755 64	5 755 63	5 761 76	5 761 75	5 755 66	5 761 70	5 755 65	5 761 79	5 761 73	5 761 74	5 761 77	
5 755 54	5 755 53	5 761 36	5 761 35	5 755 56	-	-	-	-	-	-	
5 767 44	5 767 43	5 767 56	5 767 55	5 767 46	-	-	-	-	-	-	
5 766 84	5 766 83	5 766 96	5 766 95	5 766 86	-	-	-	-	-	-	

Arteor™ Italian / US standards plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES						
				Neutral			Tattoo	Graphic		
				White	Pearl Alu	Graphite	Edition 1	Casual	Formal	
SQUARE VERSION										
1 module	0 800 49	5 760 40		5 752 20	5 752 21	5 752 22	5 764 18	5 764 11	5 764 12	
2 modules and 1.2" touch screen	0 800 49	5 760 40		5 752 30	5 752 31	5 752 32	5 764 38	5 764 31	5 764 32	
3 modules	0 800 49	5 760 40		5 750 10	5 750 11	5 750 12	5 764 58	5 764 51	5 764 52	
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 754 11	5 754 12	-	-	-	
4 modules	0 800 42	5 760 11		5 750 30	5 750 31	5 750 32	5 762 78	5 762 71	5 762 72	
6 modules	0 800 43	5 760 12		5 750 40	5 750 41	5 750 42	5 762 88	5 762 81	5 762 82	
ROUND VERSION										
2 modules	0 800 49	5 760 40		5 756 20	5 756 21	5 756 22	5 764 28	5 764 21	5 764 22	
3 modules	0 800 49	5 760 40		5 755 00	5 755 01	5 755 02	5 764 48	5 764 41	5 764 42	
4 modules	0 800 42	2 x 5 760 21		5 755 10	5 755 11	5 755 12	5 762 58	5 762 51	5 762 52	
6 modules	0 800 43	3 x 5 760 21		5 755 20	5 755 21	5 755 22	-	-	-	

PLATES											
Mirror				Brushed metal		Wood		Leather		Signature	
Mirror White	Mirror Black	Mirror Red	Mirror Taupe	Stainless Steel	Gold Brass	Wenge Style	Light Oak	Club	Galuchat	Woven Metal	
											
5 752 44	5 752 43	5 764 16	5 764 15	5 752 46	5 764 10	5 752 45	5 764 19	5 764 13	5 764 14	5 764 17	
5 752 54	5 752 53	5 764 36	5 764 35	5 752 56	5 764 30	5 752 55	5 764 39	5 764 33	5 764 34	5 764 37	
5 752 74	5 752 73	5 764 56	5 764 55	5 752 76	5 764 50	5 752 75	5 764 59	5 764 53	5 764 54	5 764 57	
-	-	-	-	-	-	-	-	-	-	-	
5 750 34	5 750 33	5 762 76	5 762 75	5 750 36	5 762 70	5 750 35	5 762 79	-	-	-	
5 750 44	5 750 43	5 762 86	5 762 85	5 750 46	5 762 80	5 750 45	-	-	-	-	
5 756 34	5 756 33	5 764 26	5 764 25	5 756 36	5 764 20	5 756 35	5 764 29	5 764 23	5 764 24	5 764 27	
5 756 54	5 756 53	5 764 46	5 764 45	5 756 56	5 764 40	5 756 55	5 764 49	5 764 43	5 764 44	5 764 47	
5 755 14	5 755 13	5 762 56	5 762 55	5 755 16	5 762 50	-	-	-	-	-	
5 755 24	5 755 23	-	-	5 755 26	-	-	-	-	-	-	

Arteor™ American and South African standard plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES						
				Neutral			Tattoo	Graphic		
				White	Pearl Alu	Graphite	Edition 1	Casual	Formal	
SQUARE VERSION										
1 vertical module	2" x 4"	5 760 30		5 767 20	5 767 21	5 767 22	5 767 38	5 767 31	5 767 32	
1 horizontal module		5 760 40		5 752 40	5 752 41	5 752 42	5 764 18	5 764 11	5 764 12	
2 modules and 1.2" touch screen		5 760 30 ⁽¹⁾ 5 760 40		5 752 50	5 752 51	5 752 52	5 764 38	5 764 31	5 764 32	
3 modules		5 760 40		5 752 70	5 752 71	5 752 72	5 764 58	5 764 51	5 764 52	
2 modules	4" x 4"	5 760 31		5 752 60	5 752 61	5 752 62	5 766 28	5 766 21	5 766 22	
3 modules		5 760 31		5 752 80	5 752 81	5 752 82	5 766 48	5 766 41	5 766 42	
4 modules		5 760 31		5 752 90	5 752 91	5 752 92	5 766 58	5 766 51	5 766 52	
2 x 3 modules		5 760 32		5 753 00	5 753 01	5 753 02	5 766 78	5 766 71	5 766 72	
Video display internal unit 2.5"		Not needed		-	-	-	-	-	-	
Blanking cover plate Italian / US standards	2" x 4"	5 760 40		5 754 10	5 754 11	5 754 12	-	-	-	
Blanking cover plate US standard	4" x 4"	5 760 31		5 753 60	5 753 61	5 753 62	-	-	-	
Central unit for: - temperature control - intruder alarm	Supplied with box	Not needed		-	-	-	-	-	-	
ROUND VERSION										
2 modules	2" x 4"	5 760 30 ⁽¹⁾ 5 760 40		5 756 30	5 756 31	5 756 32	5 764 28	5 764 21	5 764 22	
3 modules		5 760 40		5 756 50	5 756 51	5 756 52	5 764 48	5 764 41	5 764 42	
2 modules	4" x 4"	5 760 31		5 756 40	5 756 41	5 756 42	5 766 18	5 766 11	5 766 12	
3 modules				5 756 60	5 756 61	5 756 62	5 766 38	5 766 31	5 766 32	
2 x 3 modules		5 760 32		5 756 70	5 756 71	5 756 72	5 766 68	5 766 62	5 766 61	

1: Only for 2 modules electronic functions

PLATES

PLATES											
Mirror				Brushed metal		Wood		Leather		Signature	
Mirror White	Mirror Black	Mirror Red	Mirror Taupe	Stainless Steel	Gold Brass	Wenge Style	Light Oak	Club	Galuchat	Woven Metal	
5 767 24	5 767 23	5 767 36	5 767 35	5 767 26	5 767 30	5 767 25	5 767 39	5 767 33	5 767 34	5 767 37	
5 752 44	5 752 43	5 764 16	5 764 15	5 752 46	5 764 10	5 752 45	5 764 19	5 764 13	5 764 14	5 764 17	
5 752 54	5 752 53	5 764 36	5 764 35	5 752 56	5 764 30	5 752 55	5 764 39	5 764 33	5 764 34	5 764 37	
5 752 74	5 752 73	5 764 56	5 764 55	5 752 76	5 764 50	5 752 75	5 764 59	5 764 53	5 764 54	5 764 57	
5 752 64	5 752 63	5 766 26	5 766 25	5 752 66	5 766 20	5 752 65	5 766 29	5 766 23	5 766 24	5 766 27	
5 752 84	5 752 83	5 766 46	5 766 45	5 752 86	5 766 40	5 752 85	5 766 49	5 766 43	5 766 44	5 766 47	
5 752 94	5 752 93	5 766 56	5 766 55	5 752 96	-	-	-	-	-	-	
5 753 04	5 753 03	5 766 76	5 766 75	5 753 06	5 766 70	-	-	-	-	-	
5 764 84	5 764 83	-	-	5 764 86	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
5 765 24	5 765 23	-	-	-	-	-	-	-	-	-	
5 756 34	5 756 33	5 764 26	5 764 25	5 756 36	5 764 20	5 756 35	5 764 29	5 764 23	5 764 24	5 764 27	
5 756 54	5 756 53	5 764 46	5 764 45	5 756 56	5 764 40	5 756 55	5 764 49	5 764 43	5 764 44	5 764 47	
5 756 44	5 756 43	5 766 16	5 766 15	5 756 46	5 766 10	5 756 45	5 766 19	5 766 13	5 766 14	5 766 17	
5 756 64	5 756 63	5 766 36	5 766 35	5 756 66	5 766 30	5 756 65	5 766 39	5 766 33	5 766 34	5 766 37	
5 756 74	5 756 73	5 766 66	5 766 65	5 756 76	-	-	-	-	-	-	

Arteor™ German and French standard plate selection charts

60 mm fixing centres - flush and surface-mounting boxes, support frames and plates

Number of modules per mechanism	Surface-mounting boxes	Flush-mounting boxes for dry partitions ⁽¹⁾	Support frames	Plates	PLATES					
					Neutral			Tattoo	Graphic	
					White	Pearl Alu	Graphite	Edition 1	Casual	Formal
SQUARE VERSION										
1 module	-	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 40	5 765 41	5 765 52	5 762 28	5 762 21	5 762 22
2 modules and 1.2" touch screen	5 723 90	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 60	5 765 61	5 765 62	5 762 48	5 762 41	5 762 42
3 modules	-	0 800 49	5 760 40		5 750 10	5 750 11	5 750 12	5 764 58	5 764 51	5 764 52
2 x 2 modules	5 723 92	0 800 42	2 x 5 760 21		5 750 20	5 750 21	5 750 22	5 762 68	5 762 61	5 762 62
6 modules	-	0 800 43	5 760 12		5 750 40	5 750 41	5 750 42	5 762 88	5 762 81	5 762 82
2 x 6 modules	5 723 96	0 801 26	5 760 22		5 750 60	5 750 61	5 750 62	-	-	-
4 modules	5 723 92	0 800 42	5 760 11		5 750 30	5 750 31	5 750 32	5 762 78	5 762 71	5 762 72
3 x 2 modules	-	0 800 43	3 x 5 760 21		5 750 50	5 750 51	5 750 52	-	-	-
ROUND VERSION										
2 x 1 module 2 modules	5 723 90	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 756 00	5 756 01	5 756 02	5 762 38	5 762 31	5 762 32
2 x 2 modules	5 723 92	0 800 42	2 x 5 760 21		5 755 10	5 755 11	5 755 12	5 762 58	5 762 51	5 762 52
3 x 2 modules	-	0 800 43	3 x 5 760 21		5 755 20	5 755 21	5 755 22	-	-	-

1: Other flush-mounting boxes (see p. 565)

PLATES

PLATES											
Mirror				Brushed metal		Wood		Leather		Signature	
Mirror White	Mirror Black	Mirror Red	Mirror Taupe	Stainless Steel	Gold Brass	Wenge Style	Light Oak	Club	Galuchat	Woven Metal	
5 765 54	5 765 53	5 762 26	5 762 25	5 765 56	5 762 20	5 765 55	5 762 29	5 762 23	5 762 24	5 762 27	
5 765 64	5 765 63	5 762 46	5 762 45	5 765 66	5 762 40	5 765 65	5 762 49	5 762 43	5 762 44	5 762 47	
5 752 74	5 752 73	5 764 56	5 764 55	5 752 76	5 764 50	5 752 75	5 764 59	5 764 53	5 764 54	5 764 57	
5 750 24	5 750 23	5 762 66	5 762 65	5 750 26	5 762 60	5 750 25	5 762 69	5 762 63	5 762 64	5 762 67	
5 750 44	5 750 43	5 762 86	5 762 85	5 750 46	5 762 80	5 750 45	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
5 750 34	5 750 33	5 762 76	5 762 75	5 750 36	5 762 70	5 750 35	5 762 79	-	-	-	
5 750 54	5 750 53	-	-	5 750 56	-	-	-	-	-	-	
5 756 04	5 756 03	5 762 36	5 762 35	5 756 06	5 762 30	5 756 05	5 762 39	5 762 33	5 762 34	5 762 37	
5 755 14	5 755 13	5 762 56	5 762 55	5 755 16	5 762 50	5 755 15	5 762 59	-	-	5 762 57	
5 755 24	5 755 23	-	-	5 755 26	-	-	-	-	-	-	

Arteor™ hotels solutions

From the entrance of the hotel room to the bedside table Arteor™ solutions are designed to perfectly meet customer comfort requirements for easy connection of various multimedia devices and flexible access to the internet

DESIGNED TO ENHANCE CUSTOMER COMFORT

■ A solution for all types of hotels



BUS/SCS SCENARIO CONTROLLERS AND CONTROLS



HOTEL EQUIPMENT WITH SPECIFIC MARKING



STANDARD HOTEL EQUIPMENT

Arteor™ hotel equipment

BUS/SCS



Support frame and plate selection charts **p. 271-278**

Pack	Cat.Nos	Control indicators for room management
		Mechanisms To be equipped with support frames (p. 270) and plates (p. 271 to 278)
1	N 0 675 90	External indicator and bell pushbutton DO NOT DISTURB – MAKE UP THE ROOM
1	0 675 91	External indicator and bell pushbutton + badge reader DO NOT DISTURB – MAKE UP THE ROOM
1	0 675 93	To be completed with key covers DO NOT DISTURB – MAKE UP THE ROOM
1	0 675 92	8 push-buttons control for lighting, automation, sound diffusion and scenario functions
		A5 sheets For the customisation of the symbols of Cat.No 0 675 92
1	3541	○ White
1	3542	● Magnesium
		Key cover with symbols for control mechanism BUS/SCS
		Key cover with symbol DO NOT DISTURB - 2 modules
5	N 5 743 46	○ White
5	5 743 47	● Magnesium
5	5 743 48	○ White
5	5 743 49	● Magnesium
		Couple of key cover with symbol DO NOT DISTURB and symbol PLEASE CLEAN THE ROOM
2	5 743 94	○ White
2	5 743 95	● Magnesium
2	5 743 96	○ White
2	5 743 97	● Magnesium
		Display thermostat
1	N 0 674 59	Flush mounted thermostat with backlit display. To be equipped with support frames (p. 270) and plates (p. 271 to 278) It can be used to control the temperature of an individual zone, both if a temperature central unit is and is not present. It features a temperature probe and an input for the connection of a contact line (e.g. window contact). It can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules

Pack	Cat.Nos	Keycard switches BUS/SCS
		Equipped with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278) For energizing a circuit by inserting a key fob Time delay of approx. 30 sec. after card removal Lighting of the slot by LED 2 modules
		Mechanical keycard switch
1	5 722 35	○ White
1	5 727 35	● Magnesium
		RFID keycard switch Only works with ISO 13.56 MHz badges
1	5 722 36	○ White
1	5 727 36	● Magnesium
		Scenario controllers BUS/SCS
		Touch control plates, supplied complete, to be installed in flush-mounting boxes
		4-scene touch control - 4 scenarios "wake up / sleep / TV / relax" scenarios - 2 modules For BS flush-mounting boxes
1	5 740 89	○ White
1	5 745 89	● Black
		6-scene touch control - 6 scenarios "wake up / sleep / TV / relax / open curtains / close curtains" scenarios - 3 modules For British, Italian and American flush-mounting boxes
1	5 740 91	○ White
1	5 745 91	● Black
		Accessories
		Sheet with stickers with symbols for different scenarios for hotel rooms
1	5 740 92	Dark colour
1	5 745 92	White colour

Arteor™ hotel equipment

BUS/SCS (continued)



F430R8



F430V10



F430/2



F430/4

Pack	Cat.Nos	DIN rail actuators 100/240 VA - 50/60 Hz	Pack	Cat.Nos	IP scenario module
1	F430R8 N	Actuator with 8 independent relays For the control of on-off valves, motorised valves (open-close and three points), pumps and fan coils with 2 and 4 tubes – 4A resistive, 1A motor valves, pumps and fan-coils 4 DIN modules	1	MH201	It manages scenarios related to hotel rooms (With basic time and logic conditions) - It works as a gateway for the Configuration software
1	F430R3V10 N	Actuator with 3 independent relays and 2 x 0-10 Volts outputs For the control of fan coils with 2 and 4 tubes with proportional 0-10 Volt valves – 4A resistive, 1A fan coil 4 DIN modules	1	3544SW 3546SW	Software Software for the monitoring of the status of the room, for the corresponding basic management and the programming of badges For hotels with up to 20 rooms For hotels over 20 rooms
1	F430V10 N	Actuator with 2 x 0-10 Volt outputs For the control of 0-10 proportional valves 2 DIN modules	10	0 675 89	Badge Credit card shaped badge (ISO 50 x 80 mm) It uses transponder technology with frequency 13.56 MHz To be used with programmer Cat.BNo BT-348402 The badge can be customized and is sold in packs of 10
1	F430/2	Actuator with 2 independent relays For single and double loads: 6 A resistive, 3 A motorised valves and pumps 2 DIN modules 17.5 mm	1	BT-348402	Programmer Desk device to be connected to the PC (in the reception) to program badges
1	F430/4	Actuator with 4 independent relays For single, double or mixed loads: 6 A resistive, 3 A motorised valves, pumps and fan-coils 2 DIN modules 17.5 mm			

Arteor™ hotel equipment

wiring devices



Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Mechanical key card switches
1	5 722 30	<p>For energizing a circuit by inserting a key fob (Cat.No 5 722 59 or a smart card (access card for a hotel room) Example of use: hotel room power supply only when guest is present Time-delay of approx. 30 sec. after card removal To be equipped with single pole latching relay Cat.Nos 5 722 27 or 5 727 27 (p. 250) 2 modules</p> <p>Key card switches 230 V</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 727 30	
1	5 722 31	<p>Key card switches 12-24 V</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 734 93	
1	5 722 53	<p>Key card switches RFID</p> <p>For energizing a circuit for example meeting room, office, hotel room... Works only with ISO type contactless key card Cat.Nos 0 767 11/12/13 or other ISO type 13.56 MHz key card Time-delay of approx. 30 sec. after card removal Low capacity contact 230 V - 30 VA Lighting of the slot by LED 2 modules</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 727 53	

Pack	Cat.Nos	Key card
10	5 722 59	<p>For mechanical key card switches</p> <p>Enables use of key fob switches in hotels with key locks Supplied complete with a label holder for individual hotel identification</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
10	5 727 59	
10	0 767 11	<p>For RFID key card switches</p> <p>MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory</p>

Pack	Cat.Nos	Shaver sockets
1	5 721 55	<p>Conform to BS EN 61558-2-5 IP 24 For use with European, British, American, Australian 2-pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer To be equipped with BS 2 gang - 3-module plates (p. 271, 272) For flush-mounting boxes, use BS 2 gang box depth 48 mm, US type, Italian type boxes depth 48 mm or Cat.No 0 801 55 Power supply: 230 V - 50/60 Hz 3 modules</p> <p>230 V / 120-230 V</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 726 55	
1	5 721 53	<p>230 V / 120-230 V with earth connector</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 726 53	

Pack	Cat.Nos	Chimes
1	5 722 06	<p>230 V - 50 Hz Consumption: 65 mA 1 melody Tone level: 73 dB at 1 m Compatible with push-button Cat.No 0 416 45</p> <p><input type="radio"/> White <input checked="" type="radio"/> Magnesium</p>
1	5 722 46	



5 733 82



5 737 22



5 720 57



5 725 54



5 722 24

Support frame and plate selection charts **p. 271-278**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Lighting control
10	5 732 84	Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF ○ White ● Magnesium
10	5 737 84	
10	5 732 86	Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF ○ White ● Magnesium
10	5 737 86	
10	5 732 94	Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ ○ White ● Magnesium
5	5 737 94	
10	5 732 96	Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ ○ White ● Magnesium
5	5 737 96	
10	5 733 82	Switch for desk and entrance lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ ○ White ● Magnesium
5	5 738 82	
10	5 733 84	Push-button for desk and entrance lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ ○ White ● Magnesium
5	5 738 84	
Electric roller blinds control - 250 VA		
10	5 732 22	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) ○ White ● Magnesium
10	5 737 22	
10	5 732 24	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) ○ White ● Magnesium
10	5 737 24	
Curtain control - 250 VA		
10	5 732 34	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) ○ White ● Magnesium
10	5 737 34	
10	5 732 36	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) ○ White ● Magnesium
10	5 737 36	

Pack	Cat.Nos	Hotel bedroom call indicators
Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module		
5	5 720 57	Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED ○ White ● Magnesium
5	5 725 57	
5	5 720 54	Internal control unit Allows the user to select the desired setting Supplied with LED ○ White ● Magnesium
5	5 725 54	
Illuminated signs		
Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper) 2 modules		
Green or red LEDs		
Sign with 2-state LEDs with choice of green or red configurable on the mechanism Power level: 1 W		
5	5 722 24	○ White ● Magnesium
5	5 727 24	
Blue LEDs		
Sign with blue LEDs A choice of 2 power levels: 0.2 or 1 W		
5	5 722 25	○ White ● Magnesium
5	5 727 22	
Buzzers		
10	5 722 04	230 V - 1 module ○ White ● Magnesium
5	5 727 04	
10	5 722 07	230 V - 2 modules ○ White ● Magnesium
10	5 722 47	
10	5 722 45	8 V - 2 modules ● Magnesium

Shaver sockets and key card switches, **p. 282**



Arteor™ hotel equipment

round version



5 732 95



5 737 35



5 725 67



5 725 74

Support frame and plate selection charts p. 271-278

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 270) and plates (p. 271 to 278)

Pack	Cat.Nos	Lighting control
10	5 732 85	Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF ○ White ● Magnesium
10	5 737 85	
10	5 732 87	Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF ○ White ● Magnesium
10	5 737 87	
5	5 732 95	Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ ○ White ● Magnesium
5	5 737 95	
5	5 732 97	Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ ○ White ● Magnesium
5	5 737 97	
5	5 733 83	Switch for desk and entrance lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ ○ White ● Magnesium
5	5 738 83	
5	5 733 85	Push-button for desk and entrance lights 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ ○ White ● Magnesium
5	5 738 85	
		Electric roller blinds control - 250 VA
10	5 732 23	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) ○ White ● Magnesium
10	5 737 23	
10	5 732 25	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) ○ White ● Magnesium
10	5 737 25	
		Curtain control - 250 VA
10	5 732 35	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) ○ White ● Magnesium
10	5 737 35	
10	5 732 37	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) ○ White ● Magnesium
10	5 737 37	

Pack	Cat.Nos	Hotel bedroom call indicators
		Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
5	5 720 67	Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED ○ White ● Magnesium
5	5 725 67	
5	5 720 74	Internal control unit Allows the user to select the desired setting Supplied with LED ○ White ● Magnesium
5	5 725 74	
		Illuminated signs
		Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper) 2 modules
5	5 727 25	Green or red LEDs Sign with 2-state LEDs with choice of green or red configurable on the mechanism 1-way ● Magnesium
5	5 727 23	Blue LEDs Sign with blue LEDs A choice of 2 power levels: 0.2 or 1 W ● Magnesium
		Buzzers
10	5 722 08	230 V - 2 modules ○ White ● Magnesium
10	5 722 48	
1	5 732 05	8 V - 2 modules ○ White ● Magnesium
1	5 732 45	

RJ 45 and audio/video sockets, p. 258 to 267

