

Trimless recessed luminaire features single halogen MR-16 module with 355° rotation and 0°-18° tilt angle to maximize lighting range.
General/Accent lighting for concrete ceiling to provide general/accent illumination e.g. residences, commercial and patios.

GLOS CAMPER HIDE RECESSED CEILING LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	MR-16 (QR-CBC51) 12V 50W; GU5.3
IP:	IP 20; Indoor
Material:	Aluminum
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL


Optics:	-
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL


Gear:	Electronic transformer
Voltage(V):	220-240
Rated current:	12V
Dimming:	-

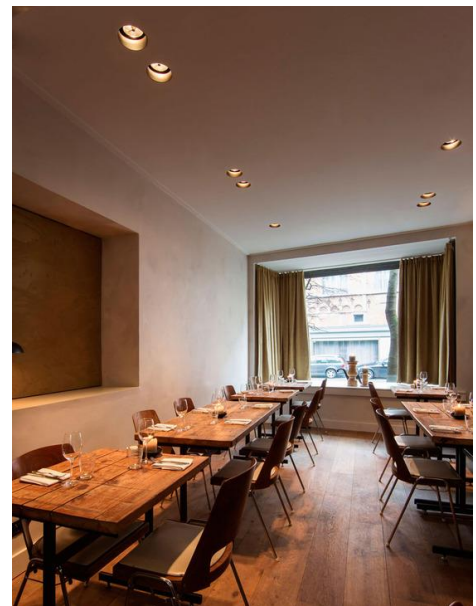


MOUNTING KIT



Material: Aluminum



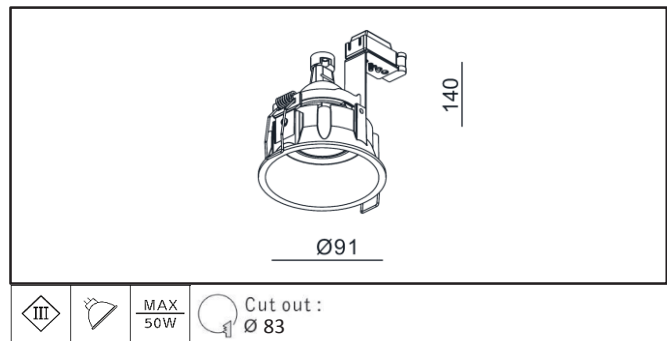

A recessed luminaire features single halogen MR-16 module with ultra-thin frame, 355° rotation and 0°-18° tilt angle to maximize lighting range .
General/Accent lighting for concrete ceiling to provide general/accent illumination e.g. residences, commercial and patios.

GLOS CAMPER RECESSED CEILING LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	MR-16 (QR-CBC51) 12V 50W; GU5.3
IP:	IP 20; Indoor
Material:	Aluminum
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV


OPTICAL

Optics:	-
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic transformer
Voltage(V):	220-240
Rated current:	12V
Dimming:	-

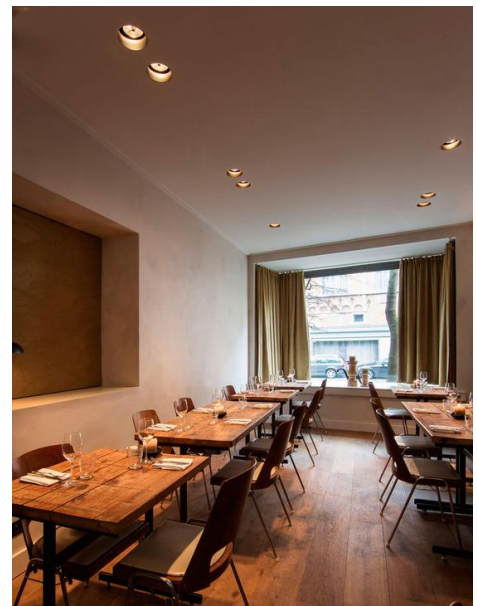

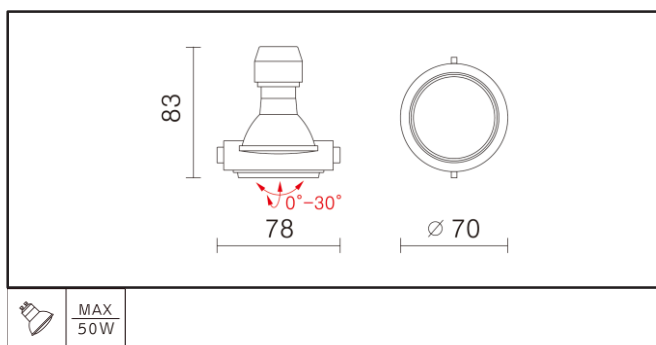

Halogen GU-10 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for restaurant, coffeehouse, dining room, bar or other commercial applications.

GLOS CHRISTO-I/GU-10 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	GU-10 (QPAR16) 50W GU10
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	-
Voltage(V):	220-240
Input current:	12V
Dimming:	-

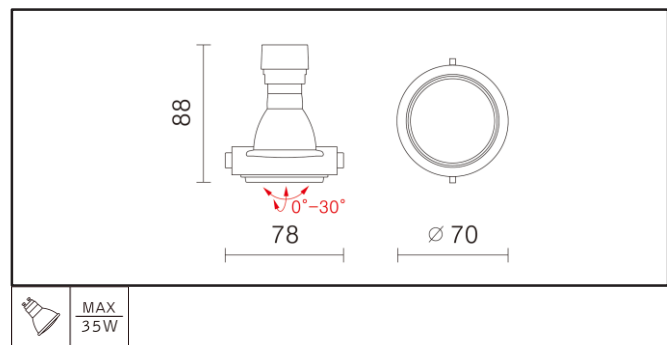

Metal halide GX-10 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for restaurant, coffeehouse, dining room, bar or other commercial applications.

GLOS CHRISTO-I/GX-10 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	CMH 20/35 MR16(QPAR63) 35W GX10 (GE) CDM-R mini(QPAR63) 35W GX10 (Philips)
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

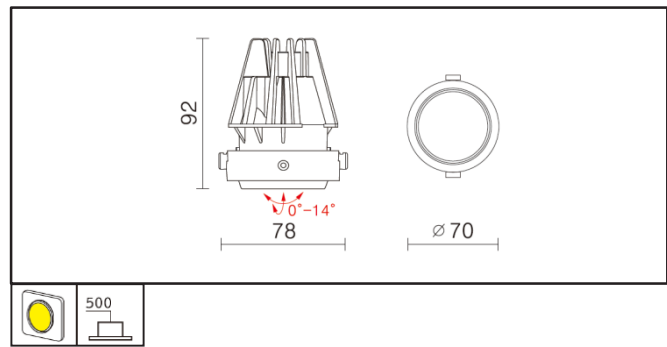

SHARP ZENIGATA CoB LED lamp with spot and flood smooth light distribution reflectors is perfect for highlighting artworks. 0°-15° tilt angle to maximize the lighting range and anti-dazzle design creates a visual comfort efficiently and high performance.

Accent lighting for museums, exhibitions, art galleries, showrooms, and commercial applications.

GLOS CHRISTO-I/HA-770C RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1100lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Steel; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	10/20/50
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	Yes (optional)

PHOTOMETRIC

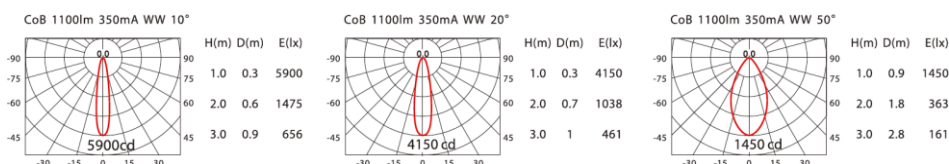

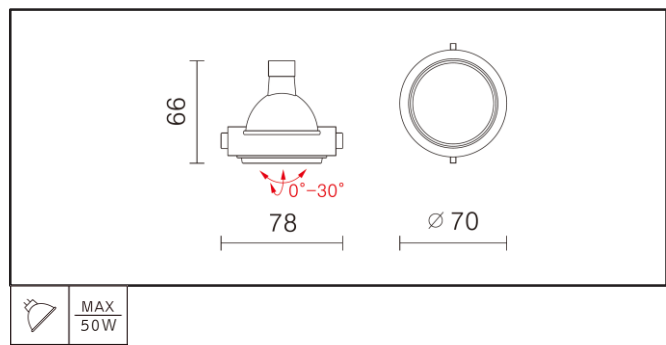

Halogen MR-16 (QR-CBC51) lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-1/MR-16 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	MR-16 (QR-CBC51) 12V 50W; GU5.3
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	□ WH ■ BK ■ SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic transformer
Voltage(V):	220-240
Input current:	12V
Dimming:	-

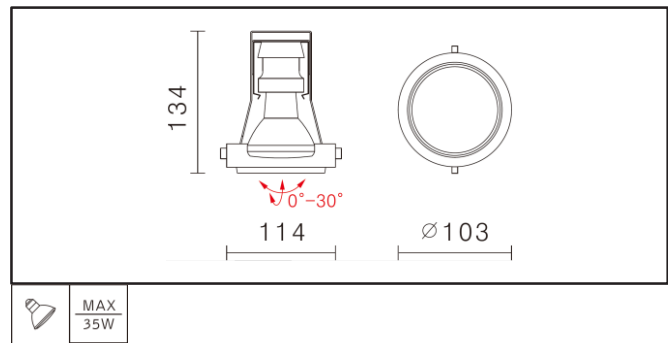

Metal halide CDM-R lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-2/CDM-R RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	CDM-R PAR20 (HIPAR20) 35W 5KV, E27
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

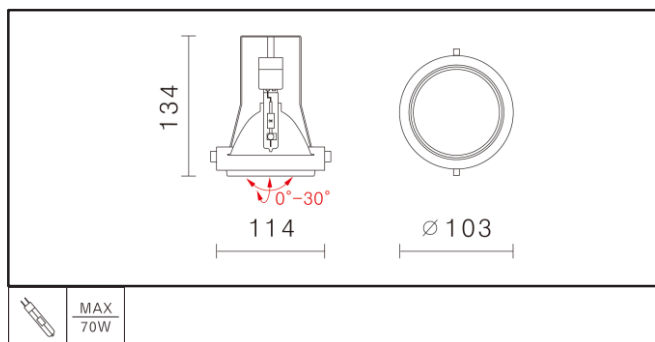

Metal halide G8.5 lamp-holder compliant with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-2/68.5 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	CDM-TC (HIT-TC) 35W/70W G8.5
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV


OPTICAL


Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

PHOTOMETRIC

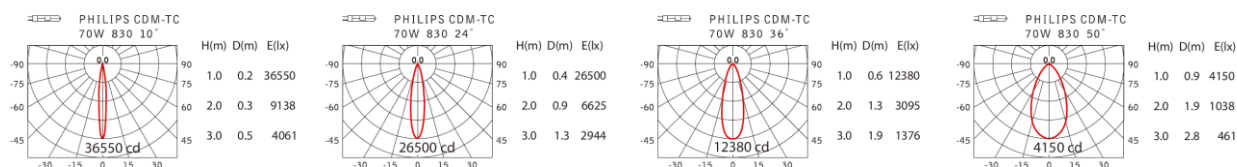

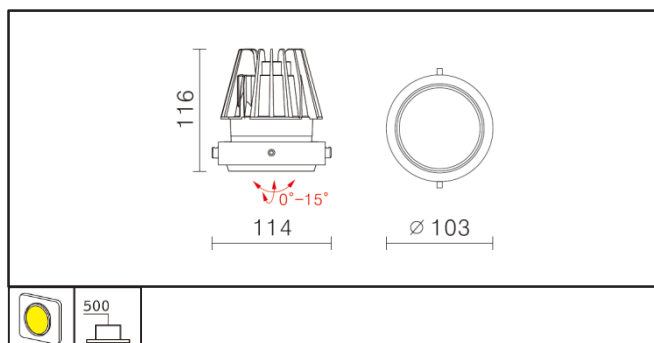

SHARP ZENIGATA CoB LED lamp with spot and flood smooth light distribution reflectors is perfect for highlighting artworks. 0°-15° tilt angle to maximize the lighting range and anti-dazzle design creates a visual comfort efficiently and high performance.

Accent lighting for museums, exhibitions, art galleries, showrooms, and commercial applications.

GLOS CHRISTO-2/HA-750C RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 25W (700mA)/2800lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Steel; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL


Optics:	Reflector
Beam angle:	10/20/40/70
Distribution:	Symmetrical




ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	Yes (optional)

PHOTOMETRIC

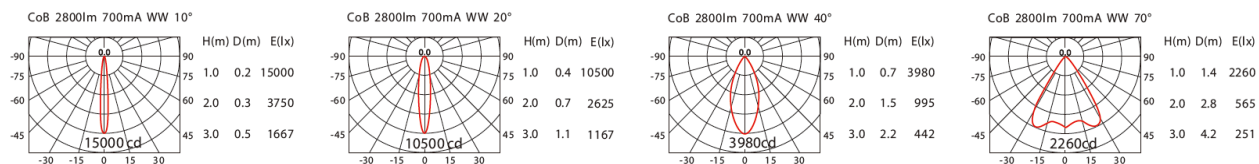

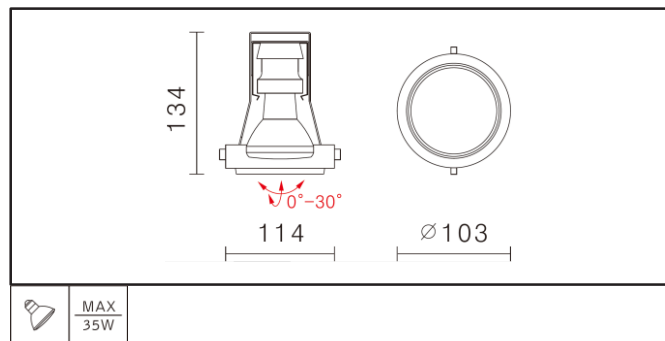

Halogen PAR-20 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-2/PAR-20 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	PAR-20 (QPAR20) 50W E27
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	□ WH ■ BK ■ SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic transformer
Voltage(V):	220-240
Input current:	-
Dimming:	-

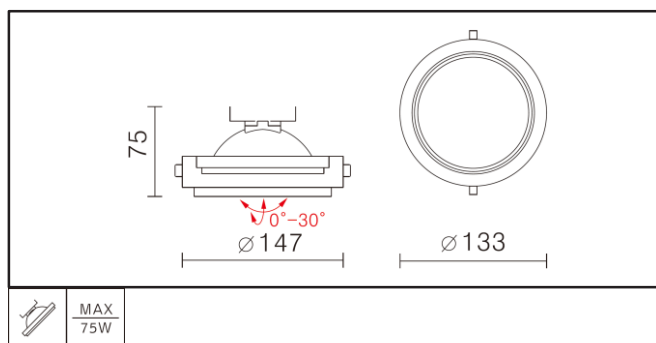

Halogen AR-III lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/AR-III RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	ARIII (QR-LPIII) 50W/75W G53
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic transformer
Voltage(V):	220-240
Input current:	-
Dimming:	-

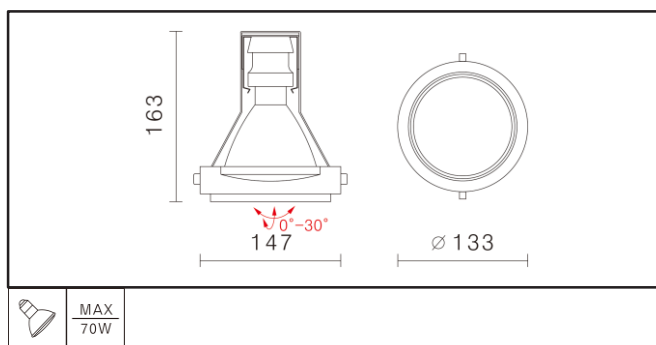

Metal halide CDM-R lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/CDM-R RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	CDM-R PAR30 (HIPAR30) 35W/70W 5KV E27
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

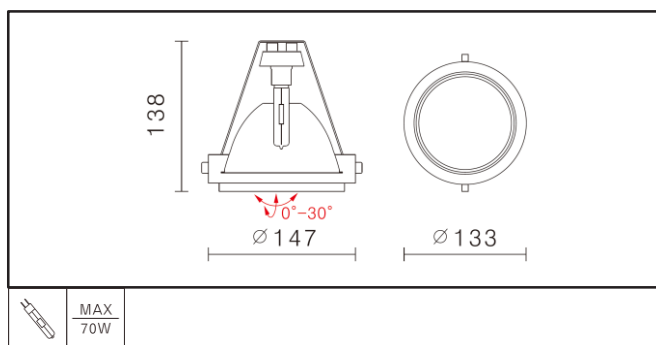

Metal halide G8.5 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/68.5 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	CDM-TC (HIT-TC) 35W/70W G8.5
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	□ WH ■ BK ■ SV


OPTICAL


Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

PHOTOMETRIC

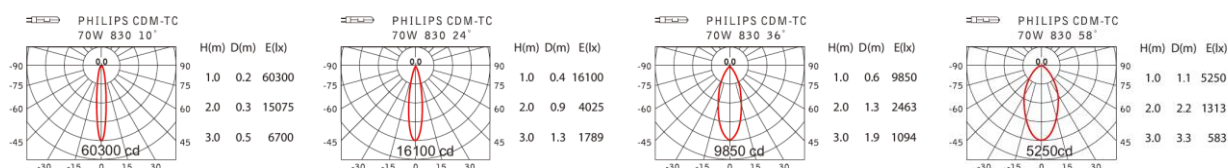

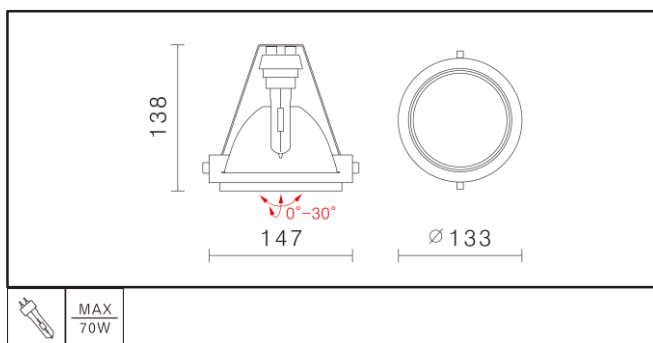

Metal halide G12 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/G12 RECESSED LUMINAIRE

Mounting: Recessed Ceiling

Lamp: CDM-T (HIT-T) 35W/70W G12

IP: IP 20; Indoor

Material: Gimbal: die-cast aluminum, powder-coated

Anti-glare baffle: plastic, black

Color: ☐ WH ☒ BK ☐ SV

OPTICAL

Optics: Reflector

Beam angle: (Subject to lamp-source)

Distribution: Symmetrical

ELECTRICAL


Gear: Electronic gear


Voltage(V): 220-240

Input current: -

Dimming: -

PHOTOMETRIC

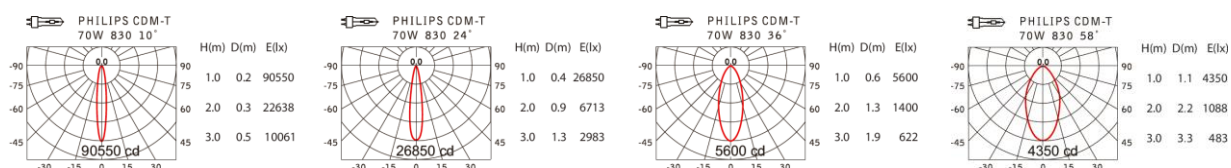

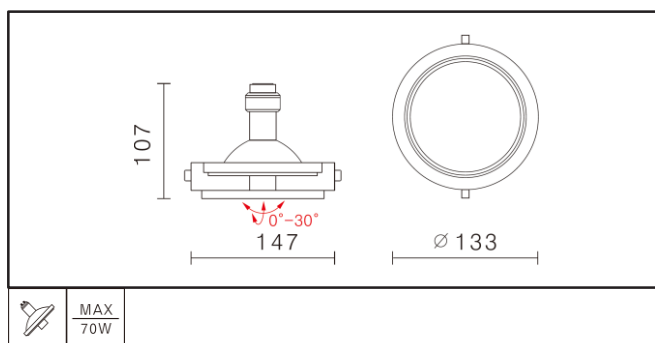

Metal halide GX8.5 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/GX8.5 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	CDM-R/III (HIPAR/III) 35W/70W GX8.5
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic gear
Voltage(V):	220-240
Input current:	-
Dimming:	-

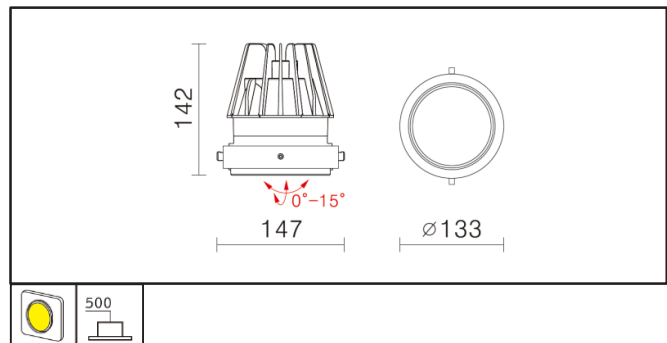

SHARP ZENIGATA CoB LED lamp with spot and flood smooth light distribution reflectors is perfect for highlighting artworks. 0°-15° tilt angle to maximize the lighting range and anti-dazzle design creates a visual comfort efficiently and high performance.

Accent lighting for museums, exhibitions, art galleries, showrooms, and commercial applications.

GLOS CHRISTO-3/HA-720C RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 32W (900mA)/3600lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Steel; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL


Optics:	Reflector
Beam angle:	12/20/40/70
Distribution:	Symmetrical




ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	900mA
Dimming:	1-10V or DALI (optional)

PHOTOMETRIC

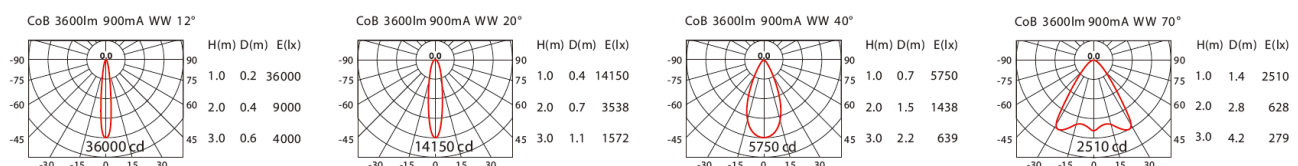

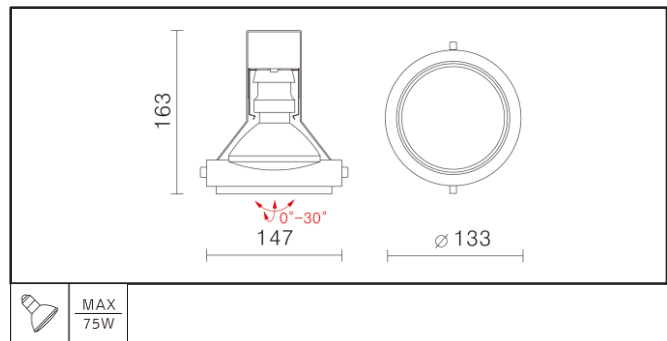

Halogen PAR-30 lamp-holder compliment with a wide range of housing fittings.

Easy installation with 0°-30° tilt angle to maximize the lighting range. Complete with anti-glare front baffle for effective glare protection.

Accent lighting for museums, exhibitions, art galleries, showrooms and commercial applications.

GLOS CHRISTO-3/PAR-30 RECESSED LUMINAIRE


Mounting:	Recessed Ceiling
Lamp:	PAR30 (QPAR30) 75W E27
IP:	IP 20; Indoor
Material:	Gimbal: die-cast aluminum, powder-coated Anti-glare baffle: plastic, black
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV

OPTICAL

Optics:	Reflector
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	Electronic transformer
Voltage(V):	220-240
Input current:	-
Dimming:	-

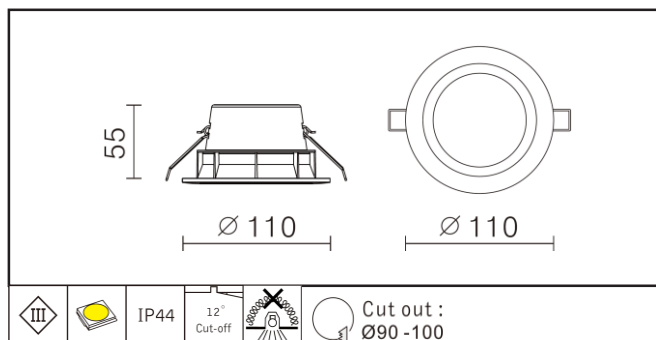

A highly economical recessed luminaire features OSRAM DURIS LED providing efficient energy-saving and low maintenance cost, perfect for PLC fluorescent replacement in home and commercial applications. With good thermal management solution and deep cut-off angle, it ensures long life time cycle and good glaring control.

With excellent flexibility of replacement downlights of cut-hole size 90 - 100mm.


General lighting for low ceilings in hotel, restaurants and home. Good replacement for most traditional CFL lighting fixtures.

GLOS ECON ROUND-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	OSRAM DURIS LED 7W (350mA)/10W (500mA)
Lumen:	800lm (350mA)/1000lm (500mA)
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	SABIC plastic
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL


Optics:	Diffuser
Beam angle:	75°
Distribution:	Symmetrical

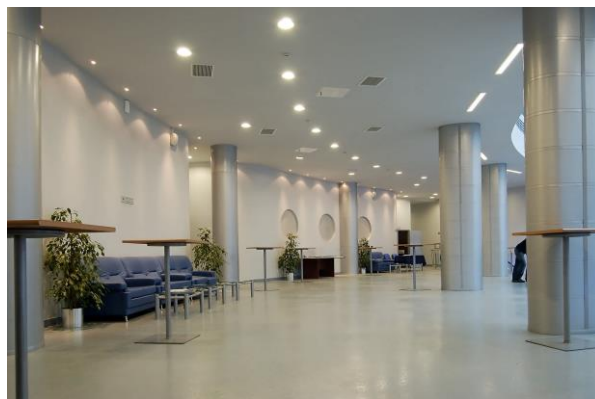


ELECTRICAL

Gear:	LED Driver
Rated current:	350mA/500mA
Dimming:	Yes (optional)

PHOTOMETRIC

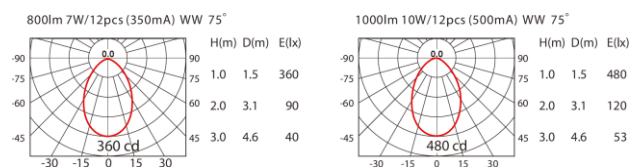

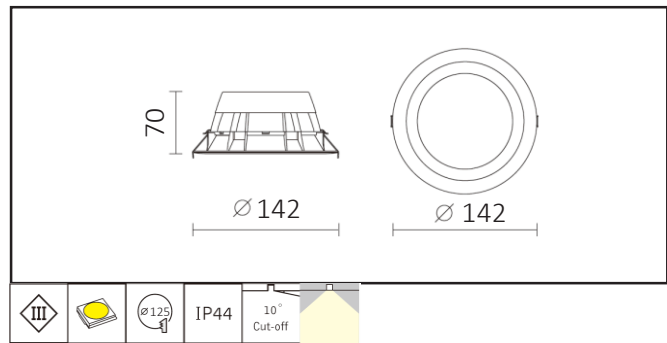

A highly economical recessed luminaire features OSRAM DURIS LED providing efficient energy-saving and low maintenance cost, perfect for PLC fluorescent replacement in home and commercial applications. With good thermal management solution and deep cut-off angle, it ensures long life time cycle and good glaring control.

General lighting for low ceilings in hotel, restaurants and home. Good replacement for most traditional CFL lighting fixtures.

GLOS ECON ROUND-2 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	OSRAM DURIS LED 12W (350mA) 1200lm/ 17W (500mA) 1700lm
Lumen:	1200lm (350mA)/ 1700lm (500mA)
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	SABIC plastic
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL


Optics:	Diffuser
Beam angle:	80
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Rated current:	350mA/500mA
Dimming:	Yes (optional)

PHOTOMETRIC



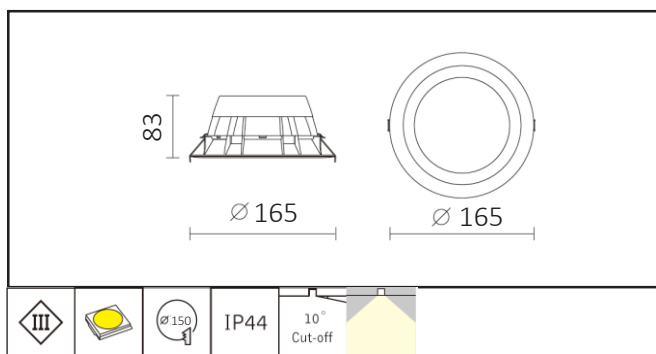

A highly economical recessed luminaire features OSRAM DURIS LED providing efficient energy-saving and low maintenance cost, perfect for PLC fluorescent replacement in home and commercial applications. With good thermal management solution and deep cut-off angle, it ensures long life time cycle and good glaring control.

General lighting for low ceilings in hotel, restaurants and home. Good replacement for most traditional CFL lighting fixtures.

GLOS ECON ROUND-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	OSRAM DURIS LED 12W (350mA)/ 17W (500mA)
Lumen:	1200lm (350mA)/ 1700lm (500mA)
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	SABIC plastic
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW




OPTICAL


Optics:	Diffuser
Beam angle:	80
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Rated current:	350mA/500mA
Dimming:	Yes (optional)

PHOTOMETRIC

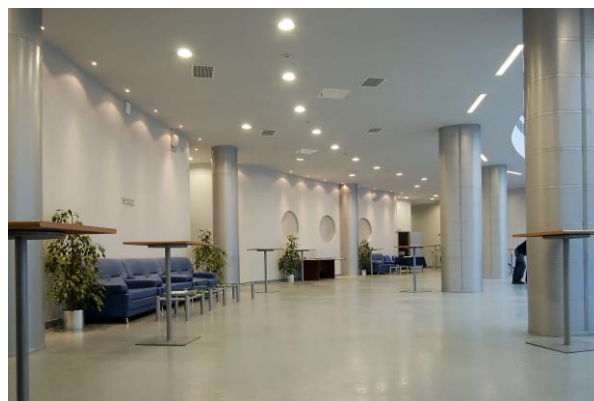

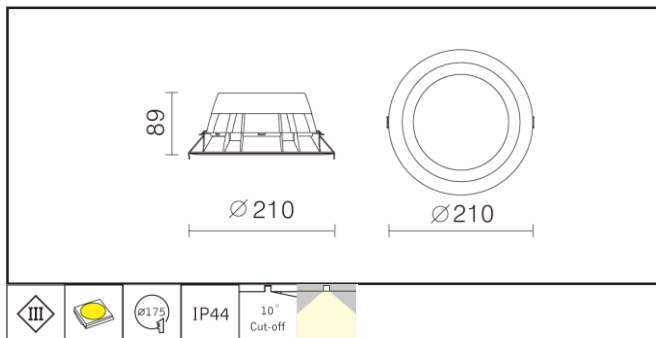

A highly economical recessed luminaire features OSRAM DURIS LED providing efficient energy-saving and low maintenance cost, perfect for PLC fluorescent replacement in home and commercial applications. With good thermal management solution and deep cut-off angle, it ensures long life time cycle and good glaring control.

With excellent flexibility of replacement downlights of cut-hole size 175 – 200mm.


General lighting for low ceilings in hotel, restaurants and home. Good replacement for most traditional CFL lighting fixtures.

GLOS ECON ROUND-4 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	OSRAM DURIS LED 14W (350mA)/ 20W (500mA)/ 28W (700mA)
Lumen:	1500lm (350mA)/2100lm (500mA)/2700lm (700mA)
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	SABIC plastic
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input checked="" type="checkbox"/> WW <input type="checkbox"/> NW

OPTICAL


Optics:	Diffuser
Beam angle:	80
Distribution:	Symmetrical

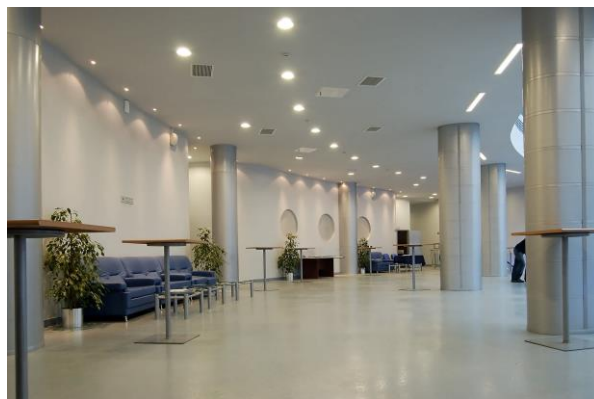


ELECTRICAL

Gear:	LED Driver
Rated current:	350mA/500mA/700mA
Dimming:	Yes (optional)

PHOTOMETRIC

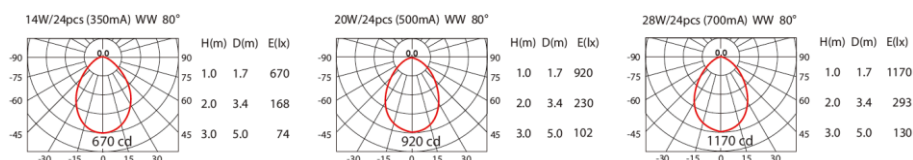

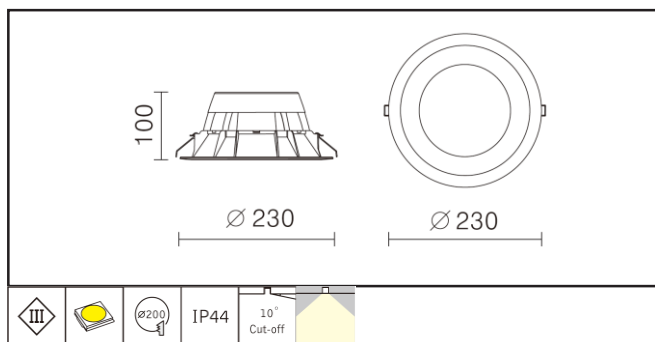

A highly economical recessed luminaire features OSRAM DURIS LED providing efficient energy-saving and low maintenance cost, perfect for PLC fluorescent replacement in home and commercial applications. With good thermal management solution and deep cut-off angle, it ensures long life time cycle and good glaring control.

With excellent flexibility of replacement downlights of cut-hole size 175 – 200mm.


General lighting for low ceilings in hotel, restaurants and home. Good replacement for most traditional CFL lighting fixtures.

GLOS ECON ROUND-5 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	OSRAM DURIS LED 14W (350mA)/ 20W (500mA)/ 28W (700mA)
Lumen:	1500lm (350mA)/2100lm (500mA)/2700lm (700mA)
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	SABIC plastic
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input checked="" type="checkbox"/> WW <input type="checkbox"/> NW

OPTICAL


Optics:	Diffuser
Beam angle:	80
Distribution:	Symmetrical

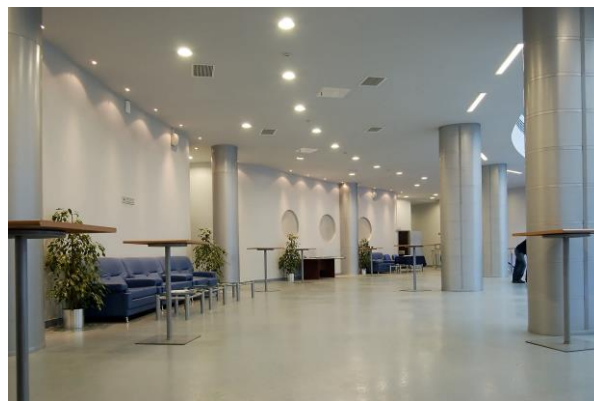


ELECTRICAL

Gear:	LED Driver
Rated current:	350mA/500mA/700mA
Dimming:	Yes (optional)

PHOTOMETRIC

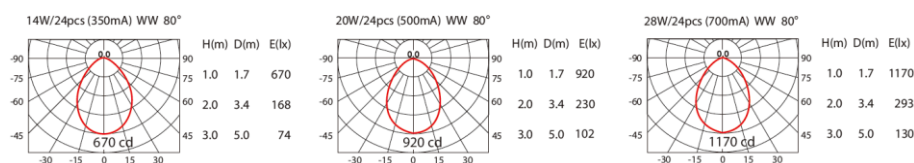

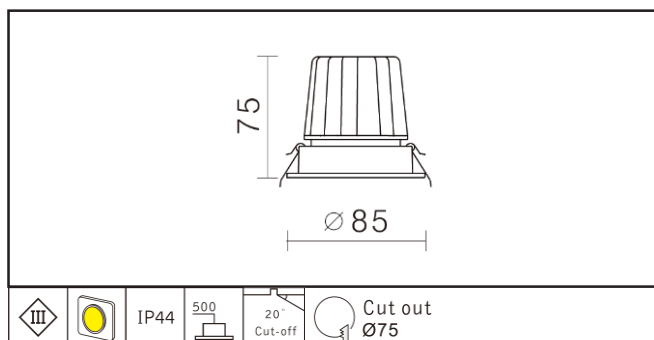

Wide beam angle recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. IP44 on the front and easy to install with two springs. 20° cut-off angle to create visual comfort.

General lighting for hotels, bathrooms, kitchen, showrooms, and other commercial spaces.

GLOS ESTE-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 7.5W (500mA)/700lm
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	50
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC



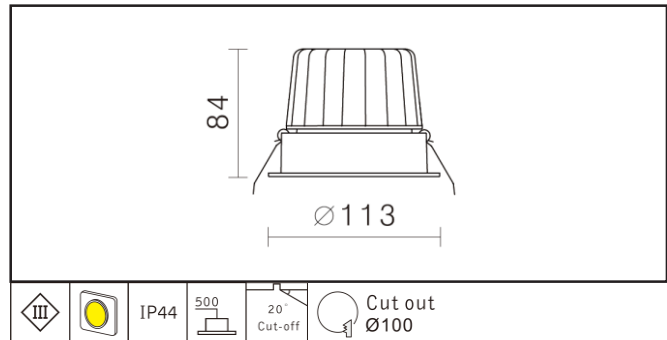

Wide beam angle recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. IP44 on the front and easy to install with two springs. 20° cut-off angle to create visual comfort.

General lighting for hotels, bathrooms, kitchen, showrooms, and other commercial spaces.

GLOS ESTE-2 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1000lm
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	60
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	Yes (optional)

PHOTOMETRIC



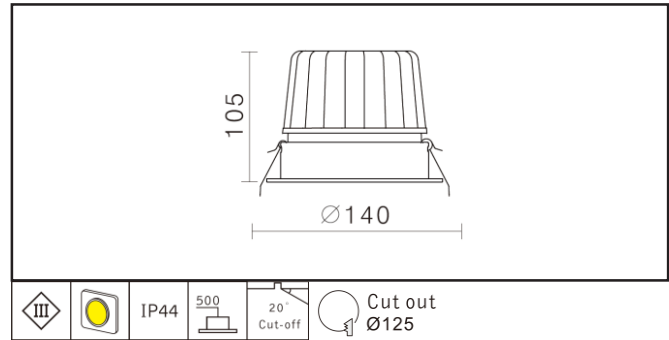

Wide beam angle recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. IP44 on the front and easy to install with two springs. 20° cut-off angle to create visual comfort.

General lighting for hotels, bathrooms, kitchen, showrooms, and other commercial spaces.

GLOS ESTE-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 18.5W (500mA)/1800lm
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	70°
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC



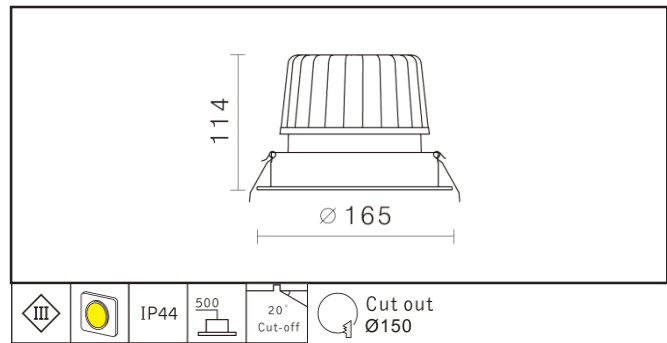

Wide beam angle recessed LED luminaire features CREE CoB LED providing energy-efficient and low-maintenance lighting solutions. IP44 on the front and easy to install with two springs. 20° cut-off angle to create visual comfort.

General lighting for hotels, bathrooms, kitchen, showrooms, and other commercial spaces.

GLOS ESTE-4 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	CREE CoB LED 28W (700mA)/2500lm
CRI:	80 (90 optional)
IP:	IP 44; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	65
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	Yes (optional)

PHOTOMETRIC



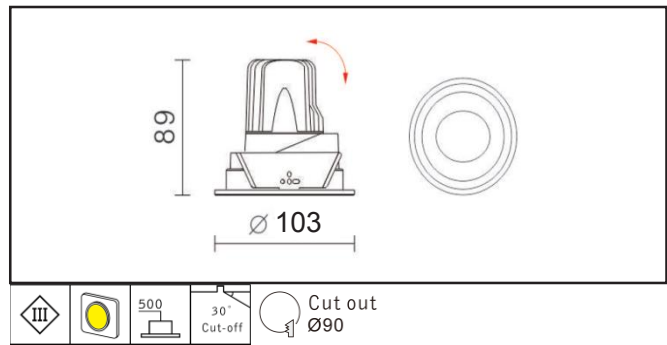

Adjustable narrow beam angle wall washer recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 30° tilt angle to maximize lighting range.

Accent or wall-washing lighting for high ceiling space such as supermarkets, restaurants, exhibitions, showrooms and other commercial spaces.

GLOS GAMA-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 7.5W (500mA)/700lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	25°
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC



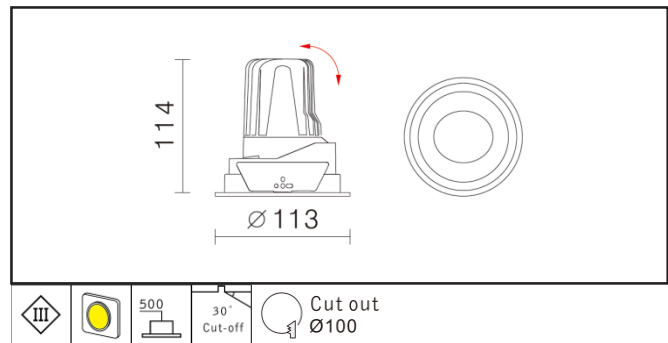

Adjustable narrow beam angle wall washer recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 30° tilt angle to maximize lighting range.

Accent or wall-washing lighting for high ceiling space such as supermarkets, restaurants, exhibitions, showrooms and other commercial spaces.

GLOS GAMA-2 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1000lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	20
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	Yes (optional)

PHOTOMETRIC



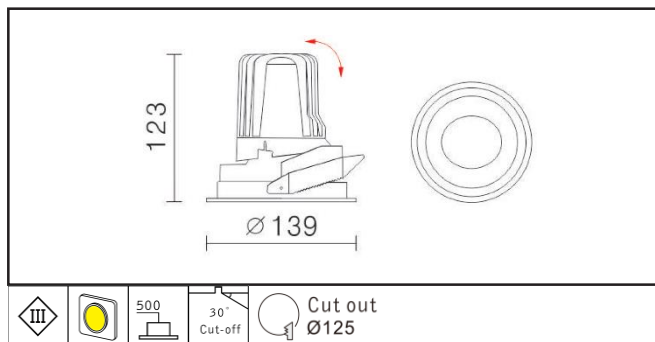

Adjustable narrow beam angle wall washer recessed LED luminaire features CREE CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 30° tilt angle to maximize lighting range.

Accent or wall-washing lighting for high ceiling space such as supermarkets, restaurants, exhibitions, showrooms and other commercial spaces.

GLOS GAMA-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	CREE CoB LED 19.5W (500mA)/1800lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL


Optics:	Reflector
Beam angle:	10°
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC

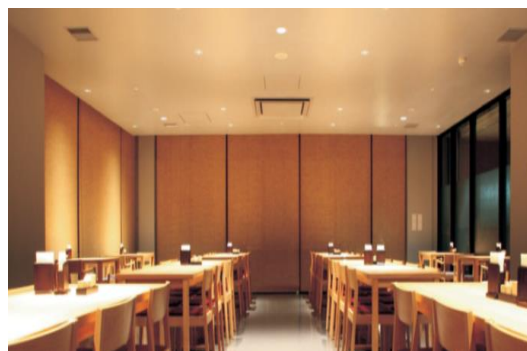

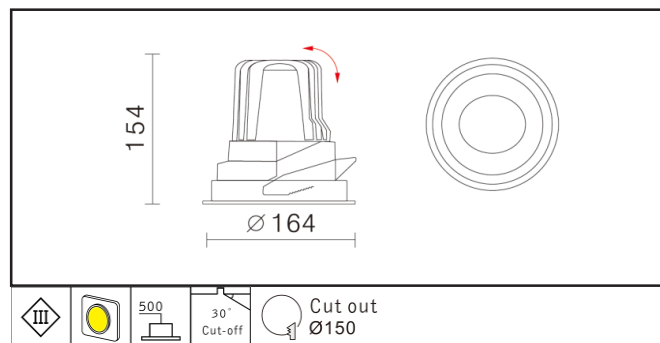

Adjustable narrow beam angle wall washer recessed LED luminaire features CREE CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 30° tilt angle to maximize lighting range.

Accent or wall-washing lighting for high ceiling space such as supermarkets, restaurants, exhibitions, showrooms and other commercial spaces.

GLOS GAMA-4 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	CREE CoB LED 28W (700mA)/2500lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL


Optics:	Reflector
Beam angle:	10°
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	Yes (optional)

PHOTOMETRIC



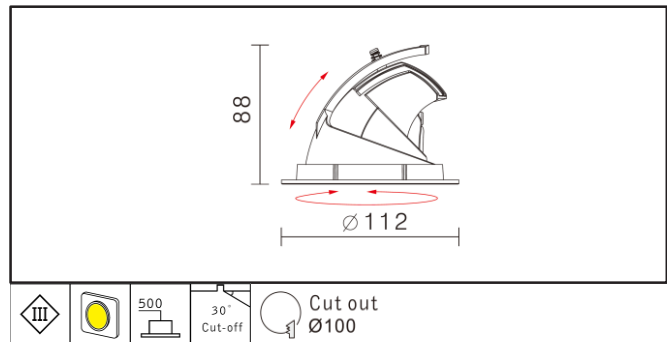

Recessed wall washer LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 60° (-15° to +45°) tilt angle to maximize lighting range.

Spot and flood smooth light distribution for lobby in hotel, reception area, restaurant, exhibition, showroom, cinema, and other commercial spaces.

GLOS HUBO-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1100lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; paint
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL

Optics:	Reflector
Beam angle:	10/20/50
Distribution:	Symmetrical

ELECTRICAL


Gear:	LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	Yes (optional)

PHOTOMETRIC

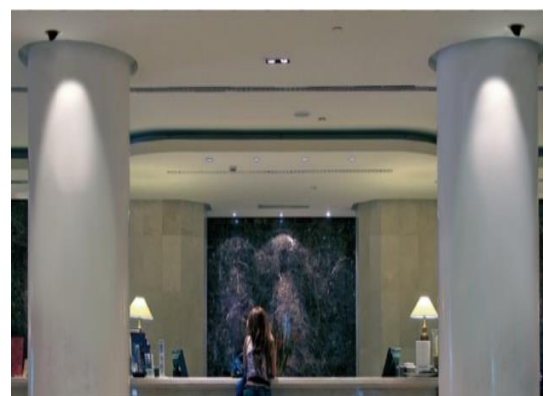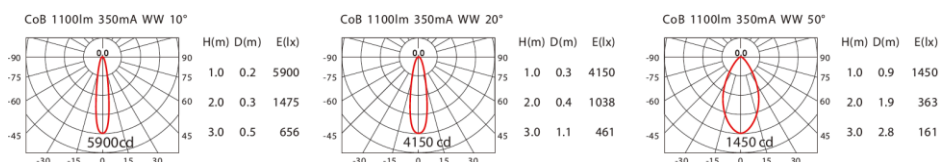

NEW BRACKET MECHANISM



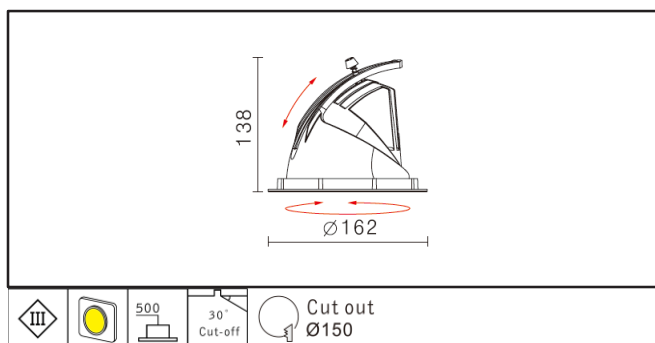

Recessed wall washer LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 60° (-15° to +45°) tilt angle to maximize lighting range.

Spot and flood smooth light distribution for lobby in hotel, reception area, restaurant, exhibition, showroom, cinema, and other commercial spaces.

GLOS HUBO-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 25W (700mA)/2800lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; paint
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL

Optics:	Reflector
Beam angle:	10/20/40/70
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	Yes (optional)

PHOTOMETRIC

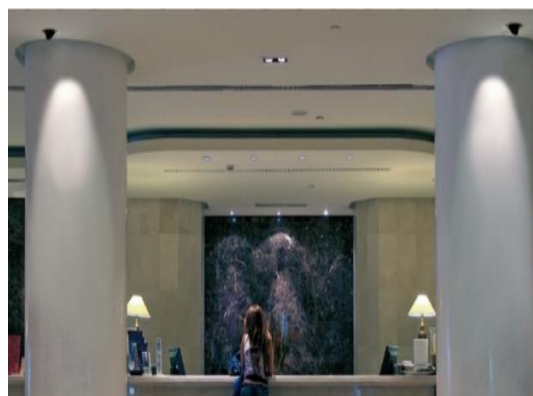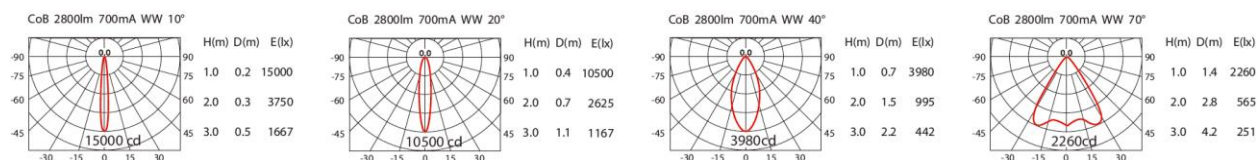

NEW BRACKET MECHANISM




Horizontal



Swiveling-in



Pulling out

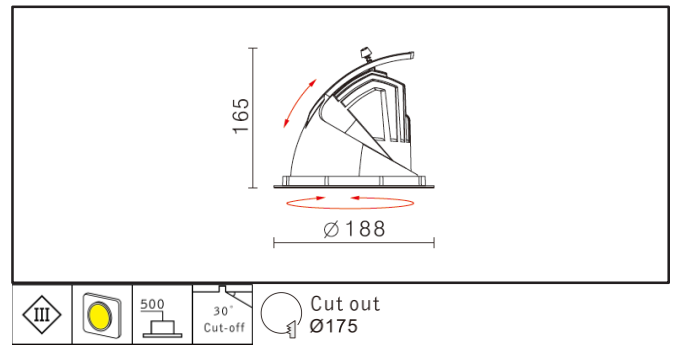

Recessed wall washer LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 60° (-15° to +45°) tilt angle to maximize lighting range.

Spot and flood smooth light distribution for lobby in hotel, reception area, restaurant, exhibition, showroom, cinema, and other commercial spaces.

GLOS HUBO-4 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 32W (900mA)/3600lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; paint
Color:	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW


OPTICAL

Optics:	Reflector
Beam angle:	12/20/40/60
Distribution:	Symmetrical

ELECTRICAL


Gear:	LED Driver
Voltage(V):	220-240
Rated current:	900mA
Dimming:	Yes (optional)

PHOTOMETRIC

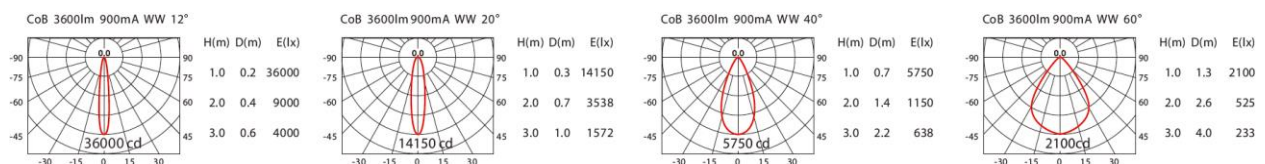

NEW BRACKET MECHANISM



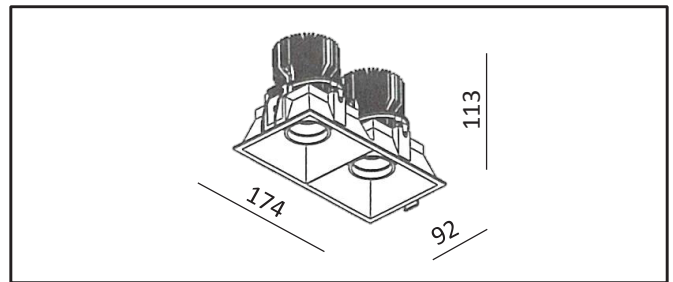

Cut out :
168 x 86 mm

A recessed LED luminaire features BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 0°-20° tilt angle to maximize lighting range.

General lighting for hotels, reception room, restaurants, exhibitions, showrooms.

GLOS MAKE-D RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	BRIDGELUX V8 Array 9.3W*2 (500mA)/1740lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL


Optics:	Reflector
Beam angle:	26/38
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC

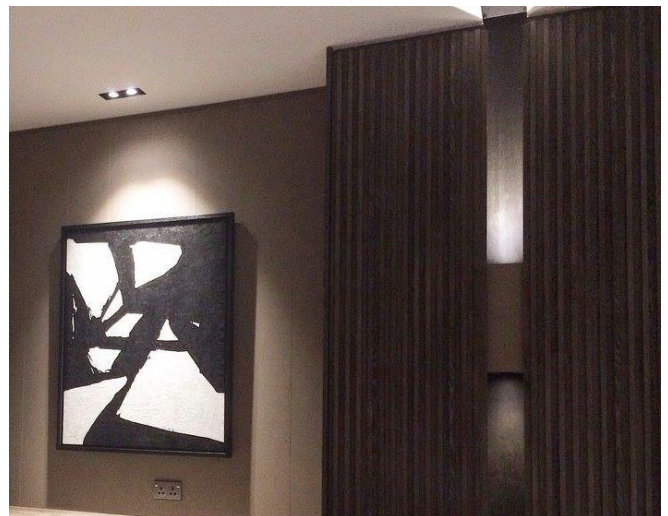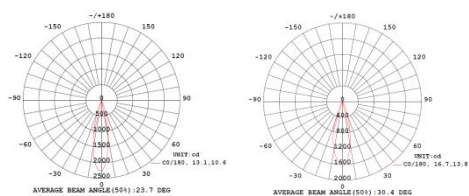

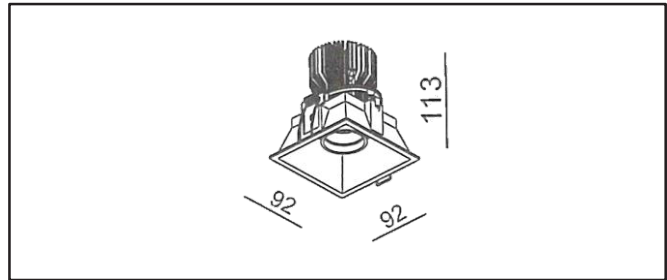

Cut out :
86x86 mm

A recessed LED luminaire features BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 0°-20° tilt angle to maximize lighting range.

General lighting for hotels, reception room, restaurants, exhibitions, showrooms.

GLOS MAKE-S RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	BRIDGELUX V8 Array 9.3W (500mA)/870lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW



OPTICAL


Optics:	Reflector
Beam angle:	26/38
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC

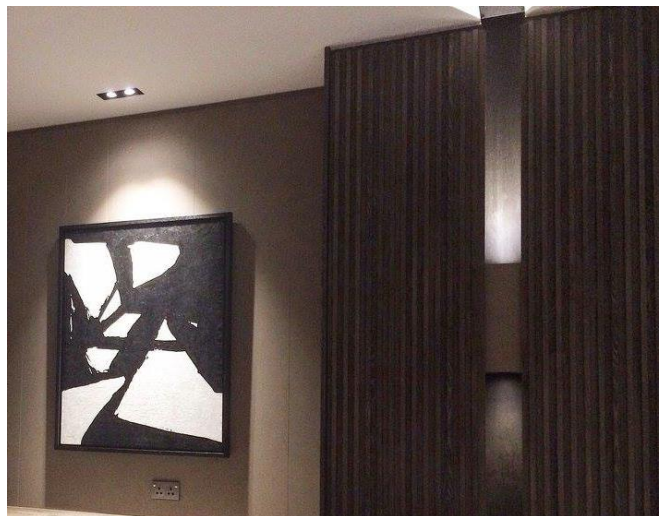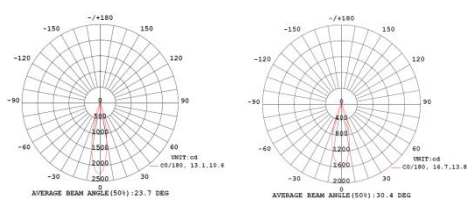

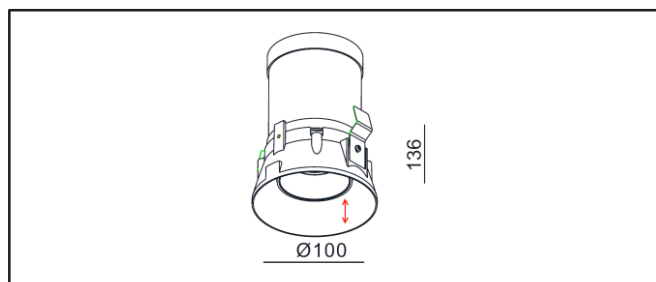

Cut out :
Ø127

Trimless recessed LED luminaire features BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions. The lamp head is extendable which allows 350° rotation and 0°-45° tilt angle to maximize lighting range.

General lighting for hotels, reception room, restaurants, exhibitions, showrooms.

GLOS MAXI HIDE-9W RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	BRIDGELUX V8 Array 9.3W (500mA)/992lm
CRI:	80
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	□ WH ■ BK ■ SV
LED CCT:	3000K


OPTICAL

Optics:	Reflector
Beam angle:	38
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)


PHOTOMETRIC




MOUNTING KIT

Cut out :
Ø127

Material: Aluminum



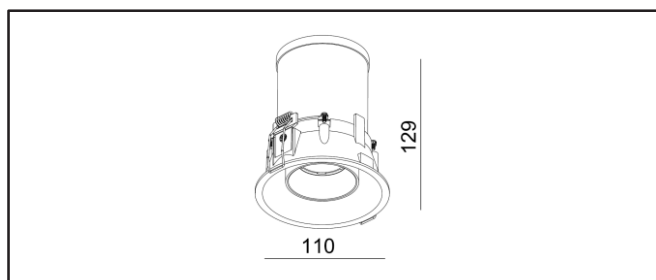

✂ Cut out :
Ø89

Recessed LED luminaire features BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions. The lamp head is extendable which allows 350° rotation and 0°-45° tilt angle to maximize lighting range.

General lighting for hotels, reception room, restaurants, exhibitions, showrooms.

GLOS MAXI-BW RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	BRIDGELUX V8 Array 9.3W (500mA)/992lm
CRI:	80
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	□ WH ■ BK ■ SV
LED CCT:	3000K


OPTICAL


Optics:	Reflector
Beam angle:	38
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	500mA
Dimming:	Yes (optional)

PHOTOMETRIC



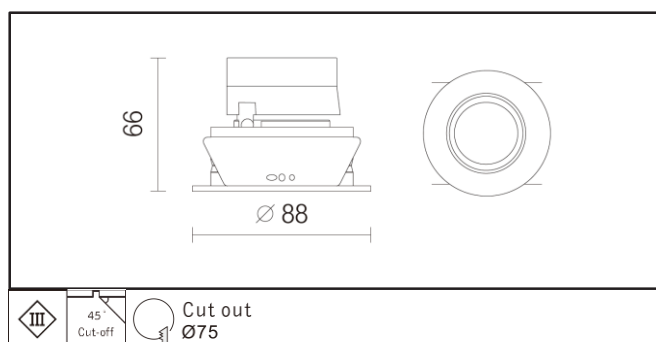

Wall washer with 355° rotation on mounting ring and 30° tilt angle recessed luminaire features single halogen MR-16 or GU-10 module, suitable for various halogen lamp-source and LEDs. 45° cut off angle with deep body design to enhance glaring control.

Elegant light distribution and glare control perfect for restaurant, dining room and hotel.

GLOS PIN-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	MR-16/GU-10 50W
IP:	IP 20; Indoor
Material:	Mounting ring: die-cast aluminum, powder-coated Housing: steel, powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV


OPTICAL

Lamp holder:	Die-casting aluminum, powder-coated
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	-
Voltage(V):	220-240
Input current:	12V
Dimming:	-



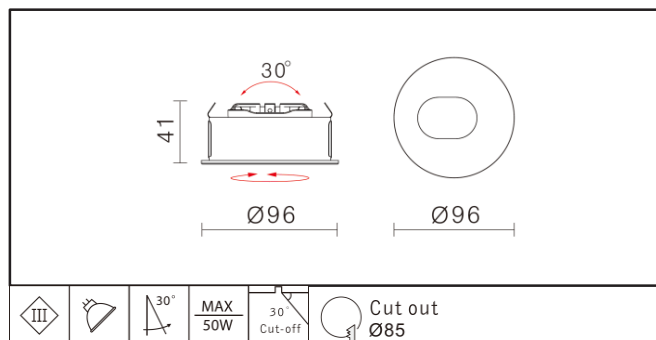

Wall washer with 30° tilt angle recessed luminaire features single halogen MR-16 or GU-10 module, suitable for various halogen lamp-source and LEDs.

Recessed wall washer for dining rooms, restaurants and other low ceiling spaces.

GLOS PIN-2 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	MR-16/GU-10 50W
IP:	IP 20; Indoor
Material:	Mounting ring: die-cast aluminum, powder-coated Housing: steel, powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV


OPTICAL

Lamp holder:	Die-casting aluminum, powder-coated
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	-
Voltage(V):	220-240
Input current:	12V
Dimming:	-



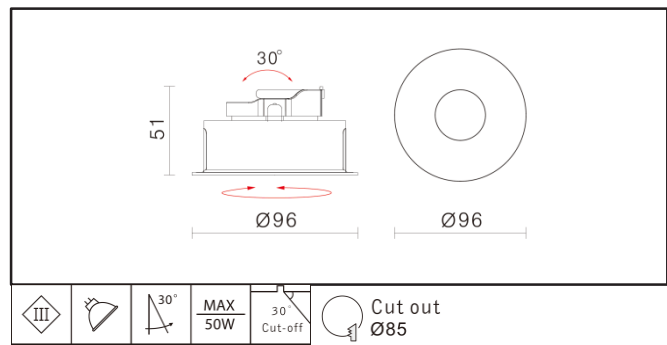

Wall washer with 30° tilt angle recessed luminaire features single halogen MR-16 or GU-10 module, suitable for various halogen lamp-source and LEDs.

Recessed wall washer for dining rooms, restaurants and other low ceiling spaces.

GLOS PIN-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	MR-16/GU-10 50W
IP:	IP 20; Indoor
Material:	Mounting ring: die-cast aluminum, powder-coated Housing: steel, powder-coated
Color:	□ WH ■ BK ■ SV


OPTICAL

Lamp holder:	Die-casting aluminum, powder-coated
Beam angle:	(Subject to lamp-source)
Distribution:	Symmetrical

ELECTRICAL

Gear:	-
Voltage(V):	220-240
Input current:	12V
Dimming:	-



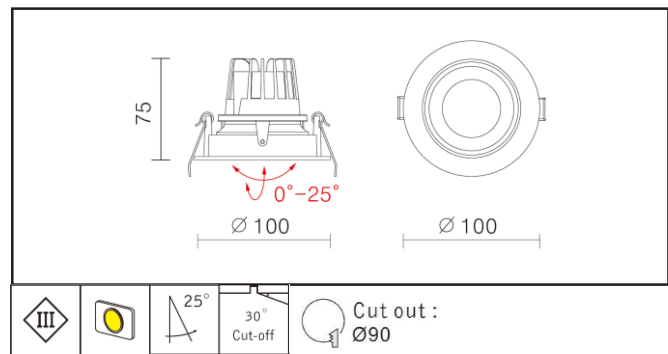

A recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. Deep cut-off angle provide good glaring control and 25° tilt angle to maximize lighting range.


Symmetrical and uniform light distribution suitable for hotel, restaurant, showrooms and retail lighting.

GLOS SINO-I RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1300lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL


Optics:	Reflector
Beam angle:	10/20/50
Distribution:	Symmetrical

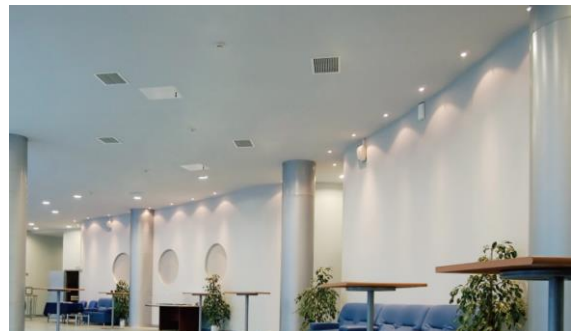


ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	Yes (optional)

PHOTOMETRIC

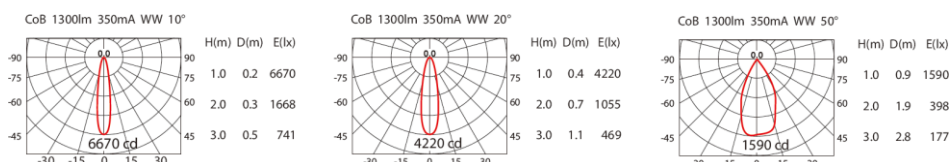

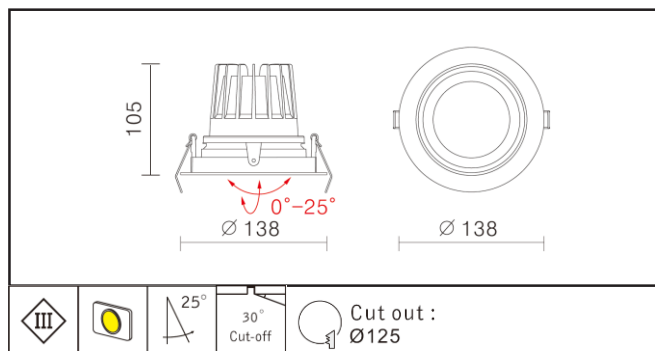

A recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. Deep cut-off angle provide good glaring control and 25° tilt angle to maximize lighting range.


Symmetrical and uniform light distribution suitable for hotel, restaurant, showrooms and retail lighting.

GLOS SINO-2 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 25W (700mA)/2800lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL


Optics:	Reflector
Beam angle:	10/20/40/70
Distribution:	Symmetrical

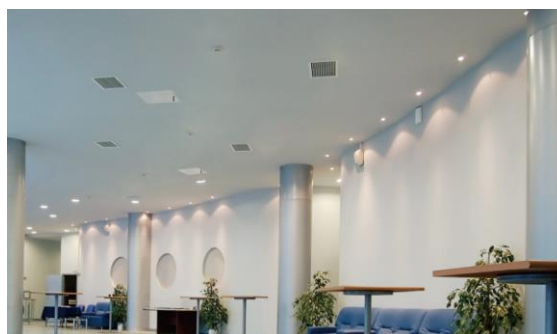


ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	Yes (optional)

PHOTOMETRIC

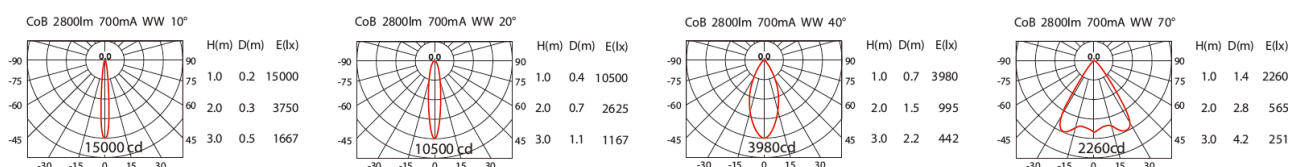

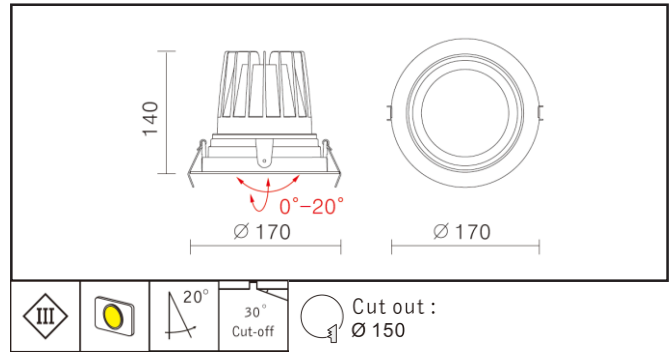

A recessed LED luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. Deep cut-off angle provide good glaring control and 20° tilt angle to maximize lighting range.

Symmetrical and uniform light distribution suitable for hotel, restaurant, showrooms and retail lighting.

GLOS SINO-3 RECESSED LUMINAIRE

Mounting:	Recessed Ceiling
Lamp:	SHARP ZENIGATA CoB LED 32W (900mA)/3600lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

OPTICAL

Optics:	Reflector
Beam angle:	10/20/40/70
Distribution:	Symmetrical



ELECTRICAL

Gear:	LED Driver
Voltage(V):	220-240
Rated current:	900mA
Dimming:	Yes (optional)

PHOTOMETRIC

