

IP54



Sleek and modern design outdoor wall-recessed LED luminaire features high quality CREE LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

### GLOS SMILEY-R WALL-RECESSED LUMINAIRE

Mounting:	Wall-recessed
Lamp:	CREE LED 3W (700mA)
CRI:	80 (90 optional)
IP:	IP 54; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> RT <input type="checkbox"/> BL <input type="checkbox"/> GL <input type="checkbox"/> AM


### OPTICAL

Beam angle:	-
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	-



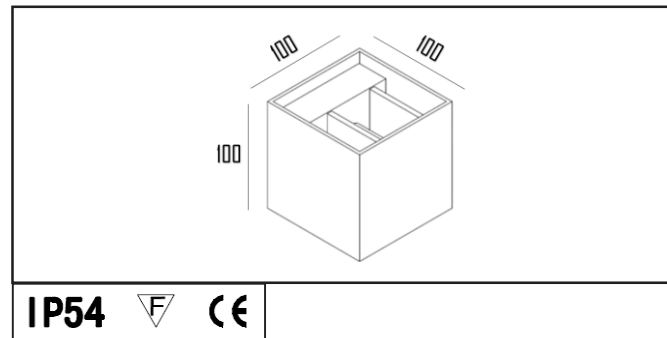

An outdoor surface-mounted LED luminaire features CITIZEN LED 6W providing energy-efficient and low-maintenance lighting solutions. Efficient light distribution for outdoor applications. Mainly used as decorative lightings and down illumination to enhance its visual effect to the area.

### GLOS WALL BOX SURFACE-MOUNTED LUMINAIRE


Mounting:	Surface-mounted
Lamp:	CITIZEN LED 3W*2 (350mA)
CRI:	80 (90 optional)
IP:	IP 54; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BF <input type="checkbox"/> SY
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW


### OPTICAL

Optics:	-
Beam angle:	-
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	-

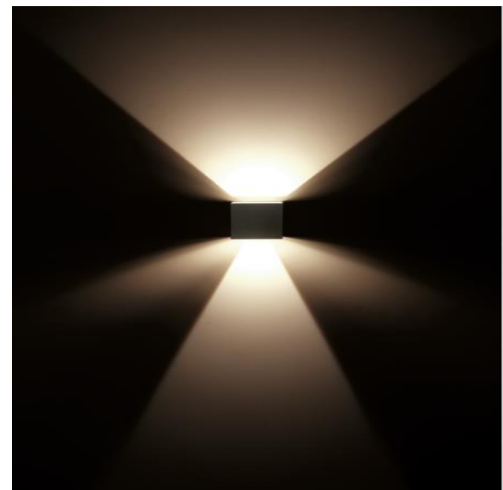

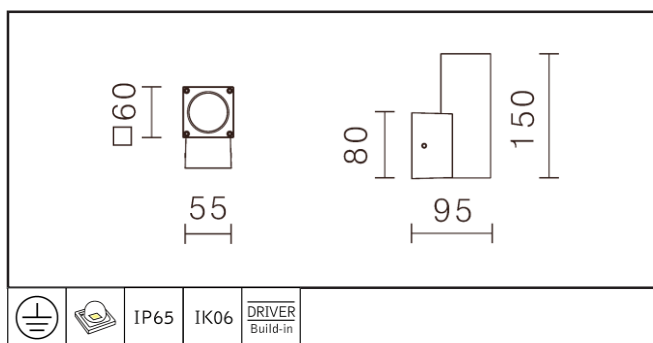

An IP65 outdoor wall-mounted LED luminaire features three high quality OSRAM OSLOM LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan.

Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO-SQ WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	OSRAM OSLOM LED 1.2W*3 (350mA)
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	■ BF ■ SV
LED CCT:	□ CW ■ NW ■ WW

### OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	12/20/30/60
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

### PHOTOMETRIC

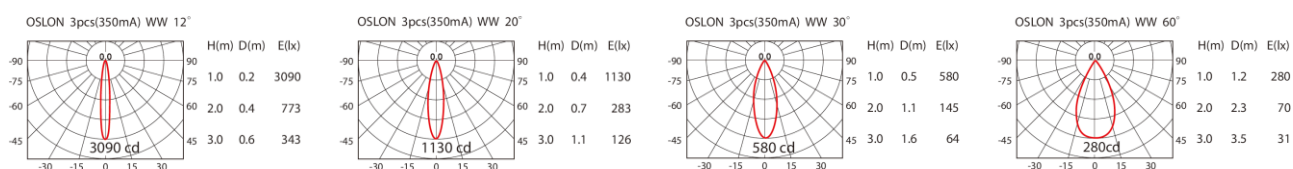

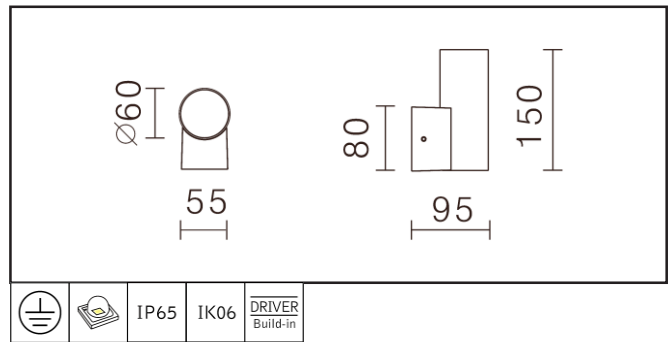

An IP65 outdoor wall-mounted LED luminaire features three high quality OSRAM OSLOM LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan.

Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO-RD WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	OSRAM OSLOM LED 1.2W*3 (350mA)
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	■ BF ■ SV
LED CCT:	□ CW ■ NW ■ WW

### OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	12/20/30/60
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

### PHOTOMETRIC

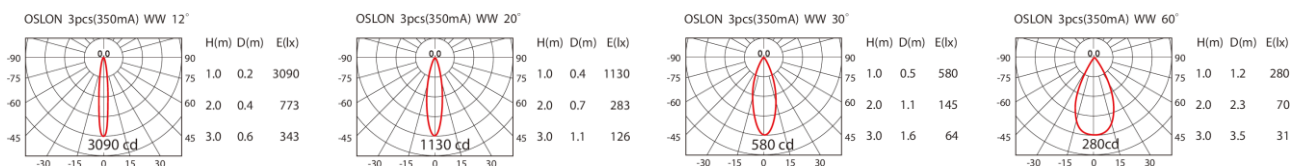

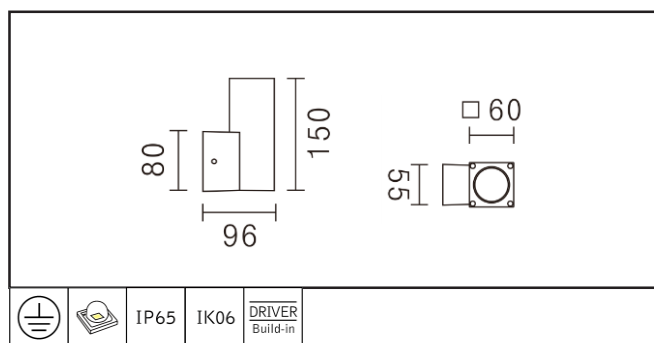

An IP65 outdoor wall-mounted LED luminaire features single high quality LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan. Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO SQ-I (7.5W) WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	SHARP ZENIGATA CoB LED 7.5W (500mA)/800lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	BF ■
LED CCT:	WW ■ NW ■ CW □

### OPTICAL


Optics:	High gloss optic reflector
Beam angle:	10/20/50
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	500mA
Dimming:	-

### PHOTOMETRIC

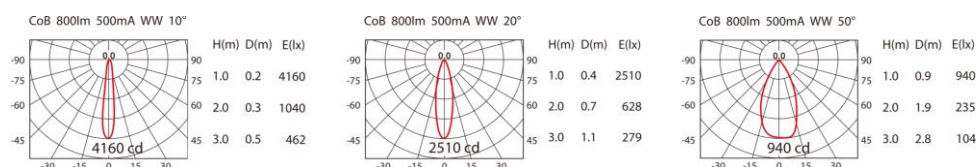

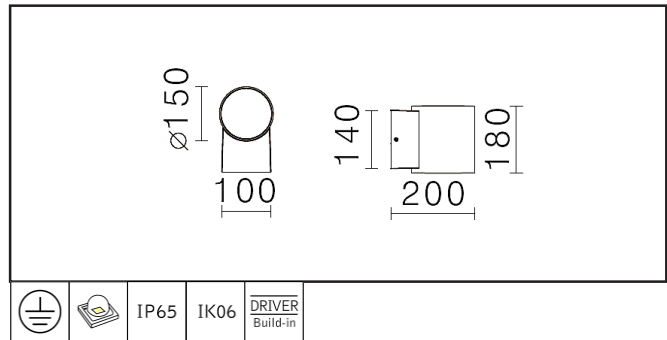

An IP65 outdoor wall-mounted LED luminaire features single high quality LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan. Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO RD-3 (25.5W) WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	CITIZEN CoB LED 25.5W (700mA)/3100lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	BF ■
LED CCT:	WW ■ NW ■ CW □

### OPTICAL





Optics:	High gloss optic reflector
Beam angle:	12/20/40/60
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	700mA
Dimming:	-

### PHOTOMETRIC



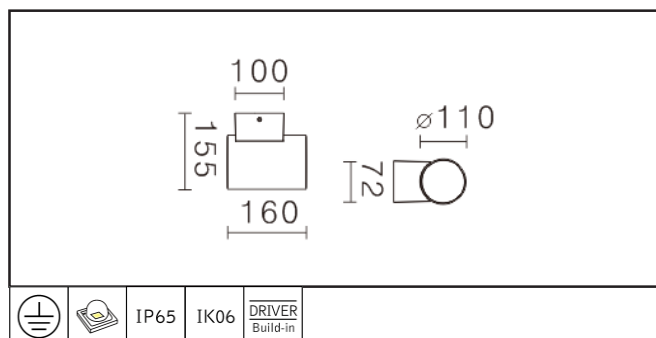


An IP65 outdoor wall-mounted LED luminaire features single high quality LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan. Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO RD-2 (18W) WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	CITIZEN CoB LED 18W (500mA)/2400lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	BF ■
LED CCT:	WW ■    NW ■    CW □

### OPTICAL


Optics:	High glass optic reflector
Beam angle:	10/20/40/70°
Distribution:	Symmetrical

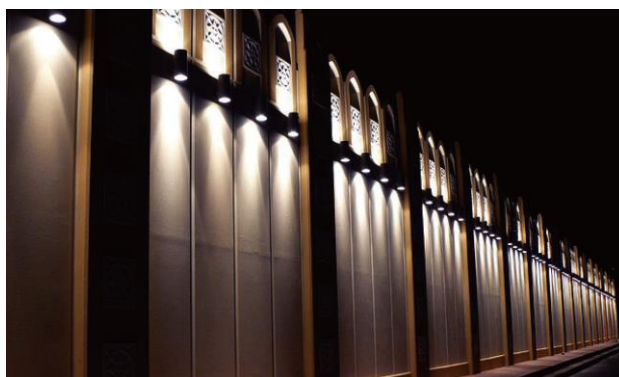


### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	500mA
Dimming:	-

### PHOTOMETRIC

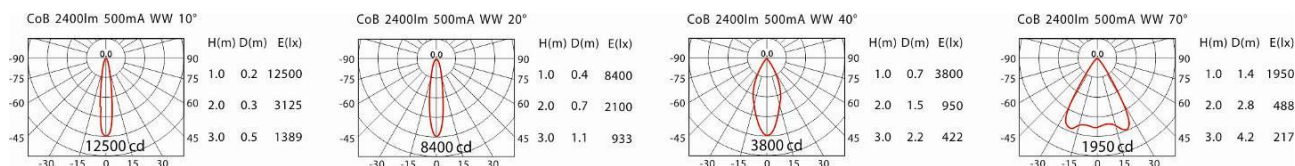



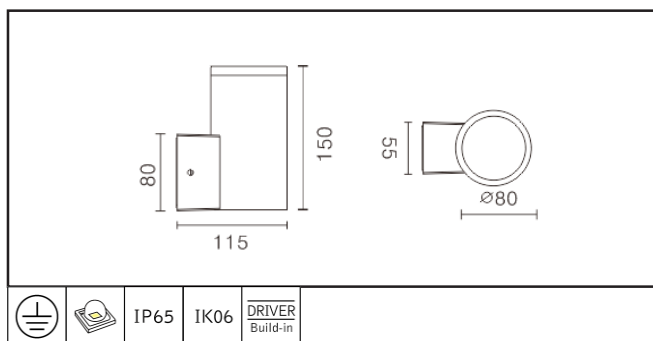

An IP65 outdoor wall-mounted LED luminaire features single high quality LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan. Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS MONO RD-1 (7.5W) WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	SHARP ZENIGATA CoB LED 7.5W (500mA)/800lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	BF ■
LED CCT:	WW ■ NW ■ CW □

### OPTICAL




Optics:	High glass optic reflector
Beam angle:	10/20/50
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	500mA
Dimming:	-

### PHOTOMETRIC





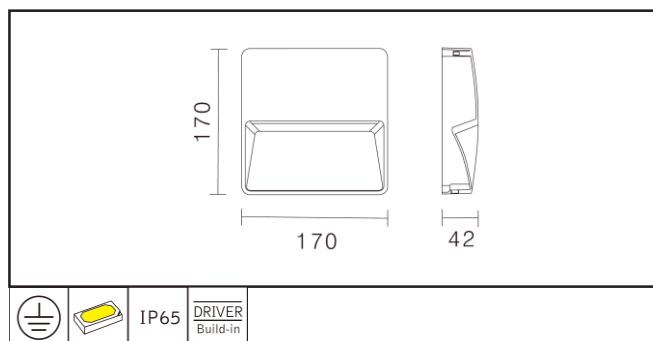

An outdoor wall-mounted LED luminaire features single high quality SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. IP65 and easy to install for outdoor surroundings.


Suitable for the external walls of the building, porches, hallways, corridors and car parks.

### GLOS EYELID SQ-2 WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1200lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input checked="" type="checkbox"/> NW <input type="checkbox"/> WW

### OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	95
Distribution:	Asymmetrical

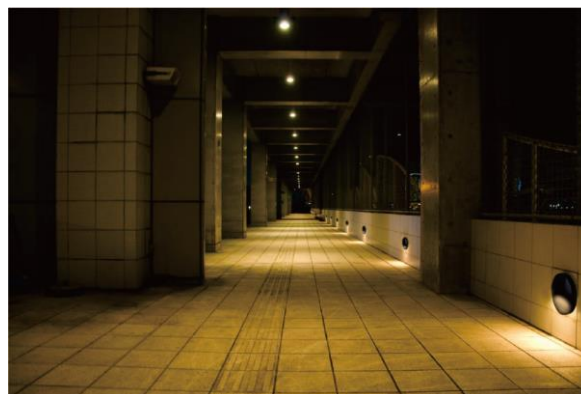


### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	Yes (optional)

### PHOTOMETRIC



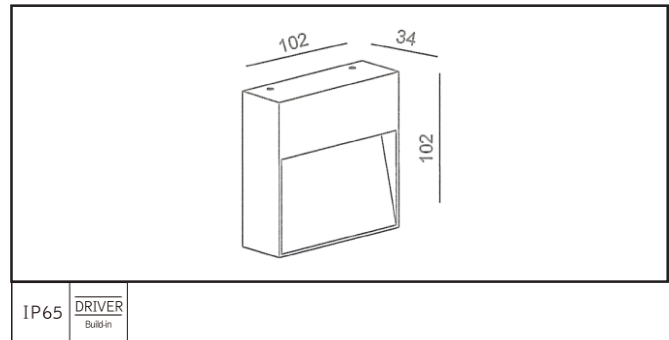

Sleek and modern design outdoor wall-mounted LED luminaire features high quality BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions.


Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

#### GLOS EYELID SQ-1 OUTDOOR WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	BRIDGELUX V6 Array 3.1W (350mA)/ 280lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Aluminum; powder-coated
Color:	□ WH ■ BK ■ SY
LED CCT:	3000K

#### OPTICAL


Beam angle:	-
Distribution:	Symmetrical

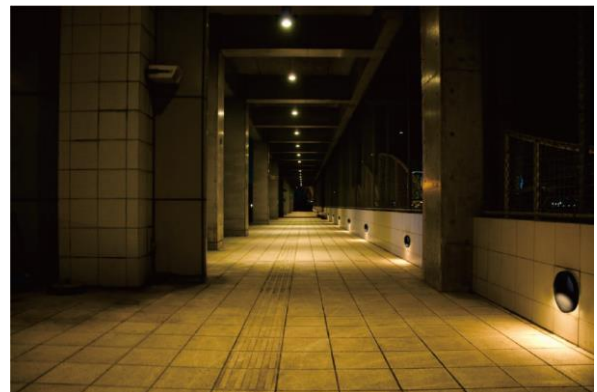


#### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	-

#### PHOTOMETRIC



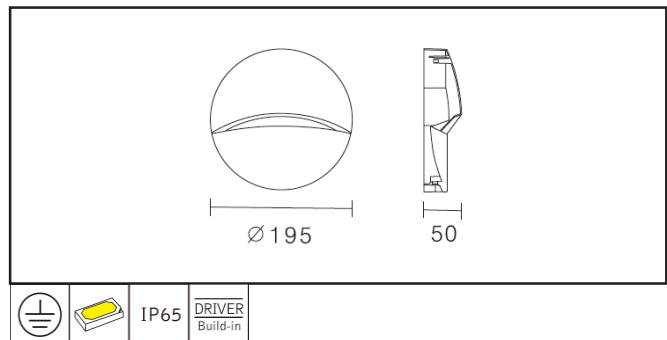

An outdoor wall-mounted LED luminaire features single high quality SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. IP65 and easy to install for outdoor surroundings.


Suitable for the external walls of the building, porches, hallways, corridors and car parks.

### GLOS EYELID RD-2 WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1200lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SV
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input checked="" type="checkbox"/> WW

### OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	100
Distribution:	Asymmetrical

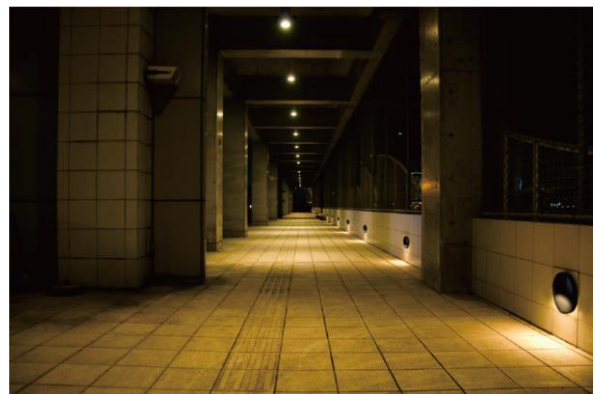


### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	Yes (optional)

### PHOTOMETRIC



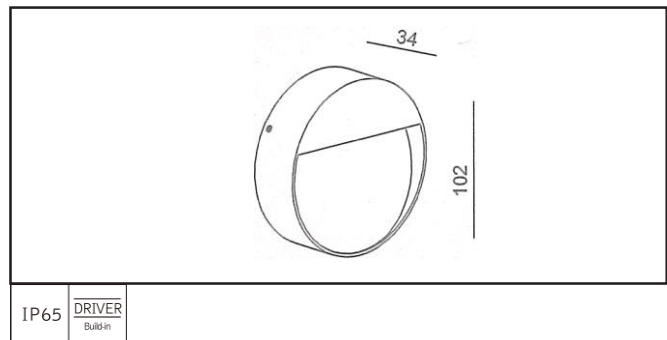

Sleek and modern design outdoor wall-mounted LED luminaire features high quality BRIDGELUX LED providing energy-efficient and low-maintenance lighting solutions.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

#### GLOS EYELID RD-I OUTDOOR WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	BRIDGELUX V6 Array 3.1W (350mA)/ 280lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY
LED CCT:	3000K



#### OPTICAL


Beam angle:	-
Distribution:	Symmetrical

#### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	-

#### PHOTOMETRIC

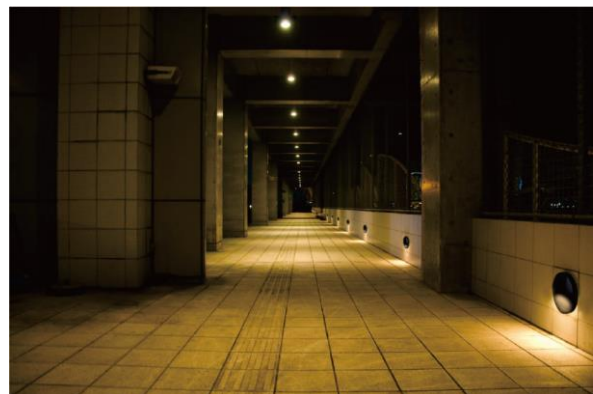

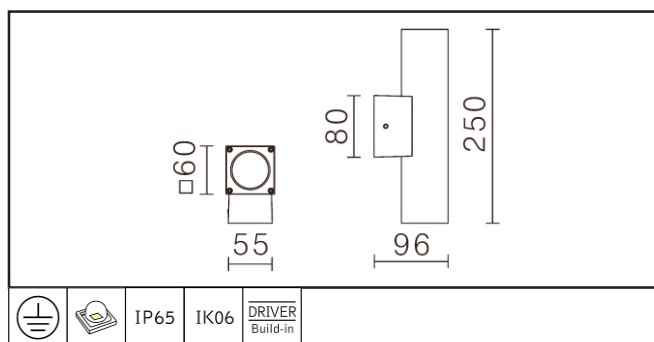

An IP65 outdoor wall-mounted LED luminaire features six high quality OSRAM OSLOX LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan.

Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

## GLDS DUAL-SQ WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	OSRAM OSLOX LED (1.2W*3)*2 (350mA)
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	■ BF    ■ SV
LED CCT:	□ CW    ■ NW    ■ WW

## OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	12/20/30/60
Distribution:	Symmetrical




## ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

## PHOTOMETRIC

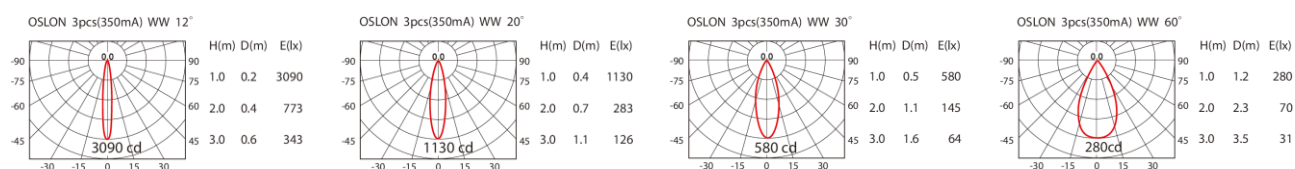

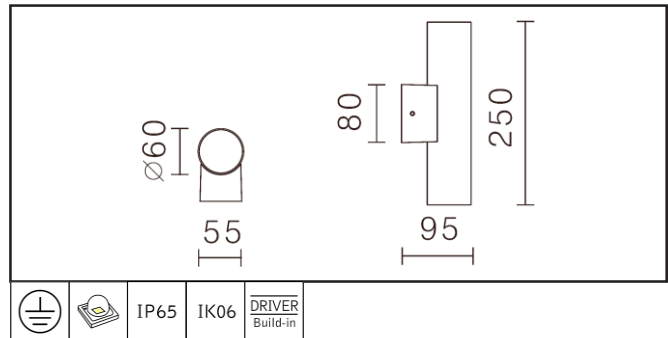

An IP65 outdoor wall-mounted LED luminaire features six high quality OSRAM OSLOD LED providing energy-efficient and low-maintenance lighting solutions. Elegant style with patent waterproofing design and complete range of products for different applications. Good thermal management guarantees long lifespan.

Designed for indoor and outdoor applications. Used as decorative and effect lighting in hall, wall, gate post and corridor.

### GLOS DUAL-RD WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	OSRAM OSLOD LED (1.2W*3)*2 (350mA)
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Die-cast aluminum; paint
Color:	■ BF ■ SV
LED CCT:	□ CW ■ NW ■ WW

### OPTICAL


Optics:	High efficiency optics lenses
Beam angle:	12/20/30/60
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

### PHOTOMETRIC

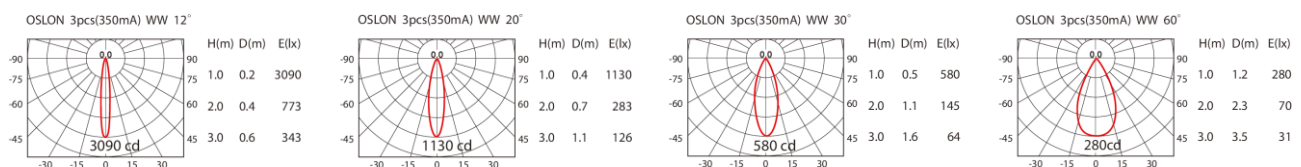

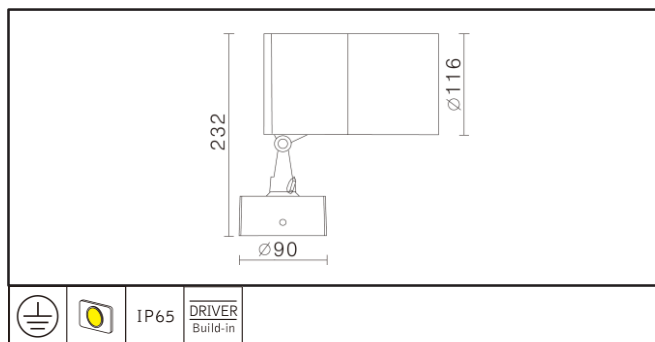

An outdoor surface-mounted LED luminaire featuring one high quality SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 140° tilt angle to maximize lighting range. Deep front shade cover provides better glaring control and different accessories available.

Spotlight for garden, building surface and trees.

### GLOS BASE SCOPE-3 SURFACE-MOUNTED LUMINAIRE

Mounting:	Surface-mounted
Lamp:	SHARP ZENIGATA CoB LED 25W (700mA)/2800lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Aluminum; painting
Color:	BF ■
LED CCT:	WW ■ NW ■ CW □




### OPTICAL

Optics:	Reflector
Beam angle:	10/20/40
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	120-240
Rated current:	700mA
Dimming:	-

### PHOTOMETRIC




Specifications are subject to change without prior notice

### ACCESSORIES




**Honeycomb**  
BASE SCOPE-3/AC-01



**Sculpted PC Glass**  
BASE SCOPE-3/AC-02



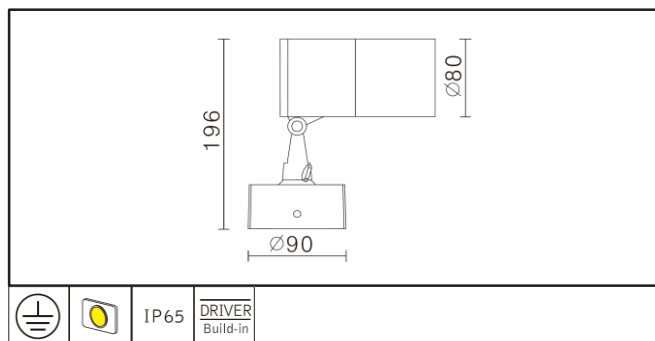

An outdoor surface-mounted LED luminaire featuring one high quality SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 140° tilt angle to maximize lighting range. Deep front shade cover provides better glaring control and different accessories available.

Spotlight for garden, building surface and trees.

### GLOS BASE SCOPE-2 SURFACE-MOUNTED LUMINAIRE

Mounting:	Surface-mounted
Lamp:	SHARP ZENIGATA CoB LED 13W (350mA)/1300lm
CRI:	80 (90 optional)
IP:	IP 65; Outdoor
Material:	Aluminum; painting
Color:	BF ■
LED CCT:	WW ■ NW ■ CW □


### OPTICAL

Optics:	Reflector
Beam angle:	10/20/50
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

### PHOTOMETRIC

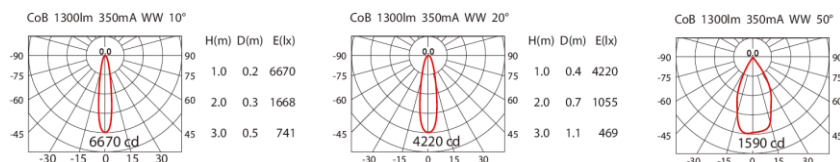


Specifications are subject to change without prior notice


### ACCESSORIES



**Honeycomb**  
BASE SCOPE-2/AC-01



**Sculpted PC Glass**  
BASE SCOPE-2/AC-02

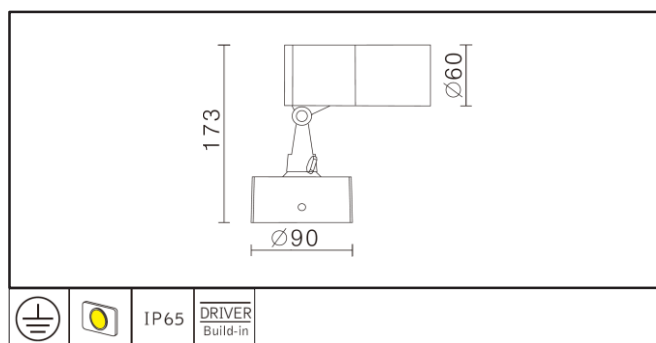

An outdoor surface-mounted LED luminaire featuring one high quality SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. 355° rotation and 140° tilt angle to maximize lighting range. Deep front shade cover provides better glaring control and different accessories available.

Spotlight for bounding walls, building surface, doorposts, bridges and piers.

### GLOS BASE SCOPE-1 SURFACE-MOUNTED LUMINAIRE

Mounting:	Surface-mounted
Lamp:	SHARP ZENIGATA CoB LED 7.5W (500mA)/800lm
CRI:	80 (90 optional)
IP:	IP 67; Outdoor
Material:	Die-cast aluminum; powder-coated
Color:	BF <span style="display:inline-block; width:10px; height:10px; background-color:black; border:1px solid black;"></span>
LED CCT:	WW <span style="display:inline-block; width:10px; height:10px; background-color:yellow; border:1px solid black;"></span> NW <span style="display:inline-block; width:10px; height:10px; background-color:lightyellow; border:1px solid black;"></span> CW <span style="display:inline-block; width:10px; height:10px; background-color:white; border:1px solid black;"></span>


### OPTICAL

Optics:	Reflector
Beam angle:	15/24/36
Distribution:	Symmetrical

### ELECTRICAL


Gear:	Integral LED Driver
Voltage(V):	100-240
Rated current:	500mA
Dimming:	-

### PHOTOMETRIC

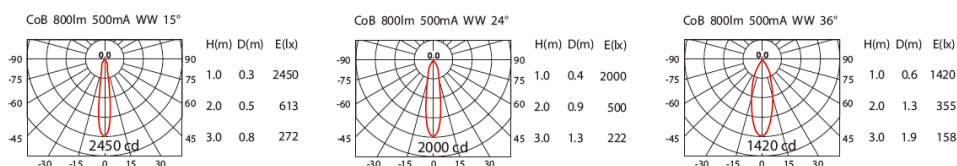


Specifications are subject to change without prior notice

### ACCESSORIES



**Honeycomb**  
BASE SCOPE-1/AC-01



**Sculpted PC Glass**  
BASE SCOPE-2/AC-02