

A surface-mounted luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. General/Accent lighting for concrete and false ceiling for residences, commercial and retail applications.

GLOS PIXEL SQUARE-2 SURFACE-MOUNTED LUMINAIRE

Mounting:	Surface-mounted
Lamp:	SHARP ZENIGATA CoB LED 9W/850lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK
LED CCT:	3000K


OPTICAL


Optics:	Reflector
Beam angle:	60
Distribution:	Symmetrical

ELECTRICAL

Gear:	LED driver
Voltage(V):	220-240
Rated current:	250mA
Dimming:	-

PHOTOMETRIC



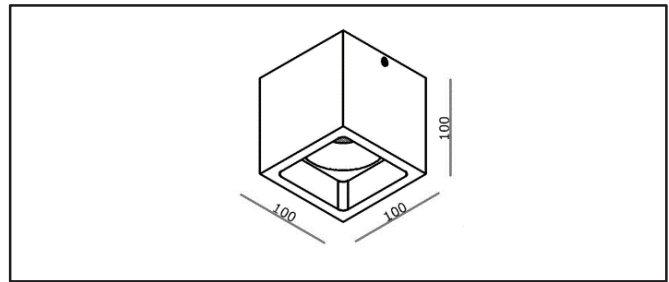

A surface-mounted luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. General/Accent lighting for concrete and false ceiling for residences, commercial and retail applications.

GLOS PIXEL SQUARE-2 SURFACE-MOUNTED LUMINAIRE

- Mounting: Surface-mounted
- Lamp: SHARP ZENIGATA CoB LED 9W/850lm
- CRI: 80 (90 optional)
- IP: IP 20; Indoor
- Material: Die-cast aluminum; powder-coated
- Color: WH BK
- LED CCT: 3000K


OPTICAL


- Optics: Reflector
- Beam angle: 60
- Distribution: Symmetrical


ELECTRICAL

- Gear: LED driver
- Voltage(V): 220-240
- Rated current: 250mA
- Dimming: -

PHOTOMETRIC



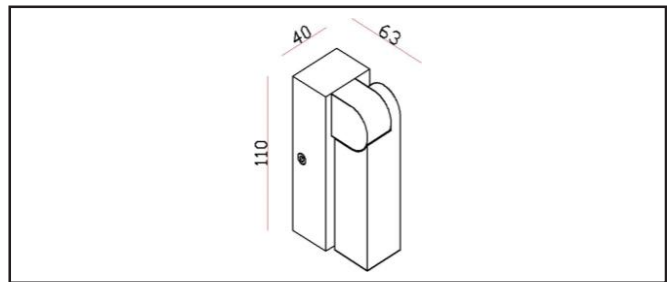

◆ CE  IP20

Unique and adjustable indoor wall-mounted LED luminaire features single CREE XB-D providing energy-efficient and low-maintenance lighting solutions. 0°-320° rotation and 0°-145° tilt angle to maximize lighting range.

Used as decorative lightings or guide-lightings for hall, foyer, corridor, residential and commercial applications.

GLOS STICKMAN WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	CREE XB-D 2W/144lm
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum, powder-coated.
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK
LED CCT:	<input checked="" type="checkbox"/> WW


OPTICAL


Beam angle:	20
Distribution:	Symmetrical

ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	-
Dimming:	-

PHOTOMETRIC



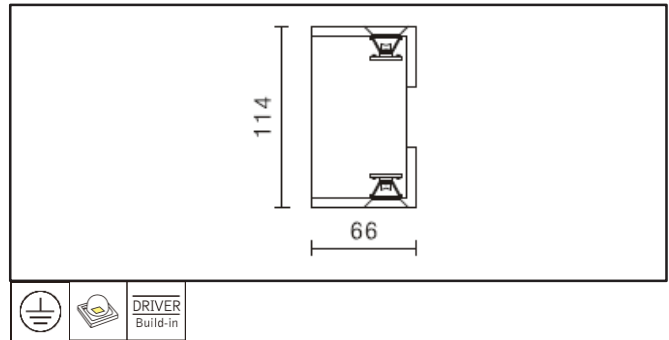

Sleek and modern design indoor surface-mounted wall LED luminaire featuring two high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Patent thermal management guarantees longer lifespan and enhance heat ventilation.

Used for decorative and effect lighting in hall, corridor, residences or commercial applications.

GLOS LWA-302 WALL-MOUNTED LUMINAIRE


Mounting:	Wall-mounted
Lamp:	OSRAM OSLOX LED 1.2W*2 (350mA)
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum, anodized
Color:	<input checked="" type="checkbox"/> AB
LED CCT:	<input type="checkbox"/> WW <input type="checkbox"/> NW <input type="checkbox"/> CW


OPTICAL

Beam angle:	-
Distribution:	Symmetrical

ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	-

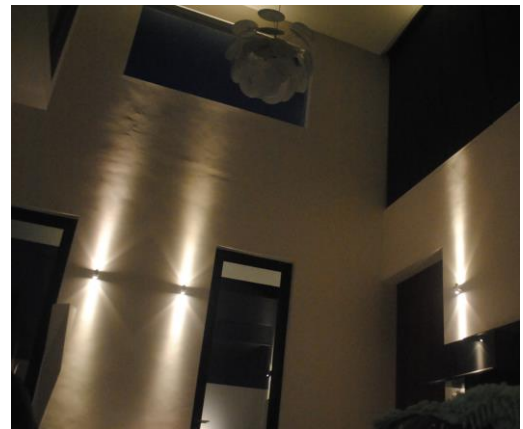

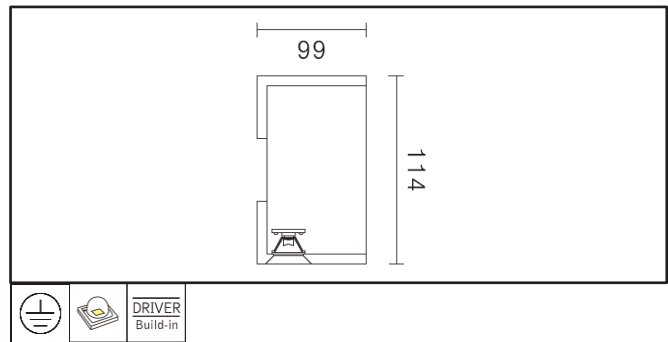

Sleek and modern design indoor surface-mounted wall LED luminaire featuring one high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Patent thermal management guarantees longer lifespan and enhance heat ventilation.

Used for decorative and effect lighting in hall, corridor, residences or commercial applications.

GLOS LWA-301 WALL-MOUNTED LUMINAIRE


Mounting:	Wall-mounted
Lamp:	OSRAM OSLOX LED 1.2W*1 (350mA)
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum, anodized
Color:	<input checked="" type="checkbox"/> AB
LED CCT:	<input checked="" type="checkbox"/> WW <input type="checkbox"/> NW <input type="checkbox"/> CW


OPTICAL

Beam angle:	-
Distribution:	Symmetrical

ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	350mA
Dimming:	-

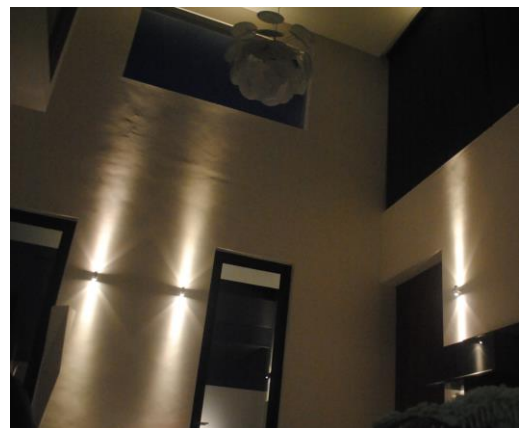

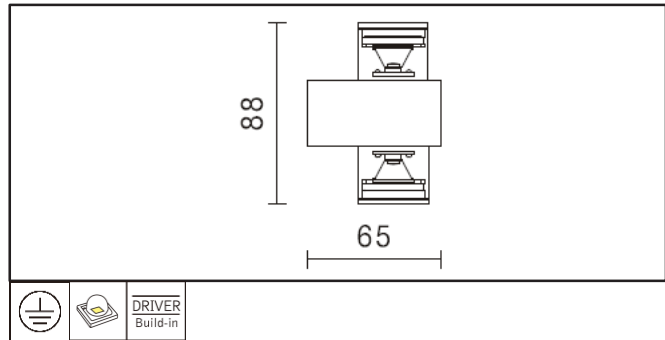

Sleek and modern design indoor surface-mounted wall LED luminaire featuring two high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Patent thermal management guarantees longer lifespan and enhance heat ventilation.

Used for decorative and effect lighting in hall, corridor, residences or commercial applications.

GLOS LWA-202 WALL-MOUNTED LUMINAIRE

Mounting:	Wall-mounted
Lamp:	OSRAM OSLOM LED 1.2W*2 (350mA)
CRI:	80 (90 optional)
IP:	IP 20; Indoor
Material:	Die-cast aluminum, anodized
Color:	<input checked="" type="checkbox"/> AB
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> R <input type="checkbox"/> BL <input type="checkbox"/> G <input type="checkbox"/> AM

OPTICAL

Beam angle:	12/20/30
Distribution:	Symmetrical

ELECTRICAL

Gear:	HEP LED Driver
Voltage(V):	100-240
Rated current:	350mA
Dimming:	-

