

Sleek and modern design outdoor wall-recessed LED luminaire features high quality CREE LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

### GLOS SMILEY-R WALL-RECESSED LUMINAIRE


Mounting:	Wall-recessed
Lamp:	CREE LED 3W (700mA)
CRI:	80 (90 optional)
IP:	IP 54; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> RE <input type="checkbox"/> BL <input type="checkbox"/> GR <input type="checkbox"/> AM


### OPTICAL

Beam angle:	-
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	-

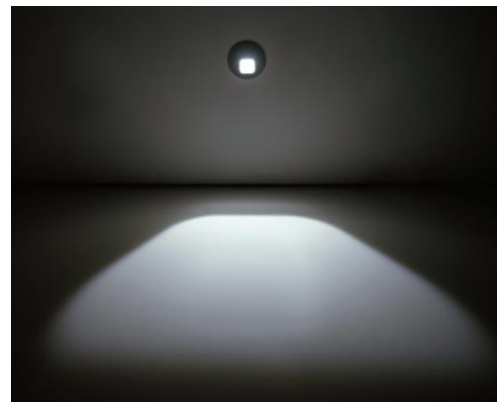

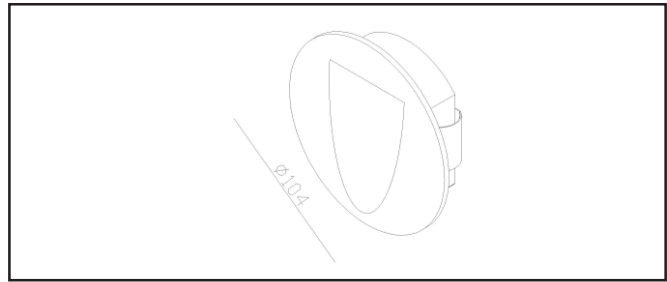

Sleek and modern design outdoor wall-recessed LED luminaire features high quality CREE LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

### GLOS SMILEY RD-R WALL-RECESSED LUMINAIRE

Mounting:	Wall-recessed
Lamp:	CREE LED 3W (700mA)
CRI:	80 (90 optional)
IP:	IP 54; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> RR <input type="checkbox"/> BL <input type="checkbox"/> GR <input type="checkbox"/> AM



### OPTICAL

Beam angle:	-
Distribution:	Symmetrical

### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	-



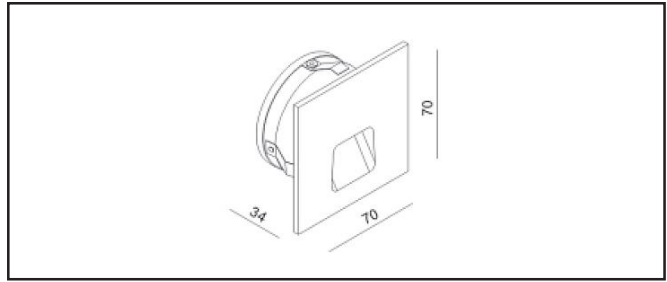

Sleek and modern design outdoor wall-recessed LED luminaire features high quality TSMC LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

### GLOS PLUTO-SQ WALL-RECESSED LUMINAIRE

Mounting:	Wall-recessed
Lamp:	TSMC LED 3W (700mA)
CRI:	80 (90 optional)
IP:	IP 54; Outdoor
Material:	Aluminum; powder-coated
Color:	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SY
LED CCT:	<input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> RR <input type="checkbox"/> BL <input type="checkbox"/> GR <input type="checkbox"/> AM

### OPTICAL


Beam angle:	-
Distribution:	Symmetrical




### ELECTRICAL

Gear:	Integral LED Driver
Voltage(V):	220-240
Rated current:	700mA
Dimming:	-

### ACCESSORIES

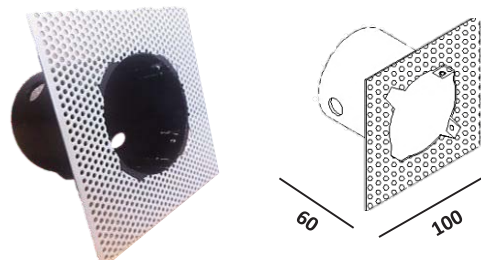

Recess housing; plastic, black.  
(Recess depth to be > 60mm)

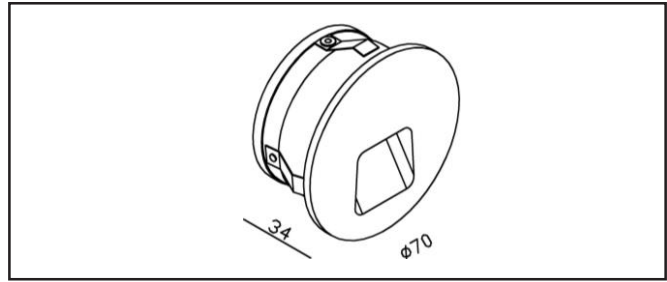

Sleek and modern design outdoor wall-recessed LED luminaire features high quality TSMC LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Efficient light distribution for outdoor applications, such as guide-lightings for hall, foyer, corridor, residential and commercial applications.

**GLOS PLUTO-RD WALL-RECESSED LUMINAIRE**

- Mounting: Wall-recessed
- Lamp: TSMC LED 3W (700mA)
- CRI: 80 (90 optional)
- IP: IP 54; Outdoor
- Material: Aluminum; powder-coated
- Color:  WH  BK  SY
- LED CCT:  CW  NW  WW  RR  BL  GR  AM

**OPTICAL**


- Beam angle: -
- Distribution: Symmetrical



**ELECTRICAL**

- Gear: Integral LED Driver
- Voltage(V): 220-240
- Rated current: 700mA
- Dimming: -

**ACCESSORIES**

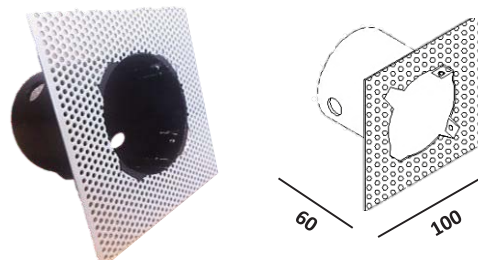

Recess housing: plastic, black.  
(Recess depth to be > 60mm)