

A surface-mounted luminaire features SHARP ZENIGATA CoB LED providing energy-efficient and low-maintenance lighting solutions. General/Accent lighting for concrete and false ceiling for residences, commercial and retail applications.

GLOS PIXEL SQUARE-2 SURFACE-MOUNTED LUMINAIRE

| | |
|-----------|--|
| Mounting: | Surface-mounted |
| Lamp: | SHARP ZENIGATA CoB LED 9W/850lm |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Die-cast aluminum; powder-coated |
| Color: | <input type="checkbox"/> WH <input checked="" type="checkbox"/> BK |
| LED CCT: | 3000K |


OPTICAL



| | |
|---------------|-------------|
| Optics: | Reflector |
| Beam angle: | 60 |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|------------|
| Gear: | LED driver |
| Voltage(V): | 220-240 |
| Rated current: | 250mA |
| Dimming: | - |

PHOTOMETRIC

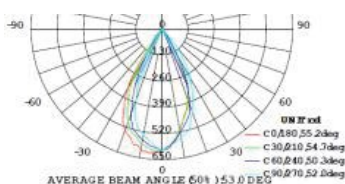

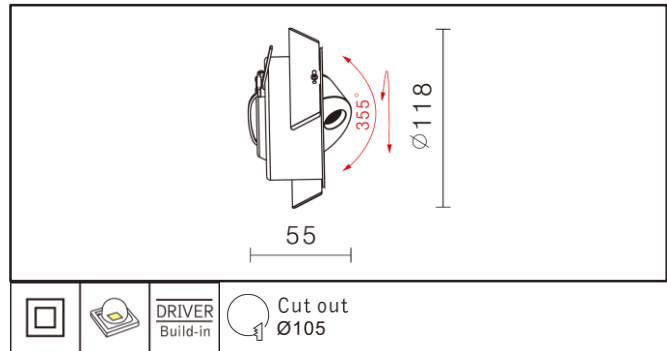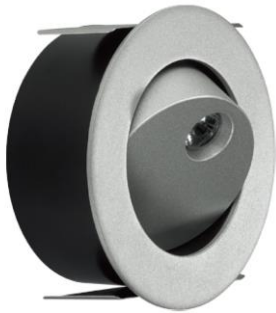


Unique design indoor wall-recessed LED luminaire featuring single high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Designed for bed side reading lamp and able to flip 180° tilt to maximize lighting range.

Reading lamp for bed or bedside cabinet in hotel and living room.

GLOS TURNER-R RECESSED WALL LUMINAIRE

- Mounting: Wall-recessed
- Lamp: OSRAM OSLON LED 3W (700mA)
- CRI: 80 (90 optional)
- IP: IP 20; Indoor
- Material: Die-cast aluminum, powder-coated
- Color: WU BK SY
- LED CCT: WW NW CW
- Indicator light: ϕ 5 LED 0.06W

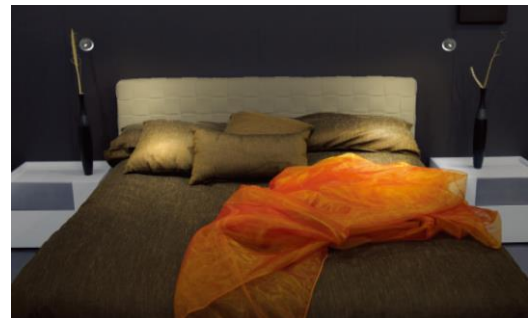


OPTICAL



- Beam angle: 8/12/24/36
- Distribution: Symmetrical

ELECTRICAL

- Gear: LED Driver
- Voltage(V): 100-240
- Rated current: 700mA
- Dimming: -

PHOTOMETRIC

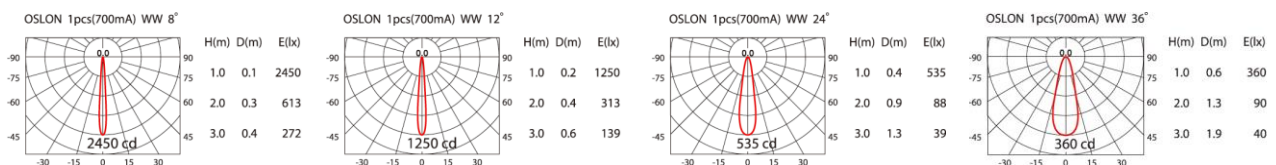

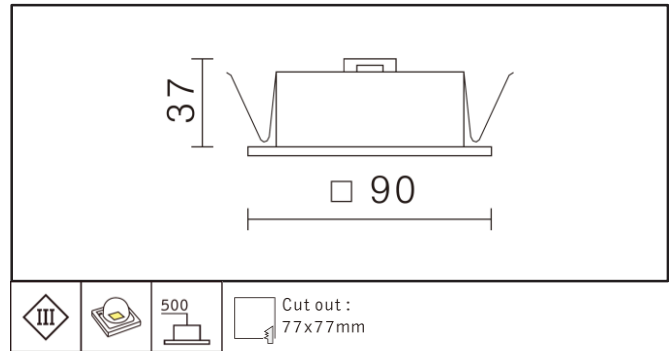

Clean-cut design indoor wall-recessed LED luminaire featuring single high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Decorative or guide lighting for museums, corridor, offices and commercial applications.

GLOS SQUARE 90 RECESSED WALL LUMINAIRE

- Mounting: Wall-recessed
- Lamp: OSRAM GD PLUS LED 1.2W (350mA)
- CRI: 80 (90 optional)
- IP: IP 20; Indoor
- Material: Die-cast aluminum, powder-coated
- Color: WH BK SV
- LED CCT: CW WW WW RR BL GR AM


OPTICAL


- Optics: -
- Beam angle: 90
- Distribution: Symmetrical

ELECTRICAL

- Gear: HEP LED Driver
- Voltage(V): 220-240
- Rated current: 350mA
- Dimming: -

PHOTOMETRIC

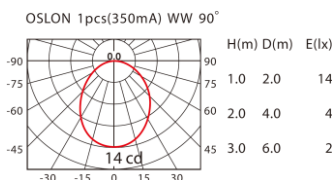

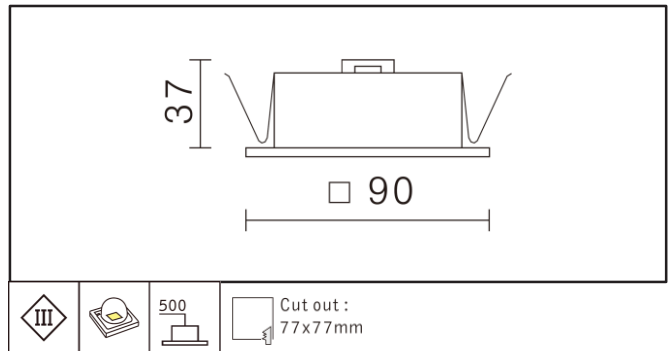

Clean-cut design indoor wall-recessed LED luminaire featuring single high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Decorative or guide lighting for museums, corridor, offices and commercial applications.

GLOS SCOOP 90 RECESSED WALL LUMINAIRE

| | |
|-----------|------------------------------------|
| Mounting: | Wall-recessed |
| Lamp: | OSRAM GD PLUS LED 1.2W (350mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Die-cast aluminum, powder-coated |
| Color: | □ WH ■ BK ■ SV |
| LED CCT: | □ CW ■ WW ■ YW ■ RW ■ BK ■ GR ■ AM |


OPTICAL

| | |
|---------------|-------------|
| Optics: | - |
| Beam angle: | - |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|----------------|
| Gear: | HEP LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 350mA |
| Dimming: | - |



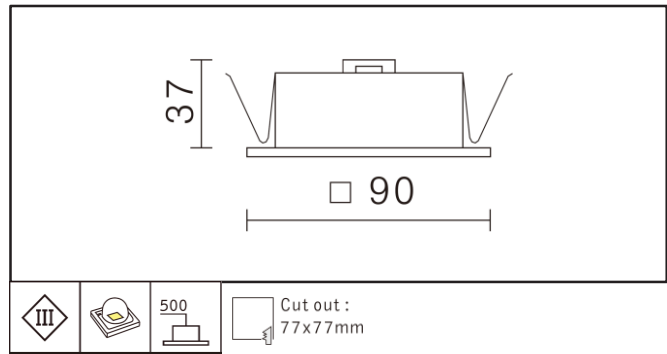

Clean-cut design indoor wall-recessed LED luminaire featuring single high quality OSRAM GD PLUS LED providing energy-efficient and low-maintenance lighting solutions. Completed with steel recess box for easy maintenance and servicing.

Decorative or guide lighting for museums, corridor, offices and commercial applications.

GLOS LDL-EDI RECESSED WALL LUMINAIRE

| | |
|-----------|--|
| Mounting: | Wall-recessed |
| Lamp: | OSRAM GD PLUS LED 1.2W (350mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Die-cast aluminum, powder-coated |
| Color: | <input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SV |
| LED CCT: | <input type="checkbox"/> CW <input type="checkbox"/> NW <input type="checkbox"/> WW <input type="checkbox"/> R <input type="checkbox"/> BL <input type="checkbox"/> GR <input type="checkbox"/> AM |



OPTICAL

| | |
|---------------|-------------|
| Optics: | - |
| Beam angle: | - |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|----------------|
| Gear: | HEP LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 350mA |
| Dimming: | - |



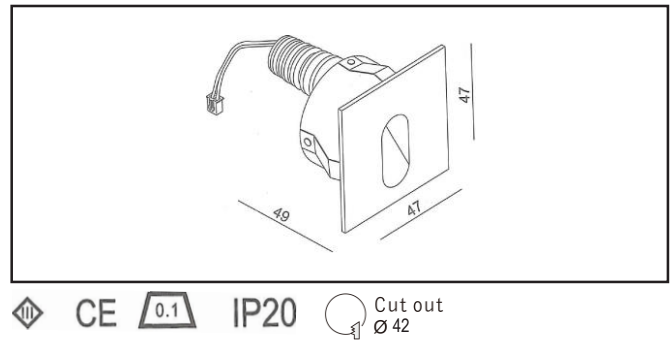

A recessed wall LED luminaire features single CREE XP-E providing energy-efficient and low-maintenance lighting solutions. Completed with recess box for easy maintenance and servicing.

Used as decorative lightings or guide-lightings for hall, foyer, corridor, residential and commercial applications.

GLOS KEYHOLE-SQ RECESSED WALL LUMINAIRE

| | |
|-----------|--------------------------|
| Mounting: | Wall-recessed |
| Lamp: | CREE XP-E 3W (700mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Aluminum, powder-coated. |
| Color: | □ WH ■ BK ■ SY |
| LED CCT: | ■ WW |


OPTICAL


| | |
|---------------|-------------|
| Beam angle: | 28.6 |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|---------------------|
| Gear: | Integral LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 700mA |
| Dimming: | - |

PHOTOMETRIC



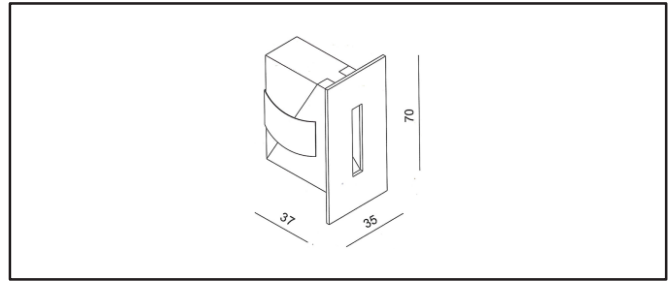

A recessed wall LED luminaire features single CREE XP-E providing energy-efficient and low-maintenance lighting solutions. Completed with recess box for easy maintenance and servicing.

Used as decorative lightings or guide-lightings for hall, foyer, corridor, residential and commercial applications.

GLOS MINI BEAM RECESSED WALL LUMINAIRE

| | |
|-----------|--|
| Mounting: | Wall-recessed |
| Lamp: | CREE XP-E 3W (700mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Aluminum, powder-coated. |
| Color: | <input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY |
| LED CCT: | <input checked="" type="checkbox"/> WW |


OPTICAL

| | |
|---------------|-------------|
| Beam angle: | - |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|---------------------|
| Gear: | Integral LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 700mA |
| Dimming: | - |



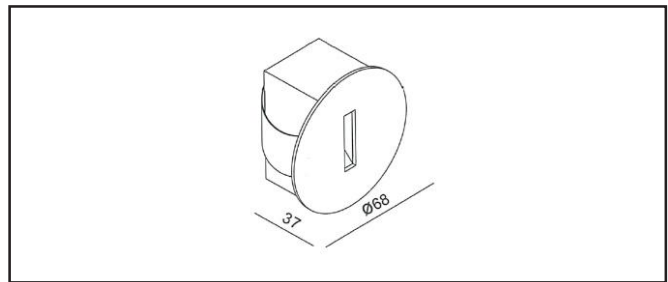

A recessed wall LED luminaire features single CREE XP-E providing energy-efficient and low-maintenance lighting solutions. Completed with recess box for easy maintenance and servicing.

Used as decorative lightings or guide-lightings for hall, foyer, corridor, residential and commercial applications.

GLOS MINI BEAM-RD RECESSED WALL LUMINAIRE

| | |
|-----------|--|
| Mounting: | Wall-recessed |
| Lamp: | CREE XP-E 3W (700mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Aluminum, powder-coated. |
| Color: | <input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY |
| LED CCT: | <input checked="" type="checkbox"/> WW |


OPTICAL

| | |
|---------------|-------------|
| Beam angle: | - |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|---------------------|
| Gear: | Integral LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 700mA |
| Dimming: | - |



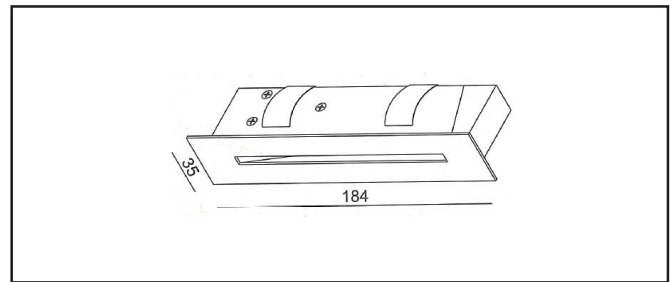

A recessed wall LED luminaire features single CREE XP-E providing energy-efficient and low-maintenance lighting solutions. Completed with recess box for easy maintenance and servicing.

Used as decorative lightings or guide-lightings for hall, foyer, corridor, residential and commercial applications.

GLOS MINI BEAM-L RECESSED WALL LUMINAIRE

| | |
|-----------|--|
| Mounting: | Wall-recessed |
| Lamp: | CREE XP-E 3W (700mA) |
| CRI: | 80 (90 optional) |
| IP: | IP 20; Indoor |
| Material: | Aluminum, powder-coated. |
| Color: | <input type="checkbox"/> WH <input checked="" type="checkbox"/> BK <input type="checkbox"/> SY |
| LED CCT: | <input checked="" type="checkbox"/> WW |

OPTICAL

| | |
|---------------|-------------|
| Beam angle: | - |
| Distribution: | Symmetrical |

ELECTRICAL

| | |
|----------------|---------------------|
| Gear: | Integral LED Driver |
| Voltage(V): | 220-240 |
| Rated current: | 700mA |
| Dimming: | - |

